


## VPU PV I+II 3 R 1500

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

### Product image

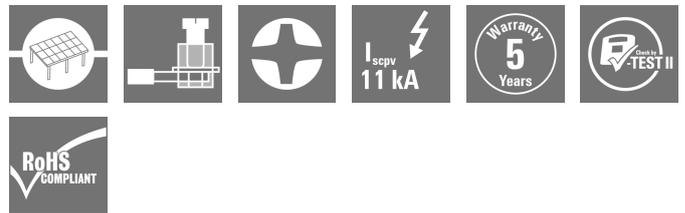

### General ordering data

Version	Surge voltage arrester, Low voltage, with remote contact
Order No.	<a href="#">2530590000</a>
Type	VPU PV I+II 3 R 1500
GTIN (EAN)	4050118540802
Qty.	1 ST

VPU PV I+II 3 R 1500

Weidmüller Interface GmbH & Co. KG  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	<a href="#">UL Website</a>
Certificate No. (cURus)	E3542610000

Dimensions and weights

Depth	86 mm	Depth (inches)	3.3858 inch
Height	102 mm	Height (inches)	4.0157 inch
Width	54 mm	Width (inches)	2.126 inch
Net weight	480 g		

Temperatures

Storage temperature	85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Rated data UL

Ambient temperature (operational), max.	85 °C	Rated Voltage UN	1500 V
SCCR	65 kA	In	20 kA
Category	SPD TYPE 1CA	Ambient temperature (operational), min.	-40 °C
Certificate No. (cURus)	E3542610000	VPR ( DC+ /DC-)	4000 V
VPR ( DC-/G)	4000 V	Voltage type	DC

Connection data, remote alert

Cross-section for connected wire, solid core, min.	0.25 mm <sup>2</sup>	Stripping length	12 mm
Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm <sup>2</sup>

General data

Optical function display	green = OK; red = arrester is defective - replace	Version	with remote contact
Design	Installation housing; 3TE, Insta IP 20	UL 94 flammability rating	V-0
Colour	black, orange	Protection degree	IP20
Rail	TS 35	Operating altitude	<4,000 m, see operating instructions, ≤ 4000 m

Insulation coordination acc. to EN 50178

Surge voltage category	III	Pollution severity	2
------------------------	-----	--------------------	---

## VPU PV I+II 3 R 1500

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

### Photovoltaic technical data

Standards	EN 61643-31, EN 50539-11, UL 1449	Lightning test current Iimp (10/350 µs)	5 kA
Protection level Up (+/-, -/PE, +/-PE)	≤ 5,0 kV	Operating height in ungrounded PV system	≤ 4000 m
Short-circuit current ISCP	11000 A	Total discharge current Itotal (8/20µs)	40 kA
Discharge current In (8/20 µs)	20 kA	Operating height in the grounded PV system	≤ 2000 m
Total discharge current Itotal (10/350µs)	10 kA	PV system voltage, max. Ucpv	1500 V

### Rated data IEC / EN

Number of poles	3	Leakage current at Un	30 µA
Signalling contact	250 V 1A 1CO	Rated voltage (DC)	1500 V
Voltage type	DC	Response time	≤ 25 ns
Standards	EN 61643-31, EN 50539-11, UL 1449	Lightning test current Iimp (10/350 µs)	5 kA
Discharge current Imax (8/20µs) wire-PE	30 kA	SPD type	T1, T2
Integrated back-up fuse	No		

### Connection data

Stripping length	18 mm	Type of connection	Screw connection
Stripping length, rated connection	18 mm	Tightening torque, min.	3 Nm
Tightening torque, max.	4.5 Nm	Clamping range, rated connection	6 mm <sup>2</sup>
Clamping range, min.	1.5 mm <sup>2</sup>	Clamping range, max.	35 mm <sup>2</sup>
Wire cross-section, solid, min.	1.5 mm <sup>2</sup>	Wire cross-section, solid, max.	16 mm <sup>2</sup>
Wire connection cross section, finely stranded, min.	1.5 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	25 mm <sup>2</sup>
Connection cross-section, stranded, min.	1.5 mm <sup>2</sup>	Connection cross-section, stranded, max.	35 mm <sup>2</sup>

### Electrical data

Voltage type	DC
--------------	----

### General data

Number of poles	3	Protection degree	IP20
Colour	black, orange		

### Guarantee


Time interval	5 years
---------------	---------

### Classifications

ETIM 7.0	EC001457	ETIM 8.0	EC001457
ETIM 9.0	EC001457	ETIM 10.0	EC001457
ECLASS 12.0	27-17-14-03	ECLASS 13.0	27-17-14-03
ECLASS 14.0	27-17-14-03	ECLASS 15.0	27-17-14-03

Drawings

Electric symbol

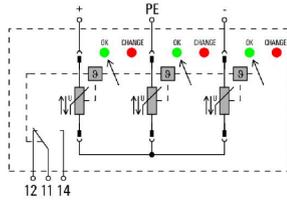

Circuit diagram


## VPU PV I+II 3 R 1500

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

## Crosshead screwdriver Phillips

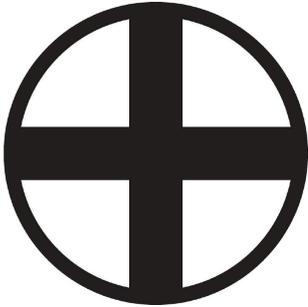

VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

## General ordering data

Type	SDIK PH1 X 80	Version	
Order No.	<a href="#">2749890000</a>	Screwdriver, Blade width (B): 1 mm, 80 mm, Blade thickness (A): 1	
GTIN (EAN)	4050118897098		
Qty.	1 ST		

## Slotted screwdriver




VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip

## General ordering data

Type	SDIS 1.0X5.5X125	Version	
Order No.	<a href="#">2749850000</a>	Screwdriver, Blade width (B): 5.5 mm, Blade length: 125 mm, Blade thickness (A): 1 mm	
GTIN (EAN)	4050118897050		
Qty.	1 ST		

## Blank

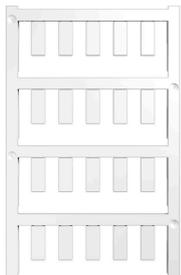

ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc.

Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**VPU PV I+II 3 R 1500**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**General ordering data**

Type	ESG 6/15 K MC NE WS	Version	
Order No.	<a href="#">1880100000</a>	ESG, Device markers x 15 mm, PA 66, Colour: white, Self-adhesive	
GTIN (EAN)	4032248478781		
Qty.	200 ST		

**VPU Series**



Extensive accessories round off the product range

**General ordering data**

Type	VPU PV EXTENDER	Version	
Order No.	<a href="#">3123510000</a>		
GTIN (EAN)	4099987270199		
Qty.	9 ST		

**Spare Arrester**



**General ordering data**

Type	VPU PV I+II O 1500	Version	
Order No.	<a href="#">2530570000</a>	Surge voltage arrester, Low voltage, Accessories, Spare arrester	
GTIN (EAN)	4050118540482		
Qty.	9 ST		
Type	VPU PV I+II OM 1500	Version	
Order No.	<a href="#">2534330000</a>	Surge voltage arrester, Low voltage, Accessories, Spare arrester	
GTIN (EAN)	4050118546002		
Qty.	9 ST		

## VPU PV I+II 3 R 1500

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

### VPU Series



Extensive accessories round off the product range

### General ordering data

Type	PLUG VPU AC	Version	
Order No.	<a href="#">2855300000</a>		
GTIN (EAN)	4064675533283		
Qty.	10 ST		
Type	VPU LOCKING CLIP L	Version	
Order No.	<a href="#">2735070000</a>		
GTIN (EAN)	4050118816402		
Qty.	10 ST		