

PRC 20/M17-5E-FC-FC 6-14 GN - Coupler connector



1636030

<https://www.phoenixcontact.com/us/products/1636030>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupler connector, Range of articles: PRC 20, design: Straight, color: black, number of positions: 6, min. conductor cross-section: 0.75 mm², max. conductor cross-section: 1 mm², rated voltage: Dreiphasig 630 V AC, rated current: 8 A, Connection method: Crimp connection, min. cable diameter: 6 mm, max. cable diameter: 14 mm, Setting option for release: 1. with a tool or 2. by hand

Your advantages

- Duo-Unlock technology for greater flexibility during installation and maintenance
- Reliable use under extreme ambient conditions with high degrees of protection and impact strength
- Easy handling with proven crimp connection technology
- Mechanical and color coding for quick and error-free startup

Commercial data

Item number	1636030
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB03
Product key	ABLHMB
GTIN	4067923157699
Weight per piece (including packing)	44.2 g
Weight per piece (excluding packing)	32.021 g
Customs tariff number	85366990
Country of origin	PL

PRC 20/M17-5E-FC-FC 6-14 GN - Coupler connector



1636030

<https://www.phoenixcontact.com/us/products/1636030>

Technical data

Notes

Order information:	Setting option for release: 1. with a tool or 2. by hand
Note on application	For assembly notes, please refer to the packing slip

Product properties

Product type	Installation connector
Product family	PRC 20
Type	Straight
Number of positions	6
Connection profile	5+PE
Coding	M17 5+PE

Insulation characteristics

Protection class	II (double or reinforced insulation)
------------------	--------------------------------------

Electrical properties

Nominal voltage ATD	Dreiphasig 630 V AC (III/2.00) in accordance with IEC 61984
	500 V DC (III/2.00) in accordance with IEC 61984
Rated current	8 A (with 1 mm ² conductor cross-section in accordance with IEC 61984)
	6 A (with 0.75 mm ² conductor cross-section in accordance with IEC 61984)

Dimensions

Width	28.5 mm
Height	28.5 mm
Length	80.5 mm

Material specifications

Color (Housing)	black (RAL 9005)
-----------------	------------------

Cable/line

External cable diameter	6 mm ... 14 mm
Single wire, cross section	0.75 mm ² 1 mm ²
Halogen-free	yes (in accordance with IEC 61249-2-21:2003- 11 Cl.3.1)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	100
-----------------------------	-----

Environmental and real-life conditions

Ambient conditions

PRC 20/M17-5E-FC-FC 6-14 GN - Coupler connector



1636030

<https://www.phoenixcontact.com/us/products/1636030>

Degree of protection	IP66
	IP66 (2 m / 2 h)
	IP69
Category of shock impact	IK08 (-25°C)
Ambient temperature (operation)	-40 °C ... 85 °C (observe derating)
Ambient temperature (storage/transport)	-10 °C ... 50 °C
Ambient temperature (assembly)	-5 °C ... 50 °C

Standards and regulations

Standards/specifications	IEC 61984:2008
--------------------------	----------------

PRC 20/M17-5E-FC-FC 6-14 GN - Coupler connector




1636030


<https://www.phoenixcontact.com/us/products/1636030>

Drawings

Schematic diagram

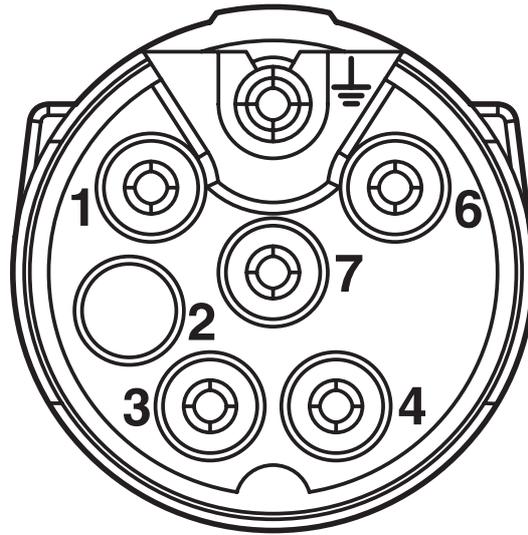

Connector pin assignment

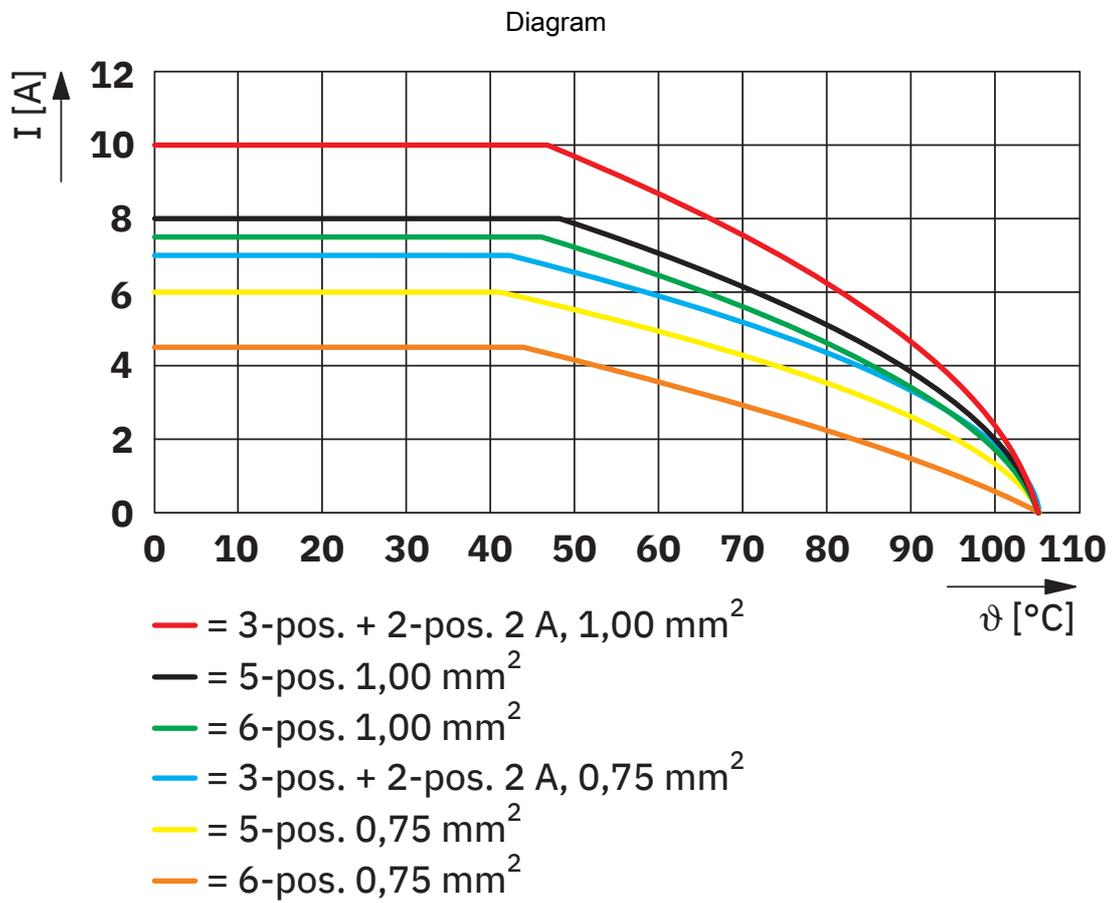

Derating

1636030

<https://www.phoenixcontact.com/us/products/1636030>

Classifications

ECLASS

ECLASS-13.0	27440116
ECLASS-15.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

PRC 20/M17-5E-FC-FC 6-14 GN - Coupler connector



1636030

<https://www.phoenixcontact.com/us/products/1636030>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	Triphenyl phosphate(CAS: 115-86-6)
SCIP	cb4fc3bc-110a-4907-8e7d-e2836968e181

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com