

42236-1 ✓ ACTIVE

FASTON | FASTON 110


TE Internal #: 42236-1

Quick Disconnect Receptacle, Uninsulated, 22 – 20 AWG, .32 – .51 mm<sup>2</sup> Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Straight, Brass, FASTON 110

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

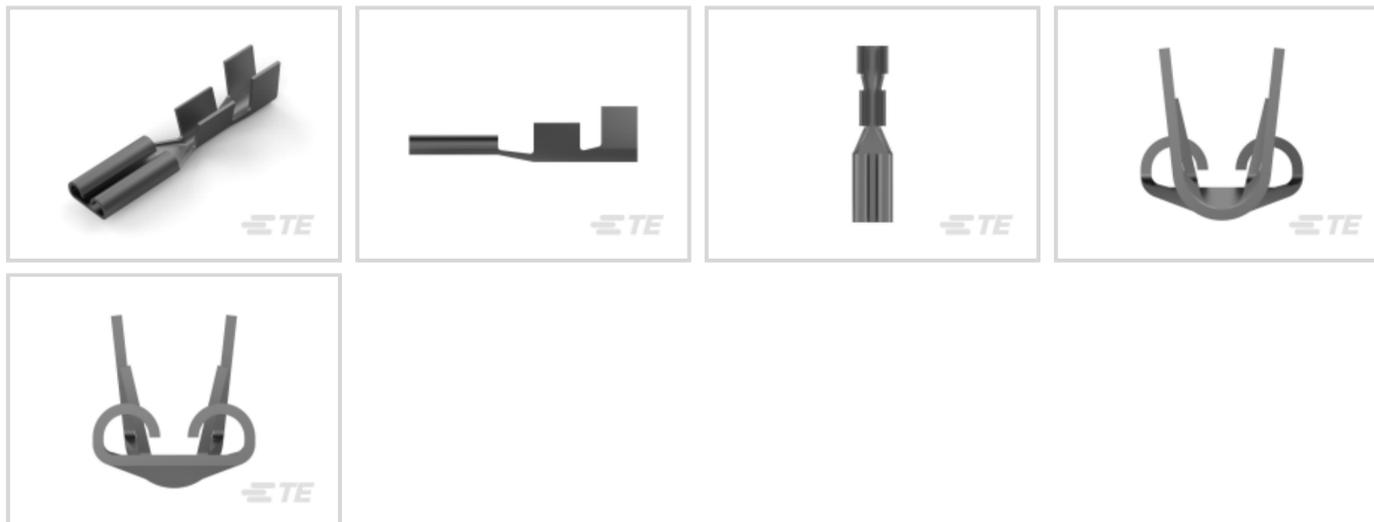

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .32 – .51 mm<sup>2</sup>

Mating Tab Width: 2.8 mm [.11 in]

Mating Tab Thickness: .51 mm [.02 in]

## Features

### Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm [.11 in]
Mating Tab Thickness	.51 mm [.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

### Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

### Mechanical Attachment



Wire Insulation Support	With
-------------------------	------

Mating Retention Type	Dimple
-----------------------	--------

### Dimensions

Product Length	16.05 mm [.632 in]
----------------	--------------------

Compatible Insulation Diameter Range	1.52 – 2.54 mm [.06 – .1 in]
--------------------------------------	------------------------------

Terminal Material Thickness	.25 mm [.01 in]
-----------------------------	-----------------

Wire Size	.32 – .51 mm <sup>2</sup>
-----------	---------------------------

### Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]
-----------------------------	-----------------------------

### Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

### Packaging Features

Packaging Quantity	15000
--------------------	-------

Packaging Method	Strip/Reel
------------------	------------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	--

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 2150049-2  
OCEAN-2.0-APPLICATOR-E-062F090FA-REA

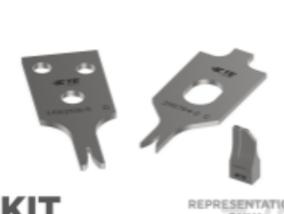

**KIT**  
REPRESENTATION ONLY


TE Part # 7-2150636-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-062F090OV



TE Part # 2150636-1  
OCEAN-2.0-APPLICATOR-E-062F090OV-REM



TE Part # 2150049-1  
OCEAN-2.0-APPLICATOR-E-062F090F-REM

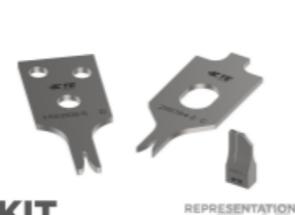

**KIT**  
REPRESENTATION ONLY

TE Part # 7-2150049-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-062F090F



TE Part # 2150636-2  
OCEAN-2.0-APPLICATOR-E-062F090OV-REA

## Also in the Series | FASTON 110



Crimp Terminal Housings(13)



Insertion & Extraction Tools(1)



PCB Terminals(22)



Quick Disconnects(164)

## Customers Also Bought



TE Part #K1060611  
Relay 29-311-12A




TE Part #K1023751  
Relay 29-212-12A




TE Part #41580  
RING TERMINAL 24-20 AWG TPBR



TE Part #2-215083-4  
MICRO-MATCH MOW.24P

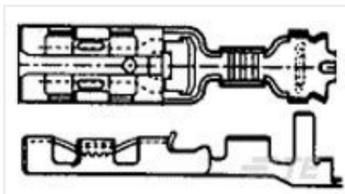

TE Part #353249-2  
110 PL EX REC. 26-22AWG PTPHBZ

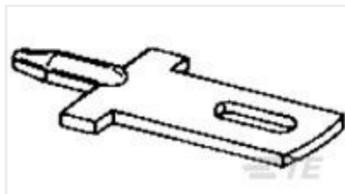

TE Part #735187-2  
110 FASTON TAB TPBR



TE Part #4-1614881-8  
CPF 0603 33R 0.1% 25PPM 5K RL



TE Part #1-2317570-3  
AV22 DPM 3A MOVING RING R&G  
12V



TE Part #3-2317570-0  
AV22 SPM 3A MOVING RING R&G  
12V FL



TE Part #1-5745967-6  
25 RCPT SP/FMS SCRLK

## Documents

### Product Drawings

[110 FASTON REC 22-20 AWG TPBR](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_42236-1\\_AR.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_42236-1\\_AR.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_42236-1\\_AR.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

### Product Specifications

[Application Specification](#)

English

### Agency Approvals

[UL Report](#)

42236-1

Quick Disconnect Receptacle, Uninsulated, 22 – 20 AWG, .32 – .51 mm<sup>2</sup> Wire, 2.8 mm  
[.11 in] Tab Width, F-Crimp, Straight, Brass, FASTON 110



English