


PF0033/15/63 Datasheet

Product Name // IEC Connector Snap Fit To Panel Twin
Fused Inlet PF0033 Series 1.5mm Panel 6.3mm Tab
Termination EN60 320-1 Standard Sheet C14 Class I

 [View Product Page](#)



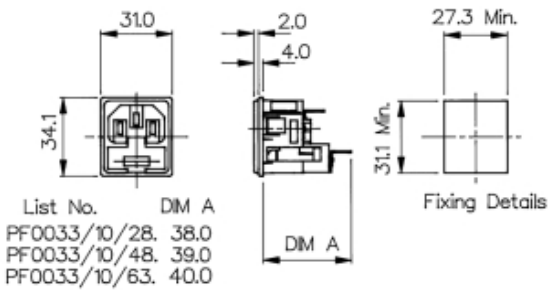

List No.	DIM A
PF0033/10/28.	38.0
PF0033/10/48.	39.0
PF0033/10/63.	40.0

// **Product Description:**

 Snap Fit Panel Mount Twin Fused IEC Inlets

 EN60 320-1 Standard Sheet C14 Class I

 Twin Fused, 5mm x 20mm fuses

 Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm

 Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab

 Insulation Boot for rear of connector available separately (part code 14317)

 Mate with PX0587, PX0587/SE, PX0588

// **General Information:**

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Current Max:

Flamability Rating:

Function:

iec Connector Mates With:

iec En60620 Type:

Max Operating Temperature:

Min Operating Temperature:

Max Panel Thickness:

Min Panel Thickness:

Number Of Contacts:

Rohs Compliant:

Voltage Max:

Snap Fit Panel Mount Twin Fused IEC Inlets

IEC Connectors

IEC60320 Main Inlets and Outlets

CSA

Nylon 66

10A

UL94V-0

Panel Mount Fused Connector

PX0587,PX0587/SE,PX0588

EN60 320-1 Standard Sheet C14 Class I

+70°C

-20°C

1.5mm

1.5mm

3 Contacts

Yes

250V

// **Product PDF Links**

 [IEC Connectors product data](#)

// **Product 3D CAD Model Links**

 [PF0033/15/633D CAD Model](#)