CONMMCX002-SMD-T ✔ ACTIVE

MMCX

TE Internal #: CONMMCX002-SMD-T

MMCX Connector, Jack, 50 ohm, Snap-On, 6 GHz, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder, Right Angle, MMCX

View on TE.com >

Connectors > RF Connectors > Coax Connectors

RF Interface: **MMCX**

RF Connector Style: **Jack**

Impedance: **50 Ω**

RF Connector Coupling Mechanism: **Snap-On**

Operating Frequency Range: **6 GHz**

Features

Product Type Features

Connector Product Type	Connector Assembly
RF Interface	MMCX
RF Connector Style	Jack
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω

Body Features

Body Material	Brass
Body Material Finish	Plated
Body Plating Material	Gold

Contact Features

RF Connector Center Contact Plating Material	Gold (Au)

RF Connector Center Contact Material	Beryllium Copper

Termination Features

Termination Method to PCB	Surface Mount
Termination Method to Wire & Cable	Solder

Mechanical Attachment

RF Connector Coupling Mechanism	Snap-On
Connector Mounting Type	Board Mount
RF Contact Captivation Method	Mechanical
Detent	Without

Housing Features

Body Orientation	Right Angle

Usage Conditions

Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]

Operation/Application

Circuit Application	Signal
Operating Frequency Range	6 GHz

Packaging Features

Packaging Quantity	1750
Packaging Method	Tape & Reel

Other

Dielectric Material	Polytetrafluoroethylene (PTFE)

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (1.8% in M-43516-1) Article Safe Usage Statements:

	Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

TE Part # 2480671-1
MMCX M to MMCX M RA RG178 50 Ohm 6"

TE Part # L9000045-01
Antenna 2.4 FPC LV 7x45 100 MMCX

TE Part # ANT-868-WRT-MMCX
Antenna Dome R-Angle 868MHz RG174 MMCX

TE Part # L9000036-01
Antenna 2.4 FPC LH 45x7 100 MMCX

Also in the Series | MMCX

Coax Connectors(22)

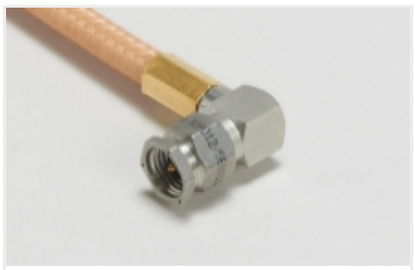

RF Cable Assemblies(3)

Customers Also Bought

MMCX Connector, Jack, 50 ohm, Snap-On, 6 GHz, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder, Right Angle, MMCX

TE Part #CONMMCX002-SMD
MMCX Jack 50 Ohm PCB Surface Mount

TE Part #CONSMA008
SMA Jack 50 Ohm PCB Through Hole

TE Part #CONREVSMA008
RP-SMA Jack 50 Ohm PCB Through Hole

TE Part #130054
PG RING

TE Part #8-338069-8
MICRO-MATCH SMD FTE



TE Part #1-770969-1
06P MINI UMNL R/A HDR ASSY LF



TE Part #827001-2
4P MNL STIFTSOCKEL

TE Part #3-2176217-3
CPF A 0805 1K0 0.1% 25PPM 1K RL

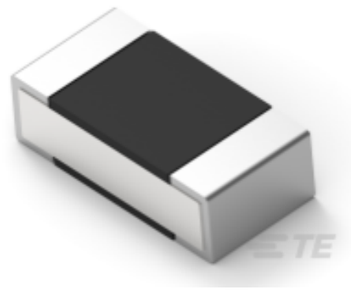

TE Part #2-2176308-3
RP 1E 0.1W 226K 0.1% 25PPM 5K RL

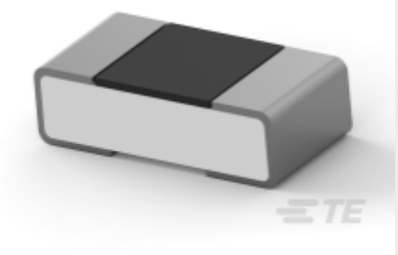

TE Part #2176361-4
RQ 0402 4K99 0.1% 10PPM 1K RL

Documents

Product Drawings

MMCX Jack 50 Ohm PCB Surface Mount

English

CAD Files

Customer View Model

ENG_CVM_CVM_CONMMCX002-SMD-T_E.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_CONMMCX002-SMD-T_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_CONMMCX002-SMD-T_E.3d_igs.zip

English