

HVP

1/4" x 1-1/4" High voltage panel mount fuse holder



Photo is representative

Product features

- Compact, front panel mount fuse holder 1/4" x 1 1/4" (6.3 mm x 32 mm) fuses
- High voltage rating and current rating, up to 480 V and 30 A for higher power assemblies
- Bayonet-type knob as fuse carrier
- Robust design provides vibration resistance
- Tin plated brass terminals
- Thermoset fuse holder body and knob
- Threaded thermoplastic nut as standard
- Optional accessories available for field replacement

Agency information

- cURus Recognized: File E14853 Guide IZLT2, IZLT8
- CE



Environmental compliance

- RoHS compliant
- WEEE compliant



General specifications

- Temperature rating (RTI):
 - The mounting body for all devices has a temperature rating of +150 °C.
 - The knob for these devices is molded plastic with a temperature rating of +150 °C.
- Plastic body meets UL 94HB
- Terminal strength: 5 pounds
- Torque: Mounting: 15 inch-pound maximum
- Salt spray (corrosion): MIL-STD-202G, Method 101E Test condition B

Specifications

Part number	Description	Voltage rating (V)	Current rating (A)
HVP-R	Standard HVP fuse holder	480	30
HVP-W-R	Drip proof fuse knob (IP53 rated)	480	30
HVP-HH-R	1/4" Quick connects	480	30
HVP-L-R	2250 V Stand-off barrier	480	30
HVP-LW-HH-R	Drip proof knob ¹ , 2250 V stand-off, 1/4" quick connects	480	30
HVP-OO-R	Snap-lock design	480	30
HVP-CC-R	Extended panel mount	480	30

1. IP53 rating for exposed locations

Ordering details

Ordering number is the part number plus the packaging prefix. i.e. BK-HVP-R

Packaging code prefix	Description
BK-	100 fuse holders with components bagged separately



Additional accessories

Ordering number	Catalog number	Description
BK-9435-1-2	BK/9435-1-2	100 pcs of bayonet fuse knobs
BK-1A4806-2	BK/1A4806-2	100 pcs of metal fastening nuts
BK-1A4287	BK/1A4287	100 pcs of plastic fastening nuts
BK-9732	BK/9732	100 pcs of silicon washers

Dimensions- mm [inches]


HVP-OO-R

Mounting: HVP-OO-R

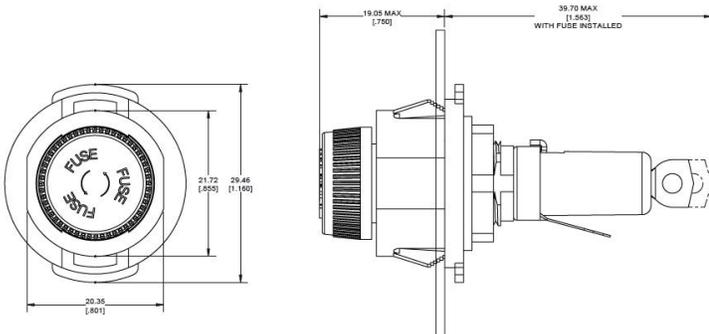


Dimensions- mm [inches]


HVP-R, HVP-L-R, HVP-W-R

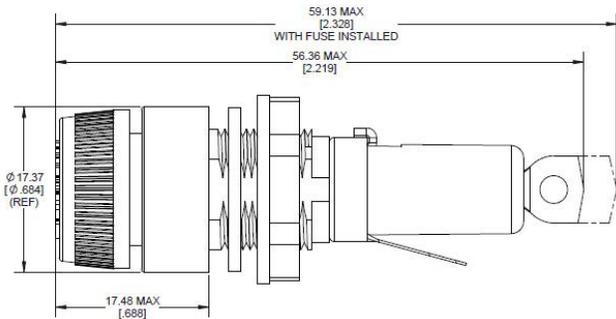


HVP-HH-R, HVP-LW-HH-R

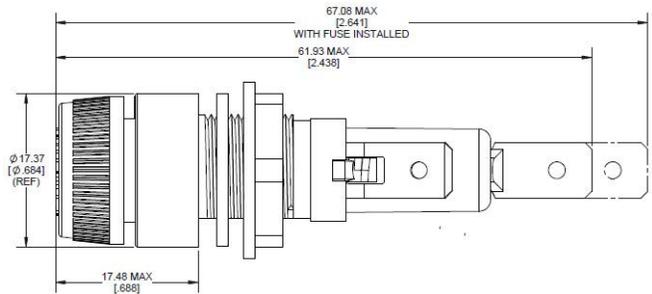

HVP-CC-R

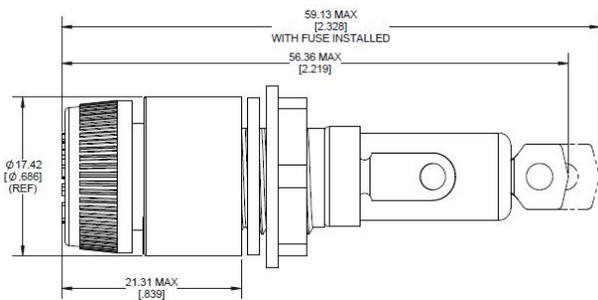

Mounting: HVP-R, HVP-L-R, HVP-W-R, HVP-HH-R, HVP-LW-HH-R, HVP-CC-R

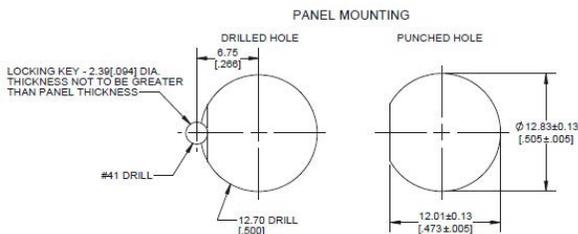

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2025 Eaton
All Rights Reserved
Printed in USA
Publication No. 11045 PCN24030
January 2025

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

