

V23092A1005A301 ✓ ACTIVE




SCHRACK | SCHRACK Slimline PCB Relay SNR

TE Internal #: 1393236-2

General Purpose Power Relay, DC, Monostable, 1 Form C SPDT-CO, 6 A Contact Rating, 5 VDC Coil Voltage, SCHRACK Slimline PCB Relay SNR

[View on TE.com >](#)

Relays & Contactors > Electromechanical Relays > SCHRACK SNR Slimline Relay Package

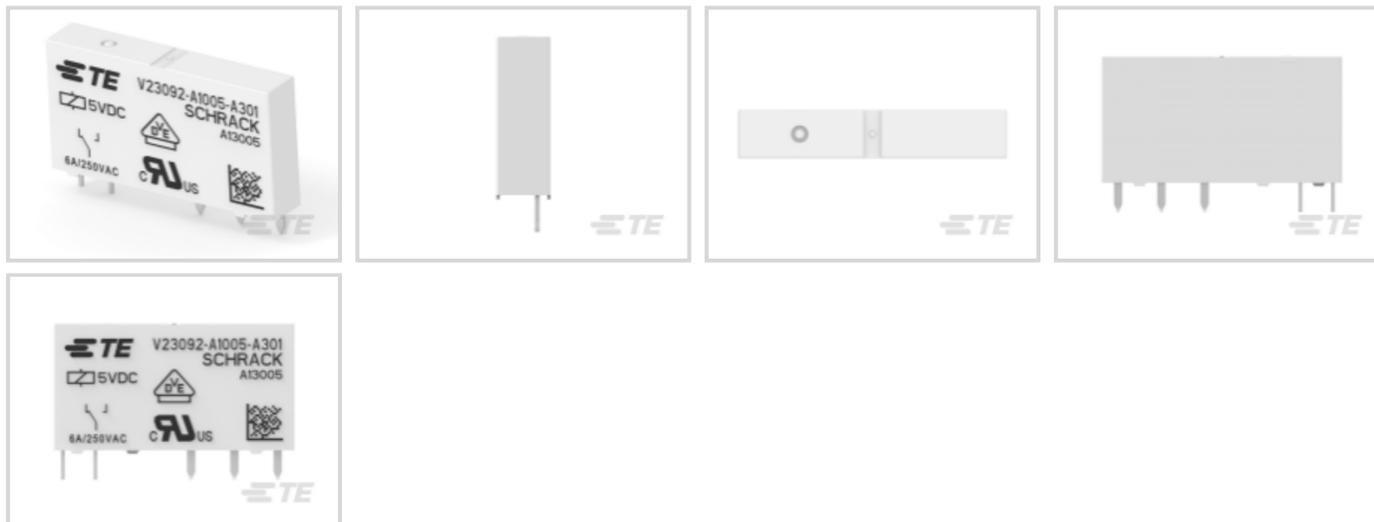

Relay & Contactor Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form C SPDT-CO**

Current Type: **DC**

Contact Current Rating: **6 A**

[All SCHRACK SNR Slimline Relay Package \(41\)](#)

## Features

### Product Type Features

|                        |                             |
|------------------------|-----------------------------|
| Relay & Contactor Type | General Purpose Power Relay |
|------------------------|-----------------------------|

### Configuration Features

|                         |                            |
|-------------------------|----------------------------|
| Contact Number of Poles | 1                          |
| Coil Special Features   | UL Coil Insulation Class F |
| Contact Arrangement     | 1 Form C SPDT-CO           |

### Electrical Characteristics

|                                     |             |
|-------------------------------------|-------------|
| Contact Limiting Short-Time Current | 6 A         |
| Contact Limiting Making Current     | 10 A        |
| Contact Limiting Continuous Current | 10 A        |
| Contact Limiting Breaking Current   | 6 A         |
| Contact Switching Voltage (Max)     | 400 VAC     |
| Contact Switching Load (Min)        | 100mA @ 12V |



|                                                       |              |
|-------------------------------------------------------|--------------|
| Coil Resistance                                       | 147 $\Omega$ |
| Contact Current Rating                                | 6 A          |
| Coil Voltage Rating                                   | 5 VDC        |
| Contact Voltage Rating                                | 250 VAC      |
| Coil Power Rating DC                                  | .17 W        |
| Insulation Initial Dielectric Between Contacts & Coil | 4000 Vrms    |

### Body Features

|                |                                                    |
|----------------|----------------------------------------------------|
| Product Weight | 6 g[.2116 oz]                                      |
| Enclosure Type | Flux Resistant Automatic Solder Capable & Washable |

### Contact Features

|                          |                    |
|--------------------------|--------------------|
| Contact Plating Material | Gold               |
| Contact Material         | AgSnO <sub>2</sub> |

### Termination Features

|                                    |             |
|------------------------------------|-------------|
| Main Termination & Connection Type | Solder Pins |
| Coil Termination & Connection Type | Solder Pins |

### Mechanical Attachment

|                    |             |
|--------------------|-------------|
| Product Mount Type | Board Mount |
|--------------------|-------------|

### Dimensions

|                                            |                 |
|--------------------------------------------|-----------------|
| Insulation Creepage Between Contact & Coil | 8 mm[.315 in]   |
| Product Width                              | 5 mm[.197 in]   |
| Product Length                             | 28 mm[1.102 in] |
| Product Height                             | 15 mm[.59 in]   |

### Usage Conditions

|                                         |                           |
|-----------------------------------------|---------------------------|
| Operating Temperature Range             | -40 – 85 °C[-40 – 185 °F] |
| Environmental Category of Protection    | RTIII                     |
| Environmental Ambient Temperature (Max) | 85 °C[185 °F]             |

### Operation/Application

|                      |                     |
|----------------------|---------------------|
| Solder Process       | Wave Solder Capable |
| Coil Magnetic System | Monostable          |
| Current Type         | DC                  |

### Packaging Features



|                  |                  |
|------------------|------------------|
| Packaging Method | Box & Tube, Tube |
|------------------|------------------|

### Other

|                           |                                 |
|---------------------------|---------------------------------|
| Coil Power Rating Class   | >.15 – ≤.2 W                    |
| Contact Current Class     | >5 – ≤10 A                      |
| Height Class (Mechanical) | >14 – ≤16 mm[>.551 – ≤.63 in]   |
| Length Class (Mechanical) | >22 – ≤33 mm[>.866 – ≤1.299 in] |
| Width Class (Mechanical)  | ≤7 mm[≤.276 in]                 |

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2025 (250)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Wave solder capable to 260°C                                                                                                    |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # 1393236-3  
V23092-A1006-A301




TE Part # 1558940-2  
SNR11-A0-1C3-D005

Also in the Series | **SCHRACK Slimline PCB Relay SNR**



DC Relays(49)

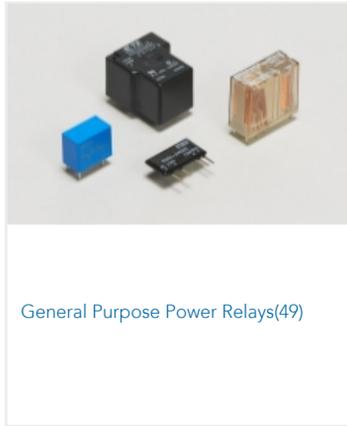

General Purpose Power Relays(49)



PCB Relays(39)

Customers Also Bought



TE Part #BAT-HLD-001-TR  
Hldr for CR2032 Battery, SMT, T&R Pkg



TE Part #848633-001  
CES-4



TE Part #4-794630-8  
18P MICRO MNL ASSY,VRT,HDR,LF



TE Part #4-1625892-9  
3W SM M/OX 5% 3R3



TE Part #1879355-2  
RR03 5% 4K7 AMMO



TE Part #2-1879499-5  
CRGH2010 5% 10R 1W



TE Part #5-2176328-5  
CRGP 1206 330K 1%



TE Part #5-2176339-7  
CRGCQ 0603 470K 1%



TE Part #5050863-8  
SOCKET,MIN-SPR SN-SN SER-2



TE Part #2-5050871-3  
SOCKET,MIN-SPR SN-AU SER-5



## Documents

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1393236-2\\_B\\_c-1393236-2-b.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1393236-2\\_B\\_c-1393236-2-b.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1393236-2\\_B\\_c-1393236-2-b.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### Slim PCB Relay SNR

English

### Product Specifications

#### Definitions General Purpose Relays

English

### Agency Approvals

#### VDE Certificate

English