



www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● **EDIT HISTORY**

Version A: Jun. 15, 2024

Preliminary Spec.

Confidential Document



Opto Plus LED Corp.
0.30” SMD Type LED Display
OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● **FEATURES**

- 0.30 inch (7.62 mm) Digit Height.
- Low current operation.
- Excellent character appearance.
- Super thin SMD type.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The device are 0.30 inch (7.62 mm) height dual digit 7-segment displays.
 The device is Opto Plus LED Corp standard LED Display.
 This device utilizes Super Bright Blue LED chip which are made from InGaN
 On a transparent GaN, substrate.
 The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● **DEVICE**

PART NO.	DESCRIPTION
OPS-D3050SB-ST-1.5-GW	Common Anode Gray face White segment
OPS-D3051SB-ST-1.5-GW	Common Cathode Gray face White segment
OPS-D3050SB-ST-1.5-BW	Common Anode Black face White segment
OPS-D3051SB-ST-1.5-BW	Common Cathode Black face White segment

RoHS Compliance




Pb Free.





Opto Plus LED Corp.
0.30'' SMD Type LED Display
OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● **MECHANICAL DIMENSIONS**

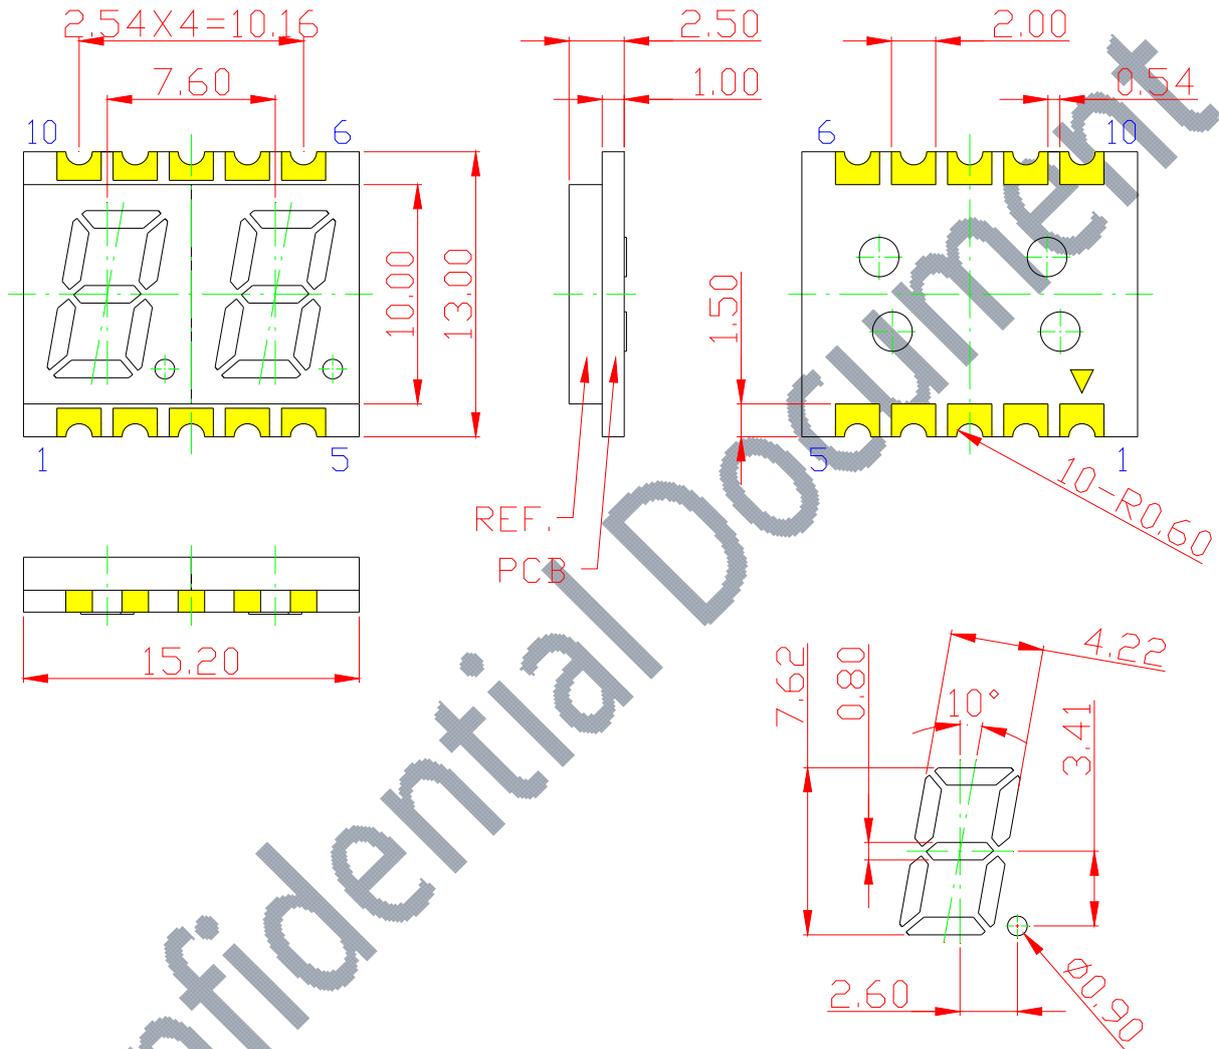

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.




Opto Plus LED Corp.

0.30'' SMD Type LED Display


OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● TYPICAL INTERNAL EQUIVALENT CIRCUIT


Turn On Color

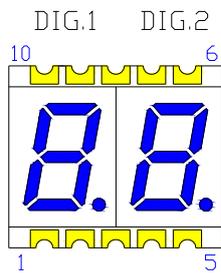


Recommended Reverse Mount Soldering Pattern

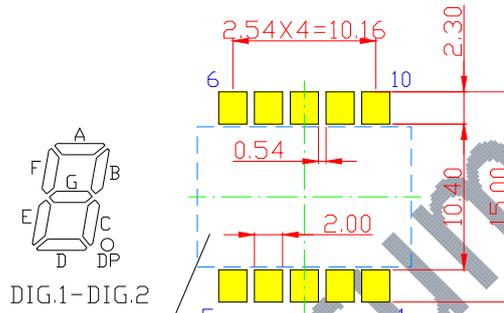

Reflector (Mounting Hole)

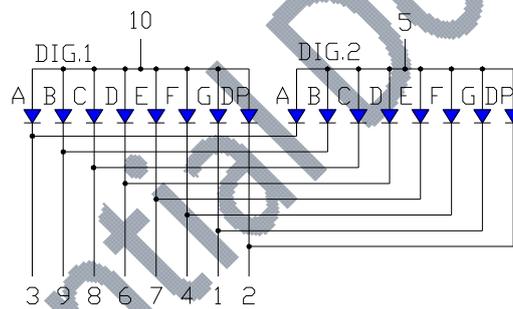

OPS-D3050SB-ST-1.5 (Common Anode)

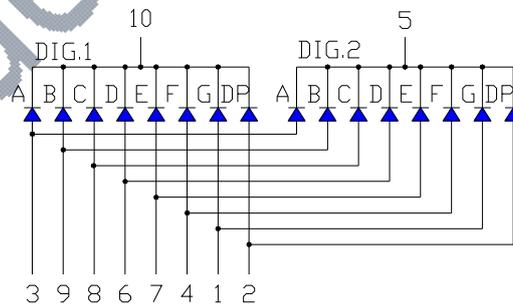

OPS-D3051SB-ST-1.5 (Common Cathode)

※EMITTED COLOR : SUPER BRIGHT BLUE



Opto Plus LED Corp.
0.30'' SMD Type LED Display
OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● **PRODUCT APPEARANCE**

The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-D3050SB-ST-1.5-GW	Common Anode Gray face White segment
OPS-D3051SB-ST-1.5-GW	Common Cathode Gray face White segment
OPS-D3050SB-ST-1.5-BW	Common Anode Black face White segment
OPS-D3051SB-ST-1.5-BW	Common Cathode Black face White segment



Opto Plus LED Corp.
0.30'' SMD Type LED Display
OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● **SB: SUPER BRIGHT BLUE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P_{AD}	90	mW
Continuous forward current	I_{AF}	30	mA
Peak current (duty cycle 1/10, 1kHz)	I_{PF}	60	mA
Reverse voltage	V_R	5	V
Operating temperature	T_{OPR}	-40 to +105	°C
Storage temperature	T_{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V_F	$I_F = 20\text{mA}$	-	3.0	3.4	V
Reverse Current, (Per Dice)	I_R	$V_R = 5\text{V}$	-	-	10	μA
Dominant Wavelength	λ_D	$I_F = 20\text{mA}$	464	-	474	nm
Luminous Intensity	I_v	$I_F = 20\text{mA}$	45	-	90	mcd
Spectral Line Half-Bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$	-	20	-	nm



Opto Plus LED Corp.
0.30'' SMD Type LED Display
OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● **SB: BIN GRADE (Unit : mcd) 20mA**

Super Bright Blue	L	M	N
	45.0 – 60.0	60.1 – 75.0	75.1 – 90.0

● **SB: HUE GRADE (λD : nm)**

1	2	3
464.0 - 467.0	467.1 - 470.0	470.1 - 474.0

● **AVAILABLE BIN / HUE TABLE**

L1	L2	L3
M1	M2	M3
N1	N2	N3



Opto Plus LED Corp.

0.30'' SMD Type LED Display

OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● SB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

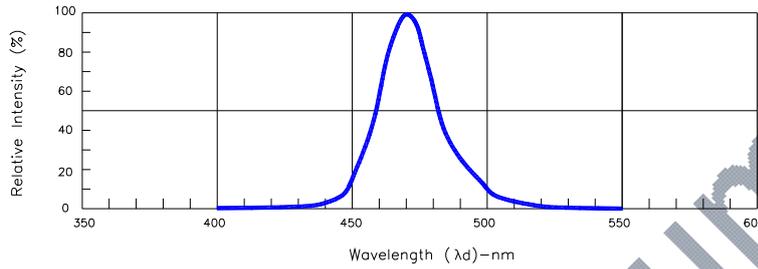


Fig.1-Relative Intensity VS. Wavelength

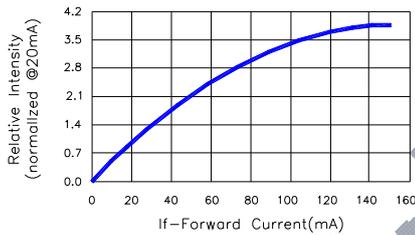


Fig.2-Relative Luminous Intensity vs. Forward Current

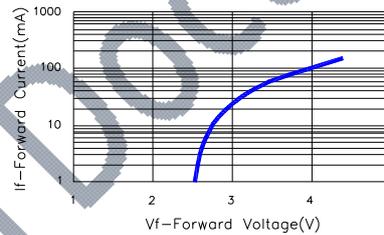


Fig.3-Forward Current vs. Forward Voltage

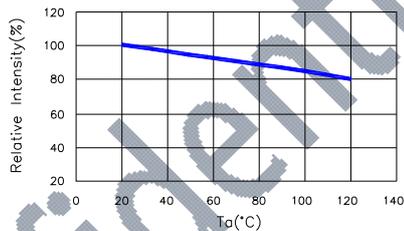


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

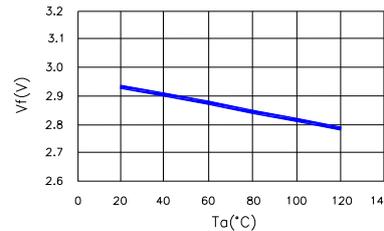


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

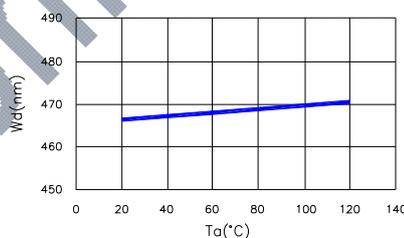


Fig.6-Dominant Wavelength(@20mA)
VS. Ambient Temperature

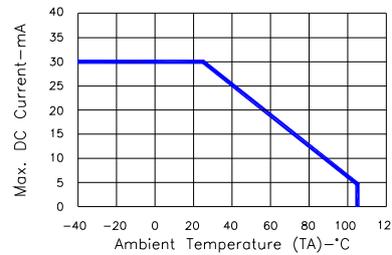


Fig.7-Max. Allowable DC Current
VS. Ambient Temperature



Opto Plus LED Corp.


0.30" SMD Type LED Display

OPS-D3050SB-ST-1.5 | OPS-D3051SB-ST-1.5

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

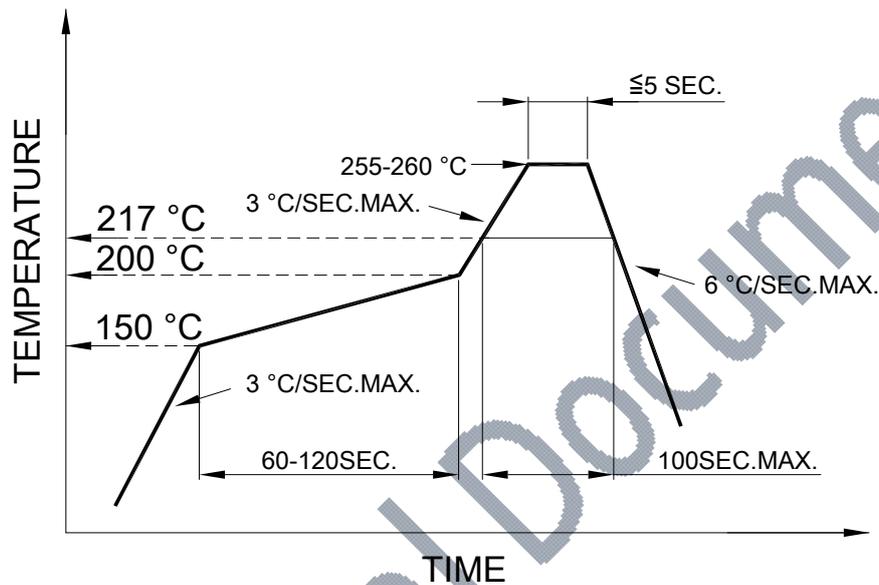

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.