



www.opledtw.com

Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-D56A0LA-STT(R)-1.0-G(B)W
OPS-D56A1LA-STT(R)-1.0-G(B)W

● **EDIT HISTORY**

Version A: Mar. 24, 2025

Preliminary Spec.

Confidential Document



www.opledtw.com

Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-D56A0LA-STT(R)-1.0-G(B)W

OPS-D56A1LA-STT(R)-1.0-G(B)W

● FEATURES

- 0.56 inch (14.22 mm) digit height.
- Low current operation.
- Excellent character appearance.
- Super thin SMD type.
- RoHS compliant, Pb Free.

● DESCRIPTION

The device are 0.56 inch (14.22 mm) height dual digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Amber LED chip which are made from AlGaInP

On a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE

PART NO.	DESCRIPTION
OPS-D56A0LA-STT-1.0-GW	Common Anode Gray face White segment Top mount
OPS-D56A1LA-STT-1.0-GW	Common Cathode Gray face White segment Top mount
OPS-D56A0LA-STT-1.0-BW	Common Anode Black face White segment Top mount
OPS-D56A1LA-STT-1.0-BW	Common Cathode Black face White segment Top mount
OPS-D56A0LA-STR-1.0-GW	Common Anode Gray face White segment Reverse mount
OPS-D56A1LA-STR-1.0-GW	Common Cathode Gray face White segment Reverse mount
OPS-D56A0LA-STR-1.0-BW	Common Anode Black face White segment Reverse mount
OPS-D56A1LA-STR-1.0-BW	Common Cathode Black face White segment Reverse mount

RoHS Compliance



Pb Free.



Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice



www.opledtw.com

Opto Plus LED Corp.



0.56" SMD Type LED Display

OPS-D56A0LA-STT(R)-1.0-G(B)W


OPS-D56A1LA-STT(R)-1.0-G(B)W

● TYPICAL INTERNAL EQUIVALENT CIRCUIT


Turn On Color

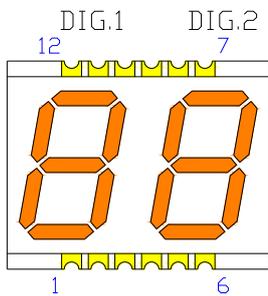


Recommended
Top Mount
Soldering Pattern

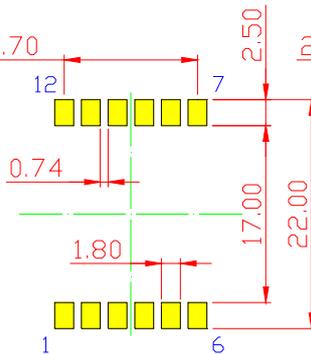

Recommended
Reverse Mount
Soldering Pattern

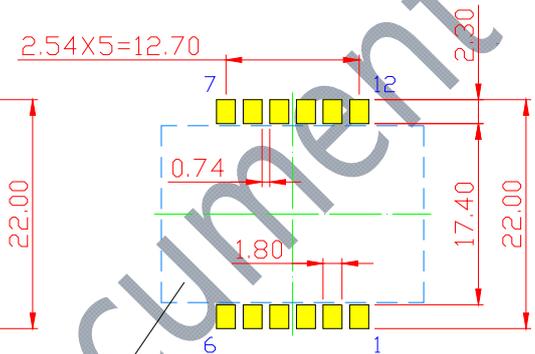


Reflector
(Mounting Hole)

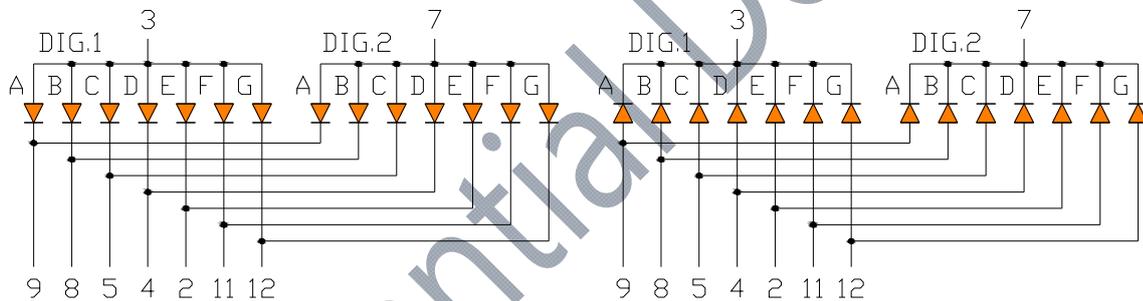

PIN1,6,10 No Connection
OPS-D56A0LA-STT(R)-1.0-G(B)W
(Common Anode)

PIN1,6,10 No Connection
OPS-D56A1LA-STT(R)-1.0-G(B)W
(Common Cathode)

※EMITTED COLOR : SUPER BRIGHT AMBER

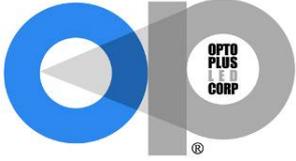

www.opledtw.com

Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-D56A0LA-STT(R)-1.0-G(B)W
OPS-D56A1LA-STT(R)-1.0-G(B)W

● **PRODUCT APPEARANCE**

The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-D56A0LA-STT-1.0-GW	Common Anode Gray face White segment Top mount
OPS-D56A1LA-STT-1.0-GW	Common Cathode Gray face White segment Top mount
OPS-D56A0LA-STT-1.0-BW	Common Anode Black face White segment Top mount
OPS-D56A1LA-STT-1.0-BW	Common Cathode Black face White segment Top mount
OPS-D56A0LA-STR-1.0-GW	Common Anode Gray face White segment Reverse mount
OPS-D56A1LA-STR-1.0-GW	Common Cathode Gray face White segment Reverse mount
OPS-D56A0LA-STR-1.0-BW	Common Anode Black face White segment Reverse mount
OPS-D56A1LA-STR-1.0-BW	Common Cathode Black face White segment Reverse mount



www.opledtw.com

Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-D56A0LA-STT(R)-1.0-G(B)W
OPS-D56A1LA-STT(R)-1.0-G(B)W

● **LA: SUPER BRIGHT AMBER (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	48	mW
Continuous forward current	I _{AF}	20	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	40	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V _F	I _F = 20mA	-	2.0	2.4	V
Reverse Current, (Per Dice)	I _R	V _R = 5V	-	-	10	µA
Peak Wavelength	λ _P	I _F = 20mA	-	612	-	nm
Dominant Wavelength	λ _D	I _F = 20mA	601	-	613	nm
Luminous Intensity	I _v	I _F = 20mA	7	-	30	mcd
Spectral Line Half-Bandwidth	Δλ	I _F = 20mA	-	20	-	nm



www.opledtw.com

Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-D56A0LA-STT(R)-1.0-G(B)W
OPS-D56A1LA-STT(R)-1.0-G(B)W

● **LA: BIN GRADE (Unit : mcd) 20mA**

Super Bright Amber	G	H	I
	7.0 - 14.0	14.1 - 22.0	22.1 - 30.0

● **LA: HUE GRADE (λ_D : nm)**

1	2	3
601.0 – 605.0	605.1 – 609.0	609.1 – 613.0

● **AVAILABLE BIN / HUE TABLE**

G1	H1	I1
G2	H2	I2
G3	H3	I3



www.opledtw.com

Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-D56A0LA-STT(R)-1.0-G(B)W

OPS-D56A1LA-STT(R)-1.0-G(B)W

● LA: SUPER BRIGHT AMBER (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

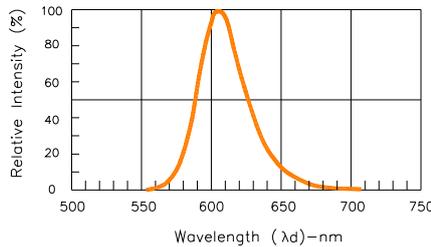


Fig.1-Relative Intensity VS. Wavelength

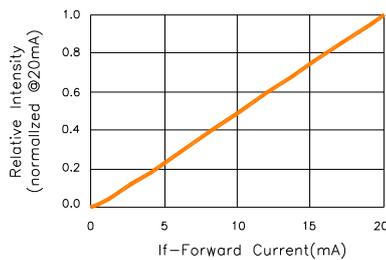


Fig.2-Relative Luminous Intensity vs. Forward Current

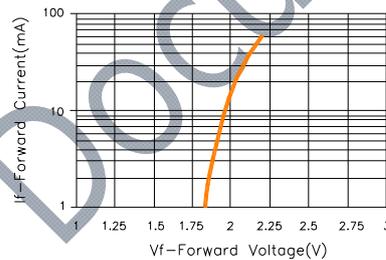


Fig.3-Forward Current vs. Forward Voltage

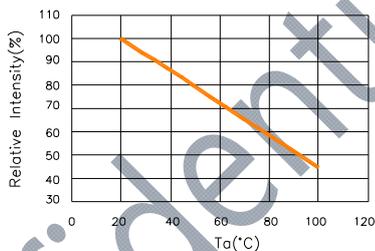


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

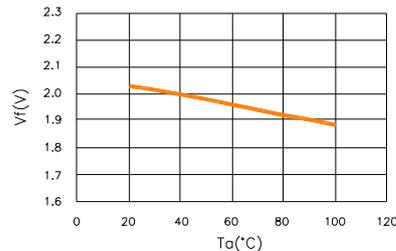


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

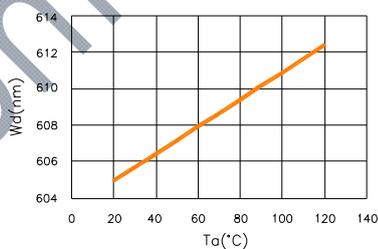


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature

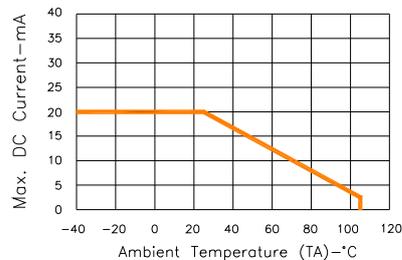


Fig.7-Max. Allowable DC Current VS. Ambient Temperature



www.opledtw.com

Opto Plus LED Corp.

0.56" SMD Type LED Display


OPS-D56A0LA-STT(R)-1.0-G(B)W

OPS-D56A1LA-STT(R)-1.0-G(B)W

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

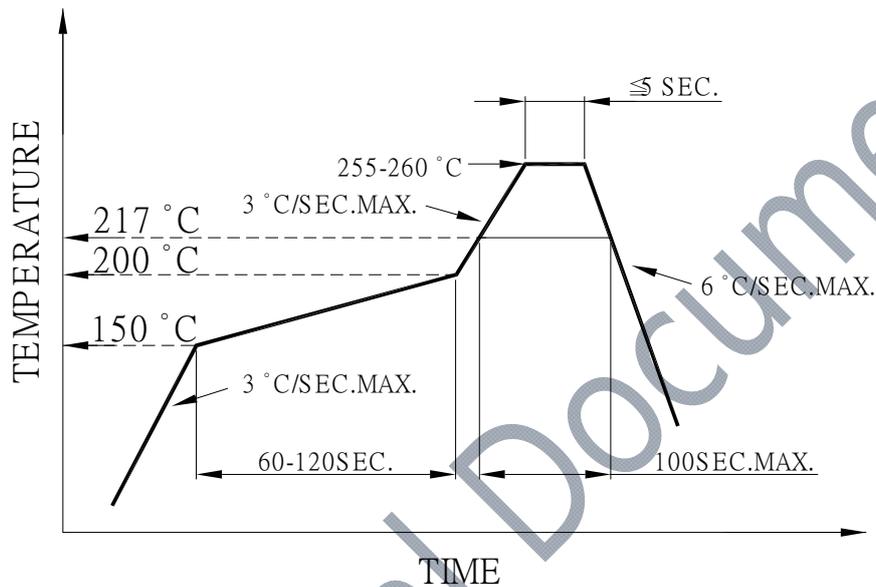

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.



www.opledtw.com


Opto Plus LED Corp.

0.56" SMD Type LED Display


OPS-D56A0LA-STT(R)-1.0-G(B)W

OPS-D56A1LA-STT(R)-1.0-G(B)W

● REEL DIMENSIONS

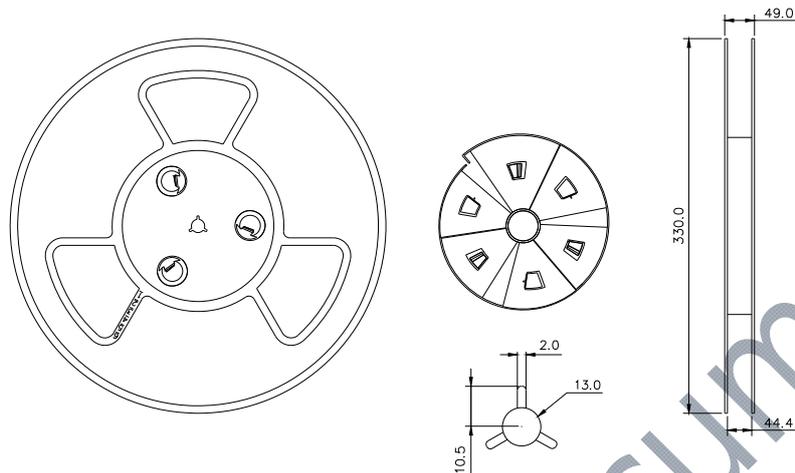

● PACKING & LABEL SPECIFICATIONS

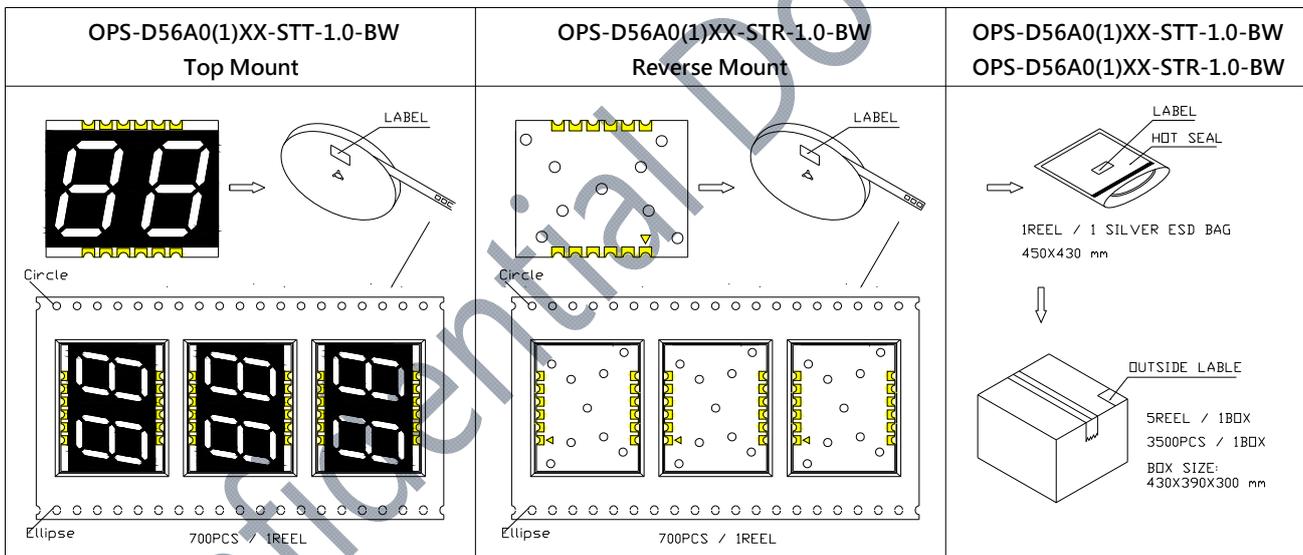

● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)