



Opto Plus LED Corp.
0.39" SMD Type LED Display
OPS-Q3914LR | OPS-Q3915LR

● **EDIT HISTORY**

Version A: Nov. 03, 2020

Preliminary Spec.

Version B: Jul. 04, 2022

1. Modify electrical optical characteristics.
2. Modify curve graph.



Opto Plus LED Corp.
0.39” SMD Type LED Display
OPS-Q3914LR | OPS-Q3915LR

www.opledtw.com

● **FEATURES**

- 0.39 inch (10.0 mm) digit height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

● **DESCRIPTION**

The device are 0.39 inch (10.0mm) height quadruple digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Red LED chip which are made from AlGaInP on a Transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● **DEVICE**

| PART NO. | DESCRIPTION |
|----------------|---|
| OPS-Q3914LR-GW | Common Anode Gray face White segment |
| OPS-Q3915LR-GW | Common Cathode Gray face White segment |
| OPS-Q3914LR-BW | Common Anode Black face White segment |
| OPS-Q3915LR-BW | Common Cathode Black face White segment |


RoHS Compliance



Pb Free.



● **MECHANICAL DIMENSIONS**

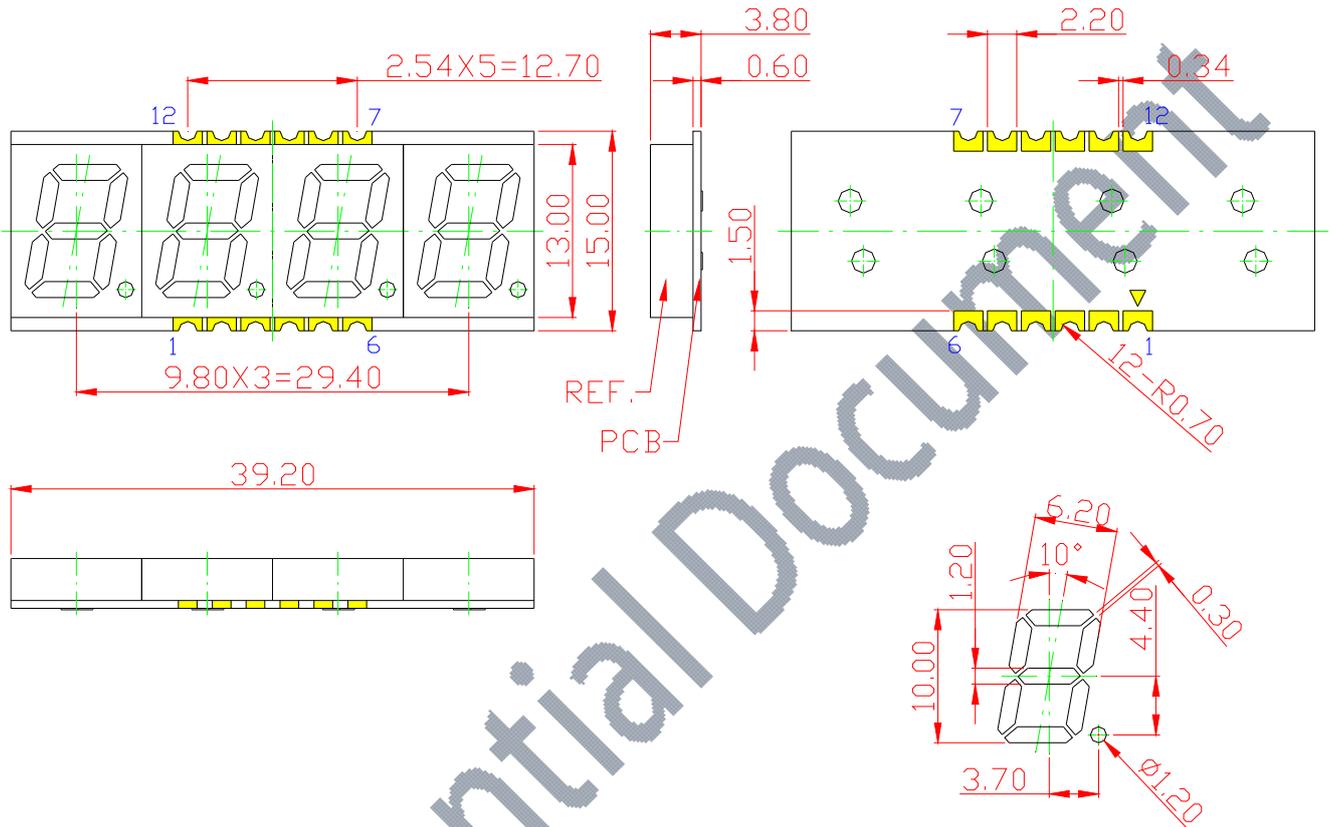

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.






Opto Plus LED Corp.

0.39" SMD Type LED Display

OPS-Q3914LR | OPS-Q3915LR

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

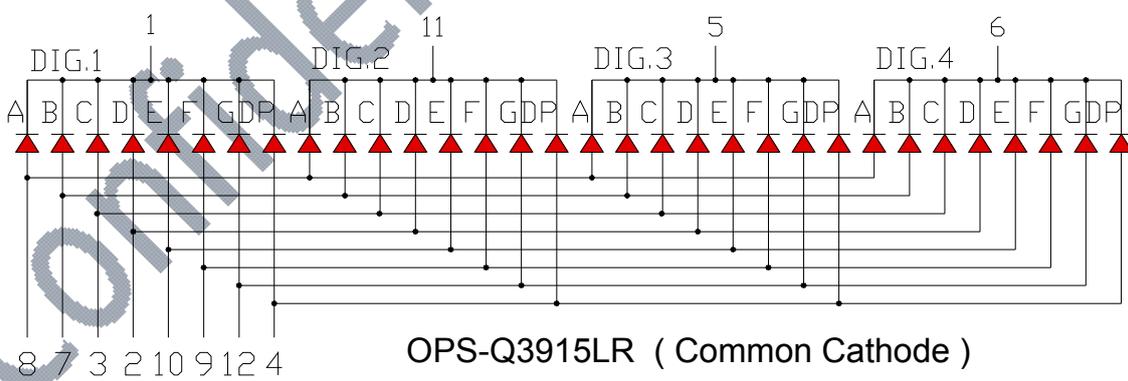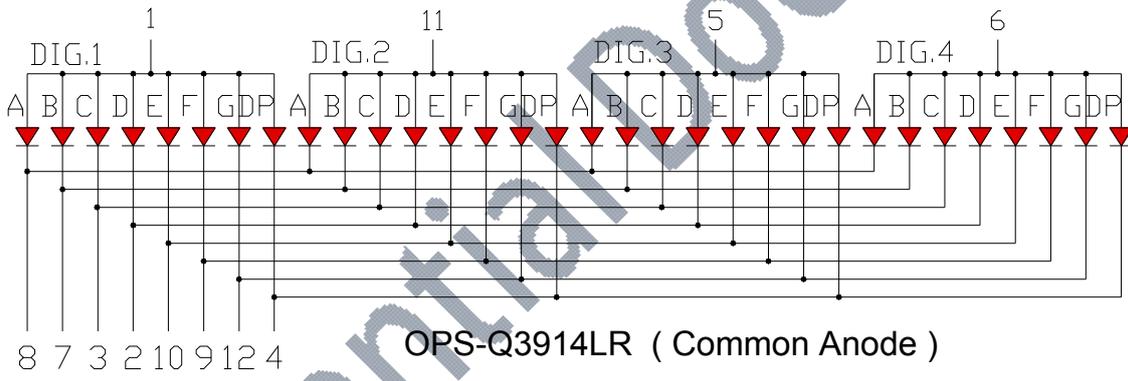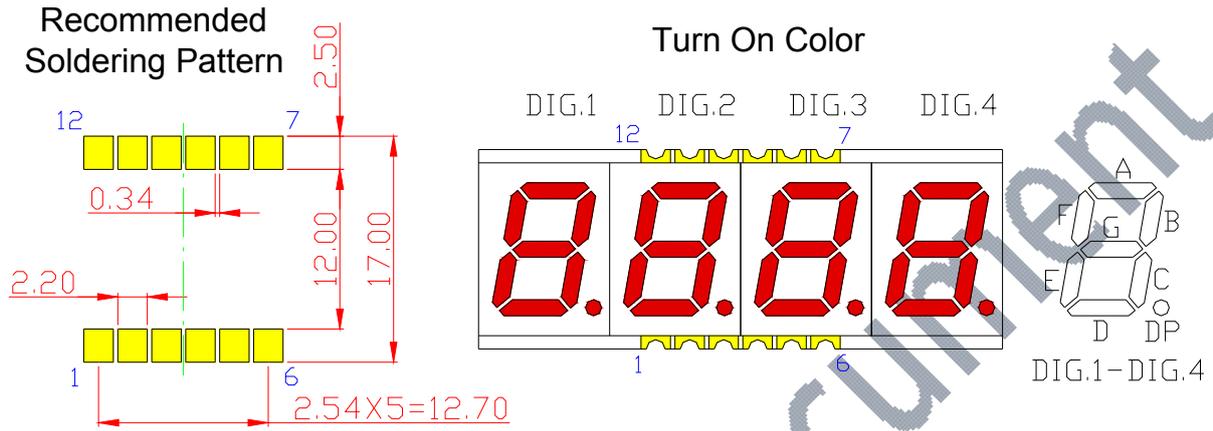

※EMITTED COLOR : SUPER RED



Opto Plus LED Corp.

0.39" SMD Type LED Display

OPS-Q3914LR | OPS-Q3915LR

● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

| -GW | -BW |
|---|--|
| | |
| ※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White | ※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White |

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

| PART NO. | DESCRIPTION |
|----------------|---|
| OPS-Q3914LR-GW | Common Anode Gray face White segment |
| OPS-Q3915LR-GW | Common Cathode Gray face White segment |
| OPS-Q3914LR-BW | Common Anode Black face White segment |
| OPS-Q3915LR-BW | Common Cathode Black face White segment |



Opto Plus LED Corp. 0.39'' SMD Type LED Display OPS-Q3914LR | OPS-Q3915LR

● LR: SUPER RED (AlGaInP/GaAs)

ABSOLUTE MAXIMUM RATING AT Ta=25°C

| Parameter | Symbol | Maximum Rating | Unit |
|--------------------------------------|-----------|----------------|------|
| Power dissipation | P_{AD} | 48 | mW |
| Continuous forward current | I_{AF} | 20 | mA |
| Peak current (duty cycle 1/10, 1kHz) | I_{PF} | 40 | mA |
| Reverse voltage | V_R | 5 | V |
| Operating temperature | T_{OPR} | -40 to +85 | °C |
| Storage temperature | T_{STG} | -40 to +85 | °C |

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

| Characteristic | Symbol | Condition | Min. | Type. | Max. | Unit |
|------------------------------|-----------------|---------------------|------|-------|------|---------------|
| Forward Voltage, (Per Dice) | V_F | $I_F = 20\text{mA}$ | - | 2.1 | 2.4 | V |
| Reverse Current, (Per Dice) | I_R | $V_R = 5\text{V}$ | - | - | 10 | μA |
| Peak Wavelength | λ_P | $I_F = 20\text{mA}$ | - | 650 | - | nm |
| Dominant Wavelength | λ_D | $I_F = 20\text{mA}$ | 635 | - | 648 | nm |
| Luminous Intensity | I_V | $I_F = 20\text{mA}$ | 5 | 12.5 | 20 | mcd |
| Spectral Line Half-Bandwidth | $\Delta\lambda$ | $I_F = 20\text{mA}$ | - | 20 | - | nm |



Opto Plus LED Corp.
0.39" SMD Type LED Display
OPS-Q3914LR | OPS-Q3915LR

- LR: BIN GRADE (Unit : mcd) 20mA

| | | | |
|------------------|------------|-------------|-------------|
| Super Red | I | J | K |
| | 5.0 - 10.0 | 10.1 - 15.0 | 15.1 - 20.0 |

- LR: HUE GRADE (λ_D : nm)

| | | |
|---------------|---------------|---------------|
| 1 | 2 | 3 |
| 635.0 – 640.0 | 640.1 – 644.0 | 644.1 – 648.0 |

- AVAILABLE BIN / HUE TABLE

| | | |
|----|----|----|
| I1 | J1 | K1 |
| I2 | J2 | K2 |
| I3 | J3 | K3 |



Opto Plus LED Corp.

0.39" SMD Type LED Display

OPS-Q3914LR | OPS-Q3915LR

● LR: SUPER RED (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

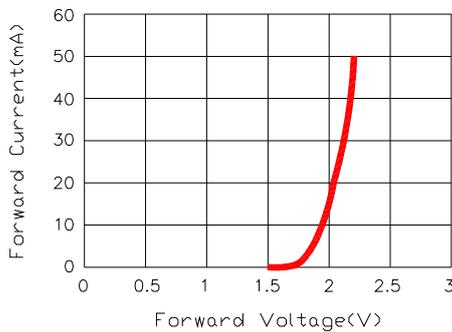


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

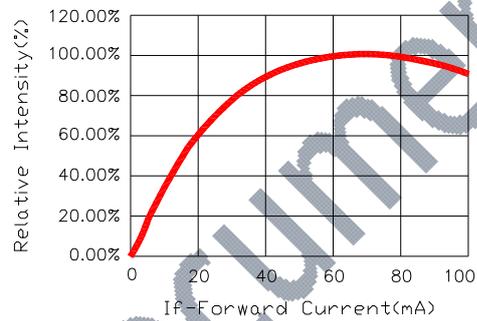


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

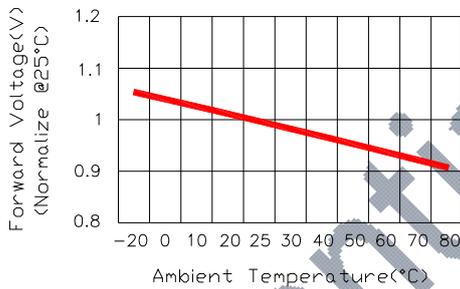


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

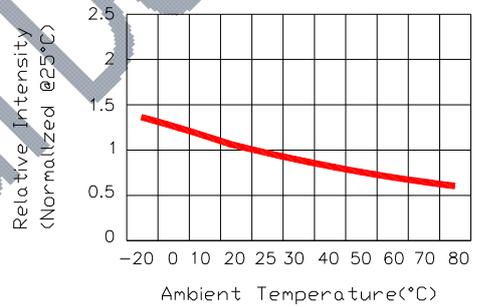


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

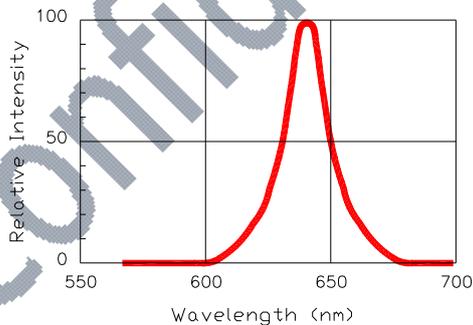


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

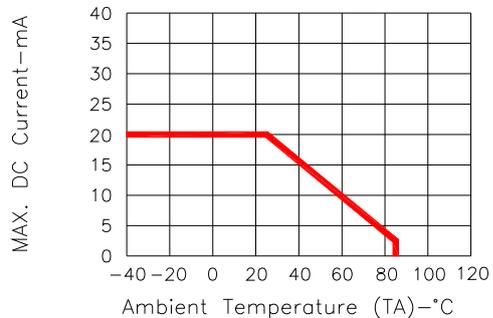


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE



Opto Plus LED Corp.


0.39" SMD Type LED Display

OPS-Q3914LR | OPS-Q3915LR

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

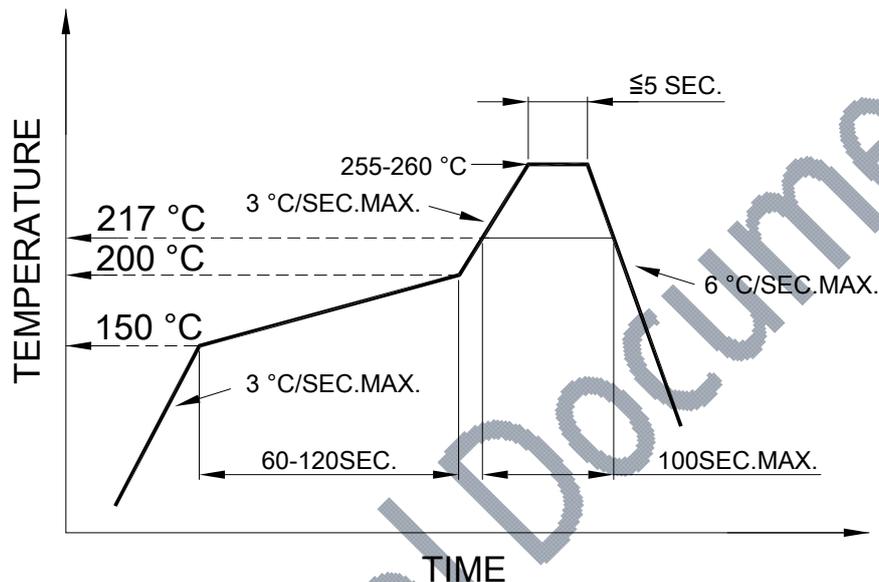

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




Opto Plus LED Corp.


0.39" SMD Type LED Display

OPS-Q3914LR | OPS-Q3915LR

● REEL DIMENSIONS

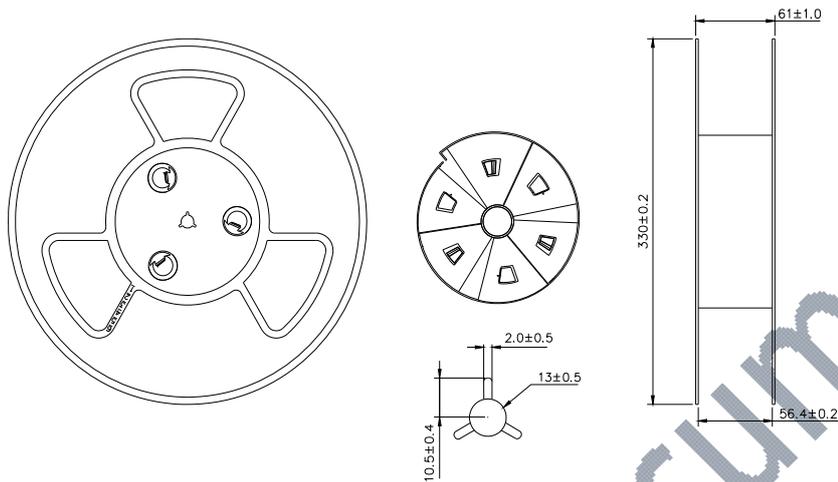

● PACKING & LABEL SPECIFICATIONS

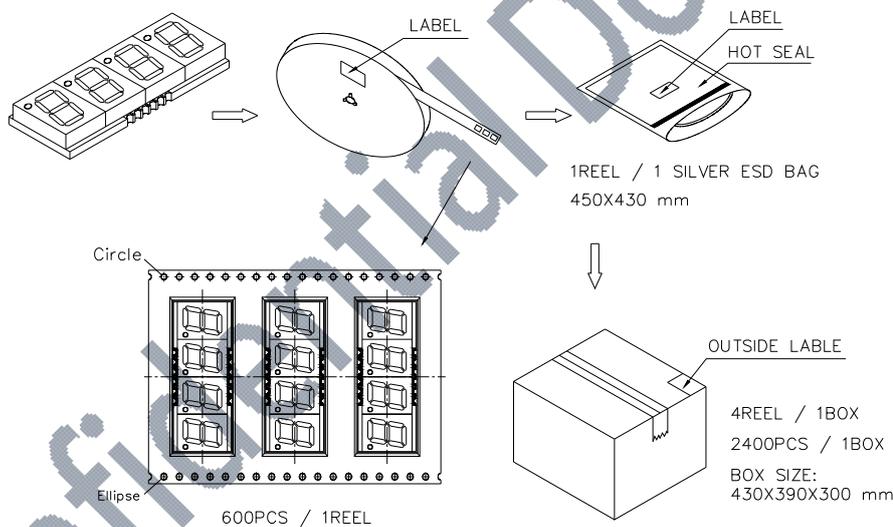

● STORAGE CONDITION

In factory original sealed bag package

| TEMPERATURE CONDITION | HUMIDITY CONDITION |
|-----------------------|--------------------|
| 5°C ~ 30°C | Below 60%RH |

After opened and not in factory original sealed bag package

| TEMPERATURE CONDITION | HUMDITY CONDITION | STORAGE TIME |
|-----------------------|-------------------|----------------------------------|
| 5°C ~ 30°C | Below 60%RH | Within 4 weeks (MSL as level 2a) |



www.opledtw.com

Opto Plus LED Corp.
0.39" SMD Type LED Display
OPS-Q3914LR | OPS-Q3915LR

Confidential Document