

www.opledtw.com


Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-S3050SYG-ST-1.5
OPS-S3051SYG-ST-1.5

● **EDIT HISTORY**

Version A: Jun. 15, 2024

Preliminary Spec.

Confidential Document

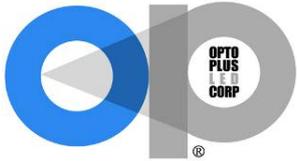

www.opledtw.com

Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-S3050SYG-ST-1.5

OPS-S3051SYG-ST-1.5

● FEATURES

- 0.30 inch (7.62 mm) Digit Height.
- Low current operation.
- Excellent character appearance.
- Super thin SMD type.
- RoHS compliant, Pb Free.

● DESCRIPTION

The device are 0.30 inch (7.62 mm) height single digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Yellow Green LED chip which are made from AlGaInP on a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE


PART NO.	DESCRIPTION
OPS-S3050SYG-ST-1.5-GW	Common Anode Gray face White segment
OPS-S3051SYG-ST-1.5-GW	Common Cathode Gray face White segment
OPS-S3050SYG-ST-1.5-BW	Common Anode Black face White segment
OPS-S3051SYG-ST-1.5-BW	Common Cathode Black face White segment

RoHS Compliance



Pb Free.



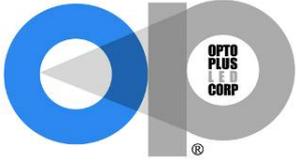

www.opledtw.com


Opto Plus LED Corp.

0.30" SMD Type LED Display


OPS-S3050SYG-ST-1.5

OPS-S3051SYG-ST-1.5

● MECHANICAL DIMENSIONS

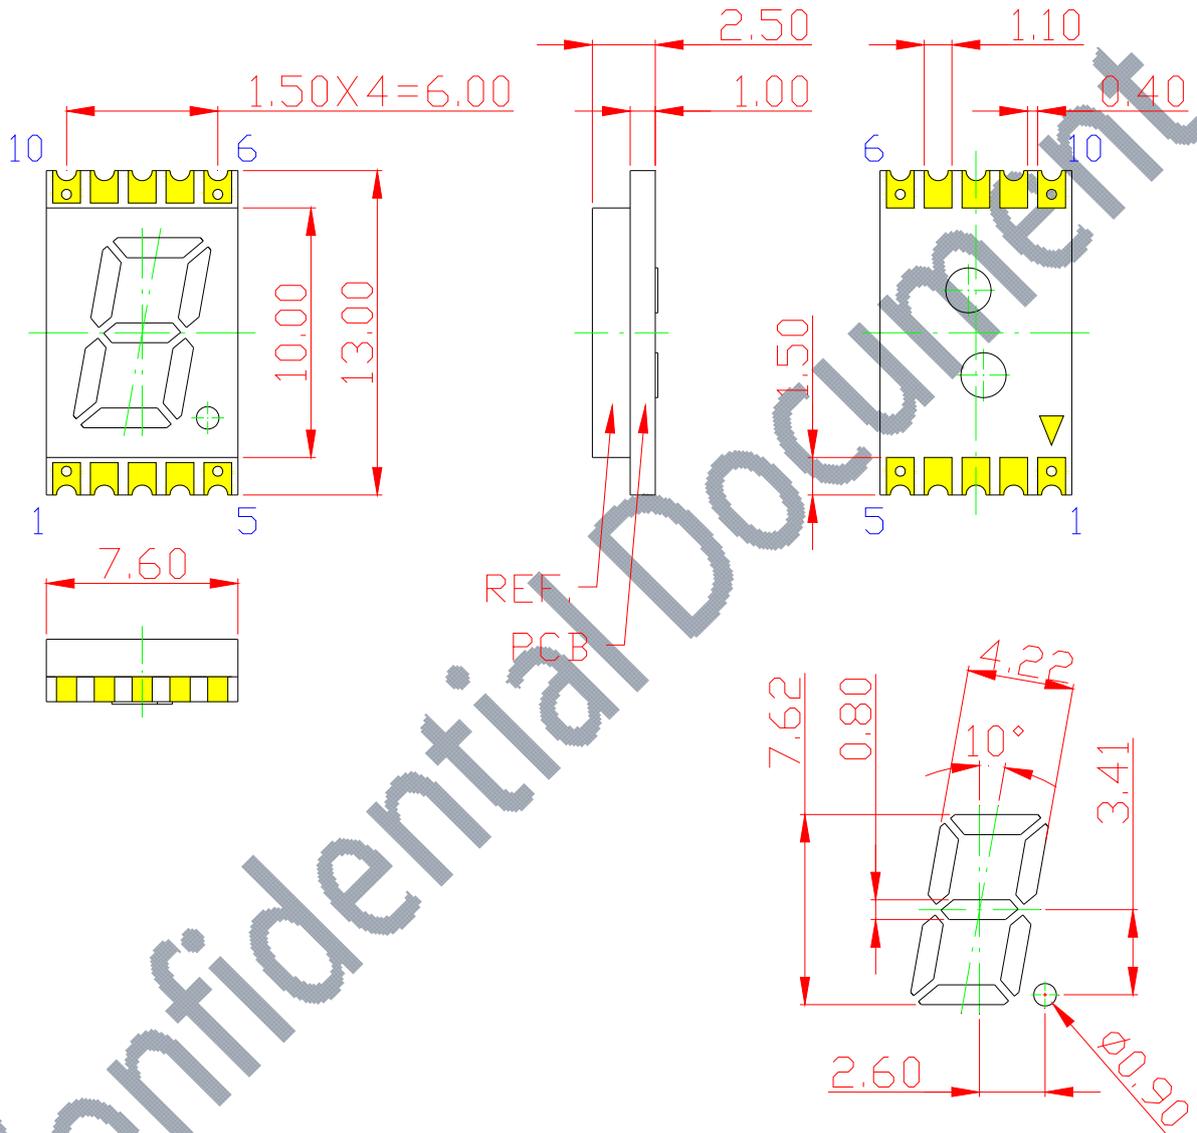

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

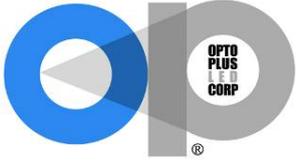

www.opledtw.com

Opto Plus LED Corp.

0.30" SMD Type LED Display




OPS-S3050SYG-ST-1.5

OPS-S3051SYG-ST-1.5


● TYPICAL INTERNAL EQUIVALENT CIRCUIT

Recommended
Reverse Mount
Soldering Pattern


Turn On Color

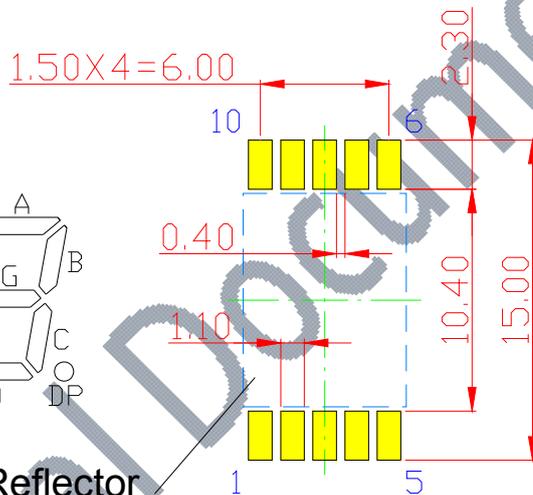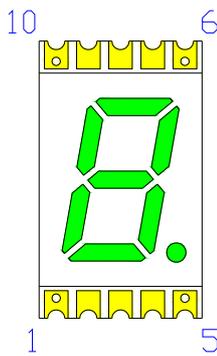

Reflector
(Mounting Hole)

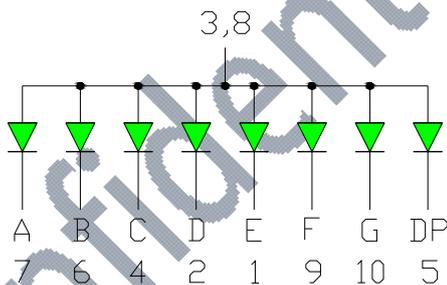


OPS-S3050SYG-ST-1.5
(Common Anode)

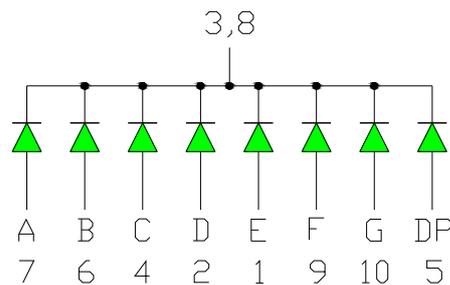

OPS-S3051SYG-ST-1.5
(Common Cathode)

※EMITTED COLOR : SUPER BRIGHT YELLOW GREEN

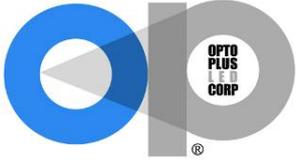

www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-S3050SYG-ST-1.5
OPS-S3051SYG-ST-1.5

● **PRODUCT APPEARANCE**


The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-S3050SYG-ST-1.5-GW	Common Anode Gray face White segment
OPS-S3051SYG-ST-1.5-GW	Common Cathode Gray face White segment
OPS-S3050SYG-ST-1.5-BW	Common Anode Black face White segment
OPS-S3051SYG-ST-1.5-BW	Common Cathode Black face White segment

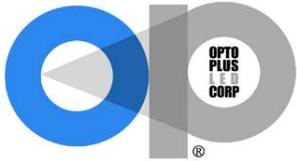

www.opledtw.com

Opto Plus LED Corp.
0.30'' SMD Type LED Display
OPS-S3050SYG-ST-1.5
OPS-S3051SYG-ST-1.5


● **SYG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	48	mW
Continuous forward current	I _{AF}	20	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	40	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V _F	I _F = 20mA	-	2.1	2.4	V
Reverse Current, (Per Dice)	I _R	V _R = 5V	-	-	10	µA
Peak Wavelength	λ _P	I _F = 20mA	-	573	-	nm
Dominant Wavelength	λ _D	I _F = 20mA	567	-	576	nm
Luminous Intensity	I _V	I _F = 20mA	3	-	15	mcd
Spectral Line Half-Bandwidth	Δλ	I _F = 20mA	-	20	-	nm

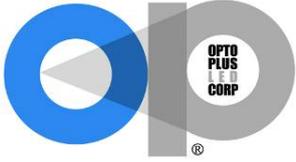

www.opledtw.com

Opto Plus LED Corp.
0.30'' SMD Type LED Display
OPS-S3050SYG-ST-1.5
OPS-S3051SYG-ST-1.5

● SYG: BIN GRADE (Unit :mcd) 20mA


Super Bright Yellow Green	F	G	H
	3.0 - 7.0	7.1 - 11.0	11.1 - 15.0

● SYG: HUE GRADE (λD : nm)

1	2	3
567.0 - 570.0	570.1 - 573.0	573.1 - 576.0

● AVAILABLE BIN / HUE TABLE

F1	F2	F3
G1	G2	G3
H1	H2	H3

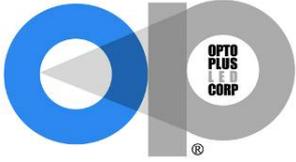

www.opledtw.com

Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-S3050SYG-ST-1.5

OPS-S3051SYG-ST-1.5

● SYG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

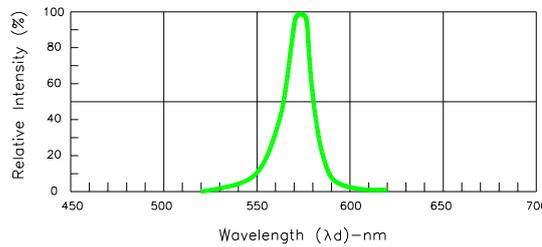


Fig.1-Relative Intensity VS. Wavelength

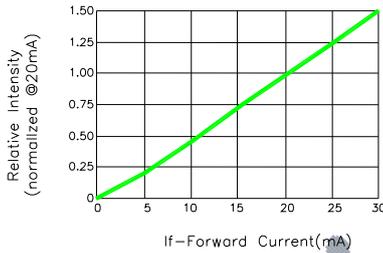


Fig.2-Relative Luminous Intensity vs. Forward Current

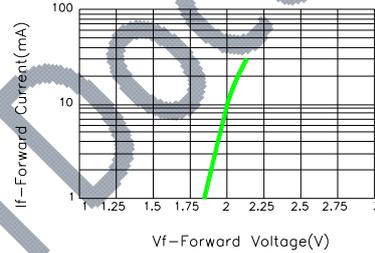


Fig.3-Forward Current vs. Forward Voltage

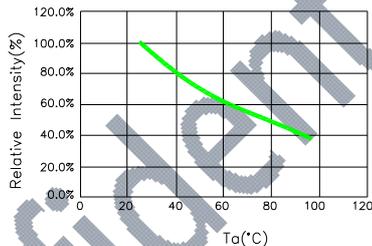


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

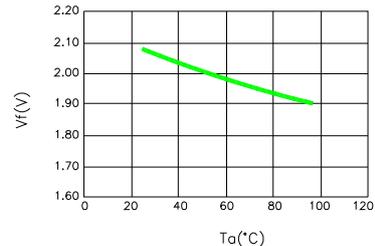


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

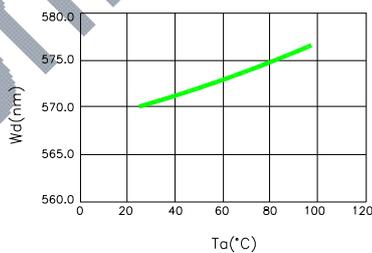


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature


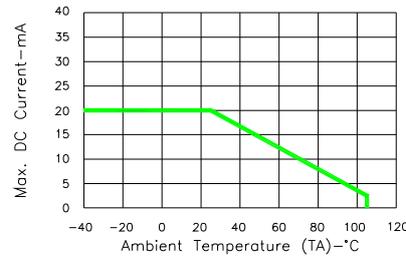


Fig.7-Max. Allowable DC Current VS. Ambient Temperature

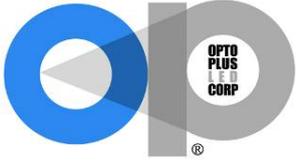

www.opledtw.com

Opto Plus LED Corp.

0.30" SMD Type LED Display


OPS-S3050SYG-ST-1.5

OPS-S3051SYG-ST-1.5

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

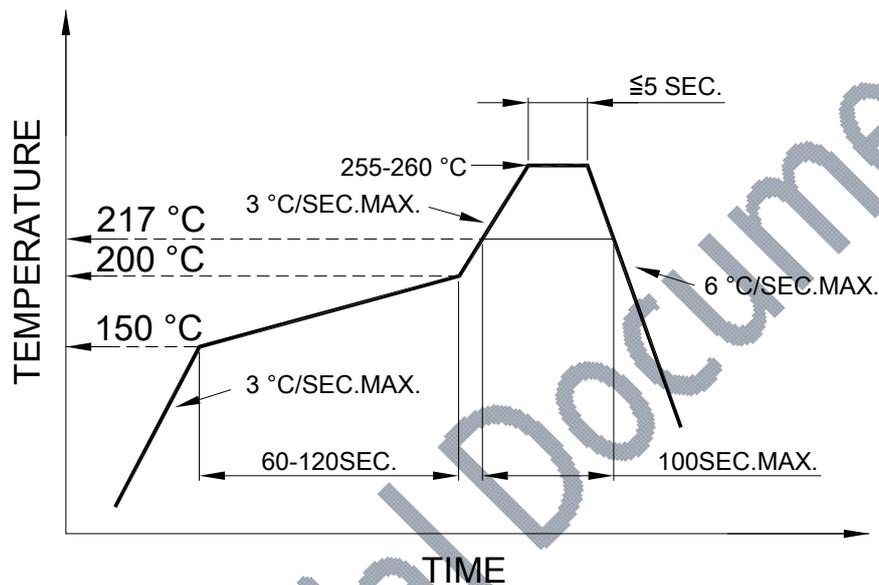

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.