



www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-T3050SB-STT(R)-1.5-G(B)W
OPS-T3051SB-STT(R)-1.5-G(B)W

● **EDIT HISTORY**

Version A: Mar. 24, 2025

Preliminary Spec.

Confidential Document



Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-T3050SB-STT(R)-1.5-G(B)W
OPS-T3051SB-STT(R)-1.5-G(B)W

● **FEATURES**

- 0.30 inch (7.62 mm) Digit Height.
- Low current operation.
- Excellent character appearance.
- Super thin SMD type.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The device are 0.30 inch (7.62 mm) height triple digits 7-segment display.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Blue LED chip which are made from InGaN

On a transparent GaN, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● **DEVICE**

PART NO.	DESCRIPTION
OPS-T3050SB-STT-1.5-GW	Common Anode Gray face White segment Top mount
OPS-T3051SB-STT-1.5-GW	Common Cathode Gray face White segment Top mount
OPS-T3050SB-STT-1.5-BW	Common Anode Black face White segment Top mount
OPS-T3051SB-STT-1.5-BW	Common Cathode Black face White segment Top mount
OPS-T3050SB-STR-1.5-GW	Common Anode Gray face White segment Reverse mount
OPS-T3051SB-STR-1.5-GW	Common Cathode Gray face White segment Reverse mount
OPS-T3050SB-STR-1.5-BW	Common Anode Black face White segment Reverse mount
OPS-T3051SB-STR-1.5-BW	Common Cathode Black face White segment Reverse mount

RoHS Compliance




Pb Free.





Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-T3050SB-STT(R)-1.5-G(B)W
OPS-T3051SB-STT(R)-1.5-G(B)W

● **MECHANICAL DIMENSIONS**

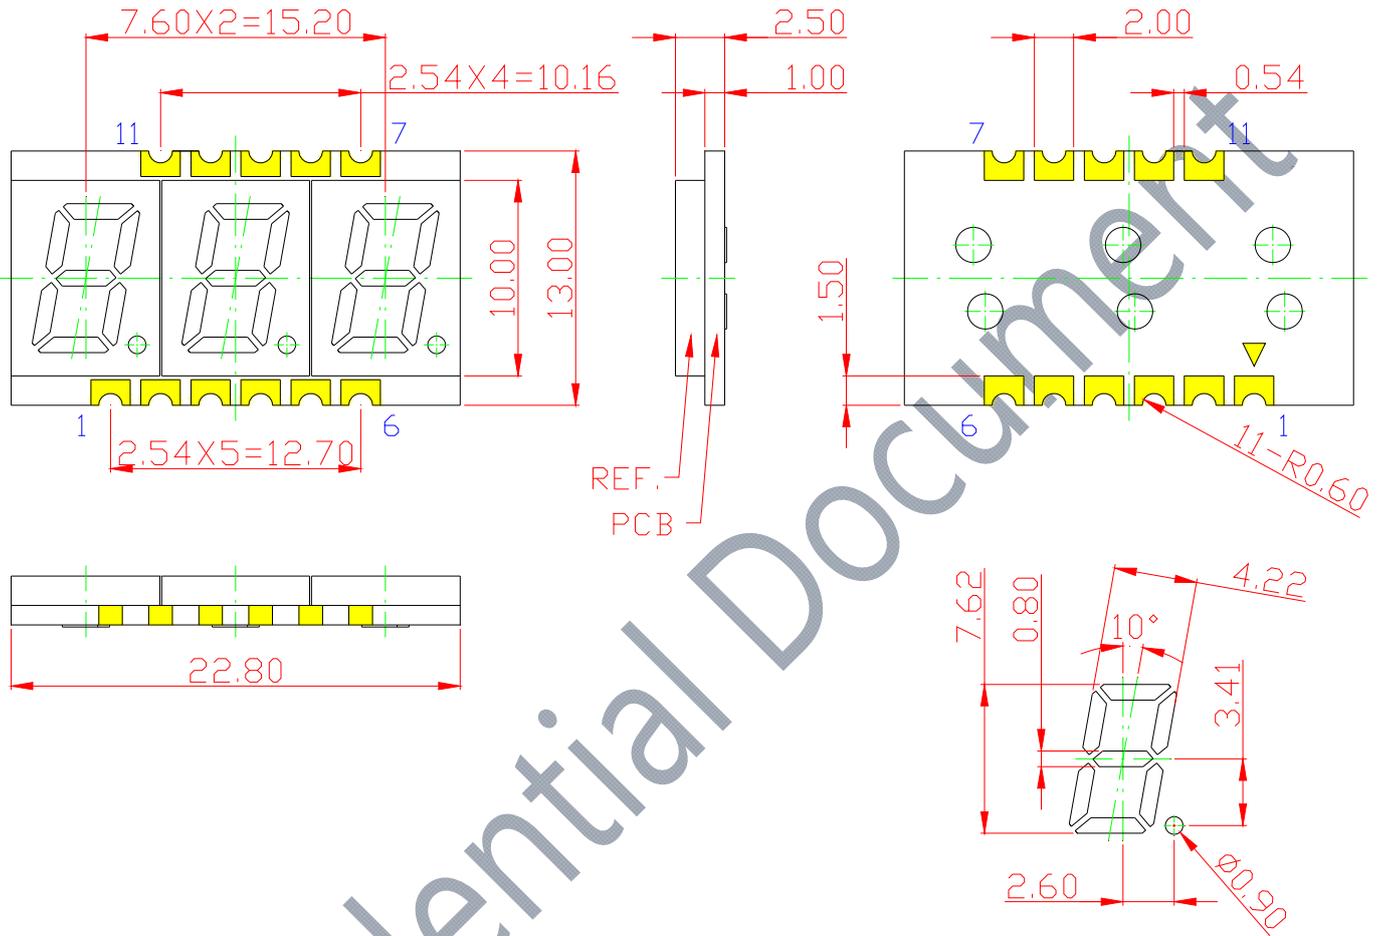

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.




Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-T3050SB-STT(R)-1.5-G(B)W

OPS-T3051SB-STT(R)-1.5-G(B)W

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

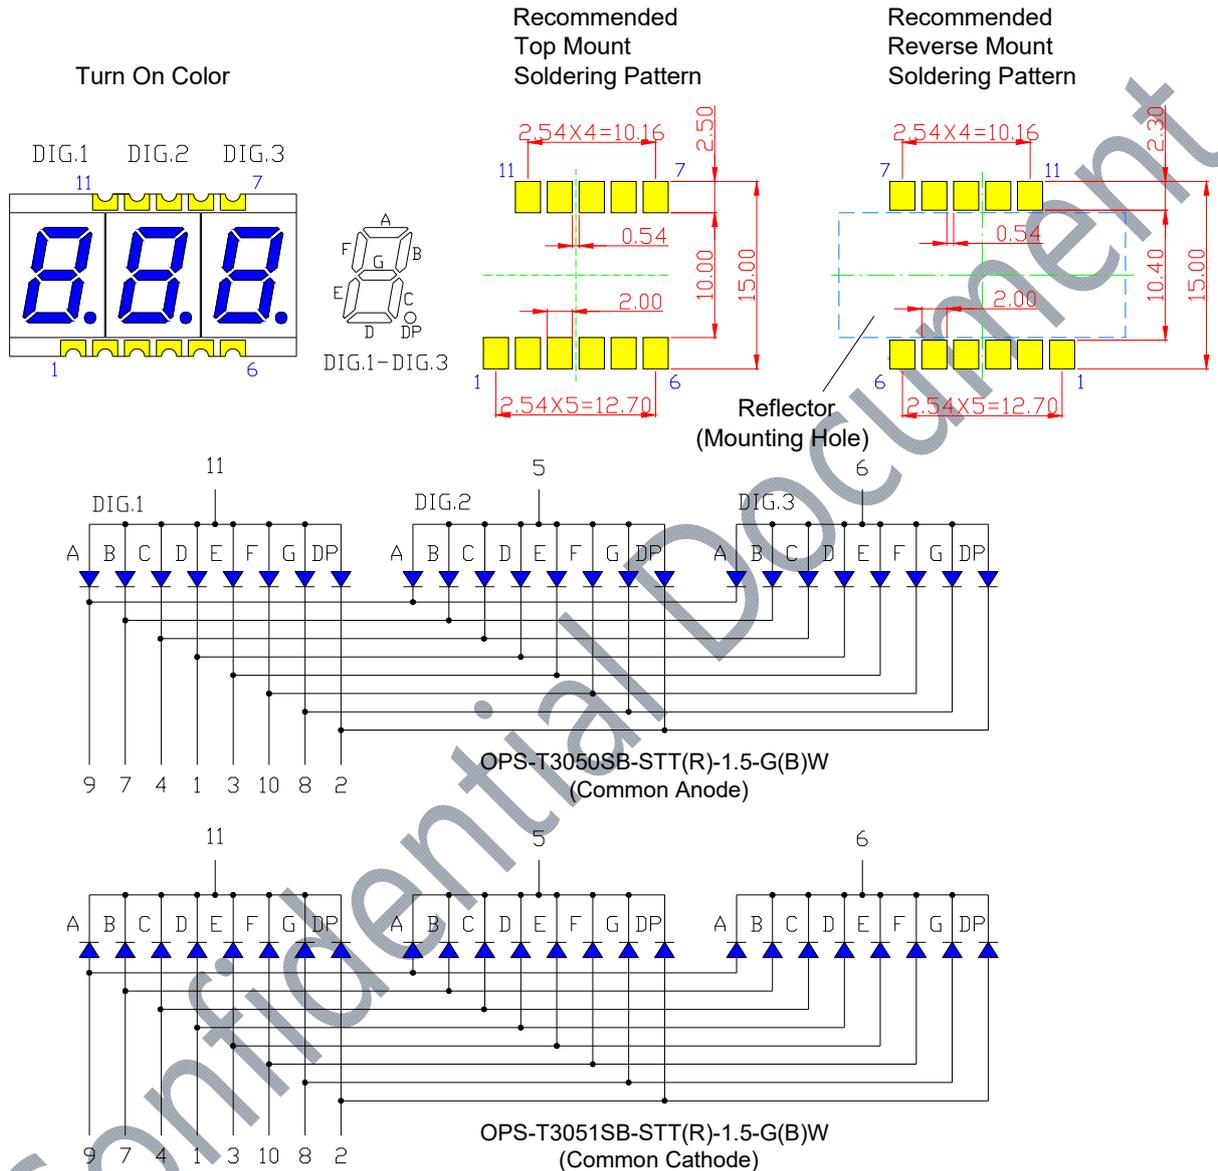


※EMITTED COLOR : SUPER BRIGHT BLUE



Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-T3050SB-STT(R)-1.5-G(B)W
OPS-T3051SB-STT(R)-1.5-G(B)W

● **PRODUCT APPEARANCE**

The most common reflector color and segment color are show in below diagram.

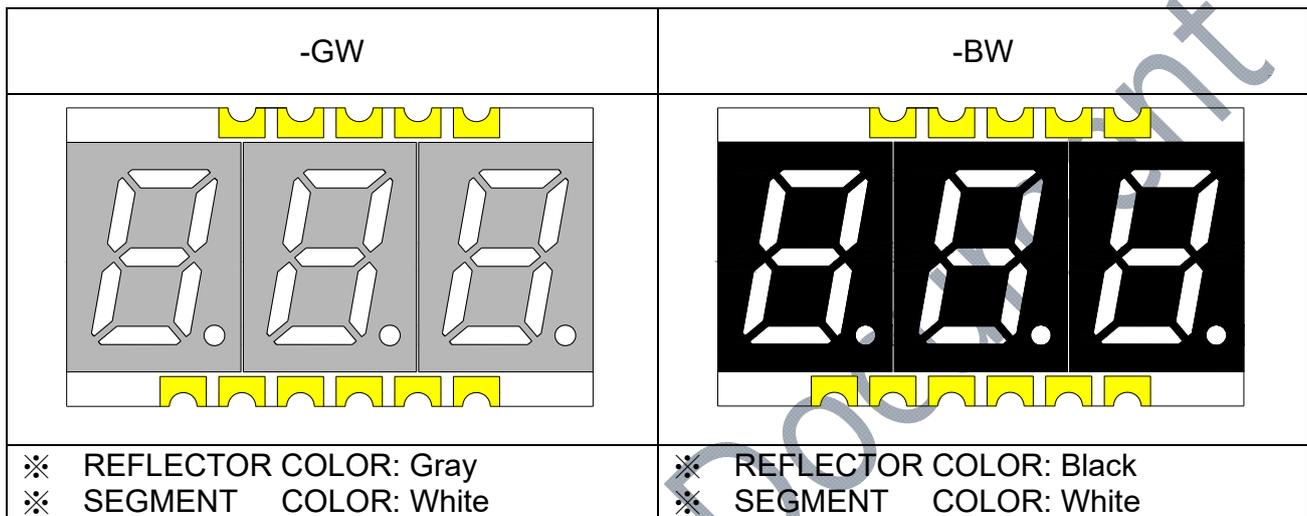

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-T3050SB-STT-1.5-GW	Common Anode Gray face White segment Top mount
OPS-T3051SB-STT-1.5-GW	Common Cathode Gray face White segment Top mount
OPS-T3050SB-STT-1.5-BW	Common Anode Black face White segment Top mount
OPS-T3051SB-STT-1.5-BW	Common Cathode Black face White segment Top mount
OPS-T3050SB-STR-1.5-GW	Common Anode Gray face White segment Reverse mount
OPS-T3051SB-STR-1.5-GW	Common Cathode Gray face White segment Reverse mount
OPS-T3050SB-STR-1.5-BW	Common Anode Black face White segment Reverse mount
OPS-T3051SB-STR-1.5-BW	Common Cathode Black face White segment Reverse mount



Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-T3050SB-STT(R)-1.5-G(B)W
OPS-T3051SB-STT(R)-1.5-G(B)W

● **SB: SUPER BRIGHT BLUE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	90	mW
Continuous forward current	I _{AF}	30	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	60	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V _F	I _F = 20mA	-	3.0	3.4	V
Reverse Current, (Per Dice)	I _R	V _R = 5V	-	-	10	μA
Dominant Wavelength	λ _D	I _F = 20mA	464	-	474	nm
Luminous Intensity	I _v	I _F = 20mA	45	-	90	mcd
Spectral Line Half-Bandwidth	Δλ	I _F = 20mA	-	20	-	nm



www.opledtw.com

Opto Plus LED Corp.
0.30” SMD Type LED Display
OPS-T3050SB-STT(R)-1.5-G(B)W
OPS-T3051SB-STT(R)-1.5-G(B)W

● **SB: BIN GRADE (Unit : mcd) 20mA**

	L	M	N
Super Bright Blue	45.0 – 60.0	60.1 – 75.0	75.1 – 90.0

● **SB: HUE GRADE (λD : nm)**

1	2	3
464.0 - 467.0	467.1 - 470.0	470.1 - 474.0

● **AVAILABLE BIN / HUE TABLE**

L1	L2	L3
M1	M2	M3
N1	N2	N3



Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-T3050SB-STT(R)-1.5-G(B)W

OPS-T3051SB-STT(R)-1.5-G(B)W

● SB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

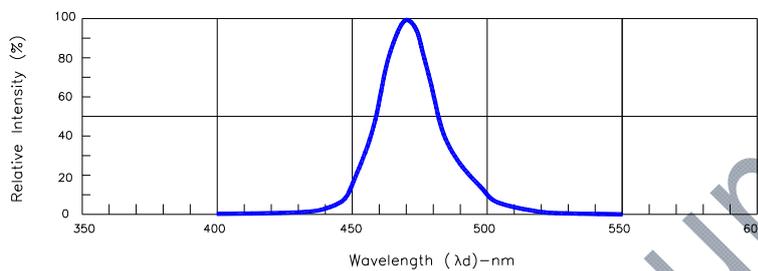


Fig.1-Relative Intensity VS. Wavelength

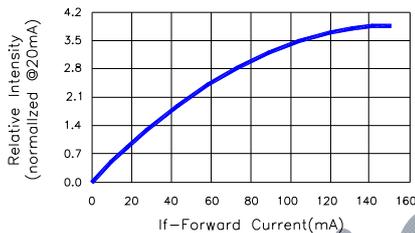


Fig.2-Relative Luminous Intensity vs. Forward Current

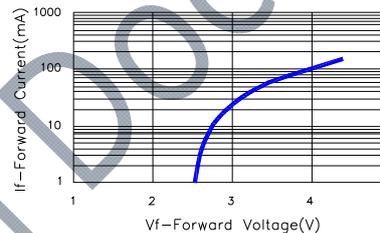


Fig.3-Forward Current vs. Forward Voltage

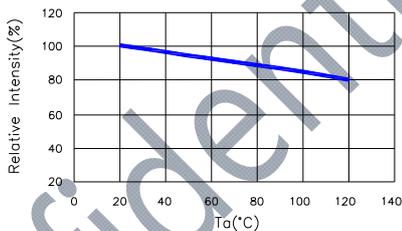


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

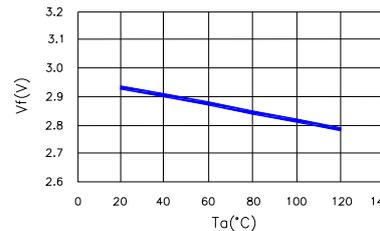


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

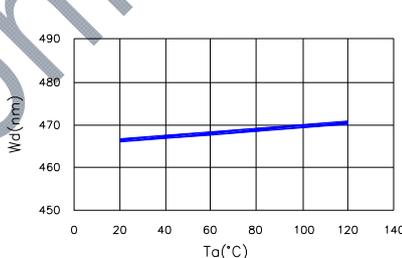


Fig.6-Dominant Wavelength(@20mA)
VS. Ambient Temperature

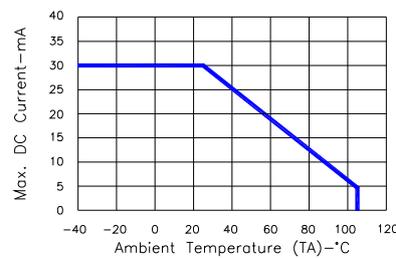


Fig.7-Max. Allowable DC Current
VS. Ambient Temperature




Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-T3050SB-STT(R)-1.5-G(B)W
OPS-T3051SB-STT(R)-1.5-G(B)W

● **SMT REFLOW SOLDERING INSTRUCTIONS**

SMT Soldering Profile

Pb free reflow soldering Profile

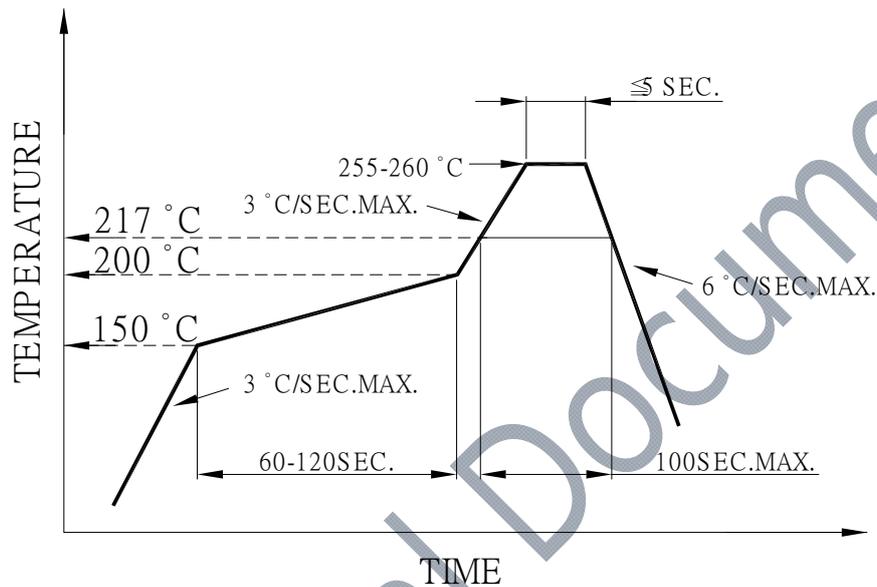

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




Opto Plus LED Corp.

0.30" SMD Type LED Display


OPS-T3050SB-STT(R)-1.5-G(B)W

OPS-T3051SB-STT(R)-1.5-G(B)W

● REEL DIMENSIONS

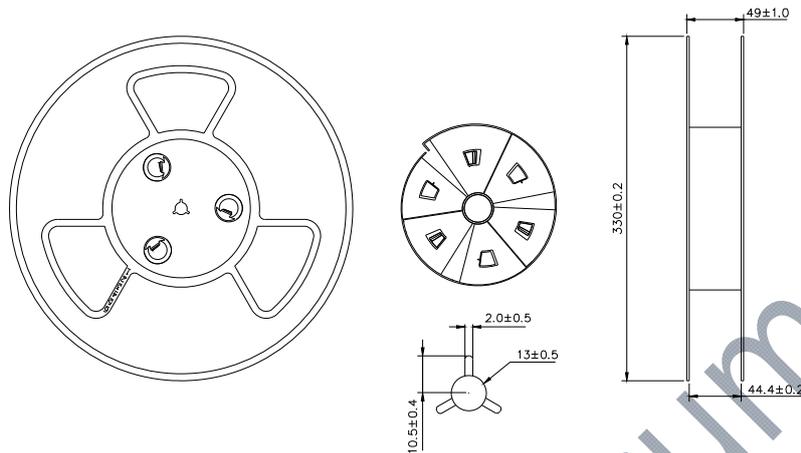

● PACKING & LABEL SPECIFICATIONS

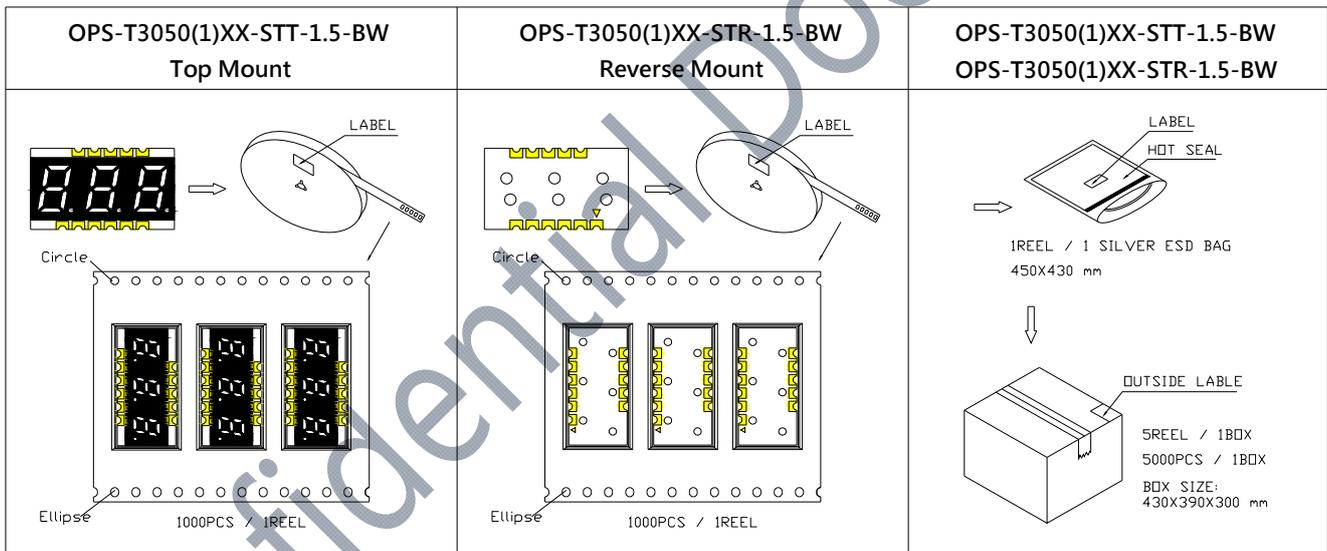

● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)