




MTA 156

TE Internal #: 3-640602-3

3 Position, Receptacle, Connector Assembly, Insulation Displacement (IDC), Wire-to-Board, Tin (Sn), Normal, UL 94V-2, MTA 156

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors

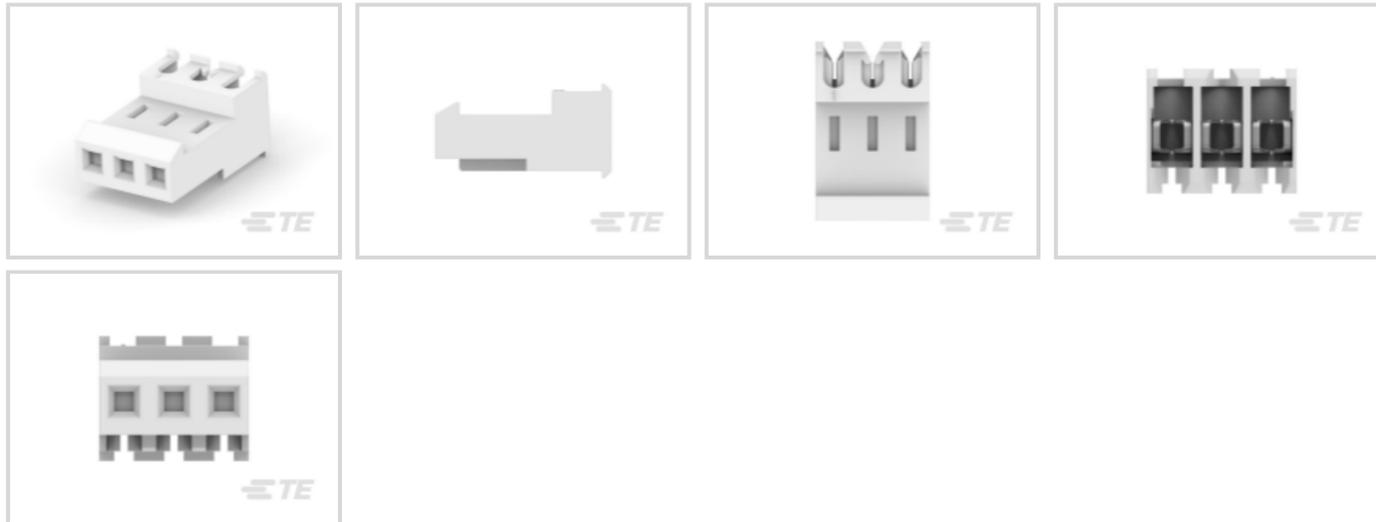

Connector Product Type: **Connector Assembly**

Mating Alignment: **Without**

Connector & Housing Type: **Receptacle**

Mating Retention Type: **Locking Ramp**

Connector System: **Wire-to-Board**

Features

Product Type Features

| | |
|------------------------------------|--------------------|
| Compatible With Discrete Wire Type | Stranded |
| Connector Product Type | Connector Assembly |
| Connector & Housing Type | Receptacle |
| Connector System | Wire-to-Board |
| Insertion Force Type | Normal |
| Sealable | No |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

| | |
|---------------------|-----|
| Number of Cavities | 3 |
| Contacts Preloaded | Yes |
| Number of Positions | 3 |
| Number of Rows | 1 |

Electrical Characteristics

| | |
|-------------------|---------|
| Operating Voltage | 600 VAC |
|-------------------|---------|



Body Features

| | |
|-----------------------|-------|
| Primary Product Color | White |
|-----------------------|-------|

Contact Features

| | |
|-------------------------------|--------|
| Contact Underplating Material | Nickel |
|-------------------------------|--------|

| | |
|--|-----|
| Wire Contact Termination Area Plating Material | Tin |
|--|-----|

| | |
|--------------|------------|
| Contact Type | Receptacle |
|--------------|------------|

| | |
|--------------------------------------|----------|
| Contact Mating Area Plating Material | Tin (Sn) |
|--------------------------------------|----------|

| | |
|----------------------------------|------|
| Contact Retention Within Housing | With |
|----------------------------------|------|

| | |
|------------------------------|-----|
| Contact Current Rating (Max) | 7 A |
|------------------------------|-----|

Termination Features

| | |
|------------------------------------|-------------------------------|
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
|------------------------------------|-------------------------------|

Mechanical Attachment

| | |
|---------------------------------------|---------------|
| Contact Retention Type Within Housing | Locking Lance |
|---------------------------------------|---------------|

| | |
|------------------|---------|
| Mating Alignment | Without |
|------------------|---------|

| | |
|-----------------------|--------------|
| Mating Retention Type | Locking Ramp |
|-----------------------|--------------|

| | |
|------------------|------|
| Mating Retention | With |
|------------------|------|

| | |
|-------------------------|----------------------------|
| Connector Mounting Type | Cable Mount (Free-Hanging) |
|-------------------------|----------------------------|

Housing Features

| | |
|------------------|-------|
| Housing Material | Nylon |
|------------------|-------|

| | |
|--------------------|------------------|
| Centerline (Pitch) | 3.96 mm[.156 in] |
|--------------------|------------------|

Dimensions

| | |
|-----------------|------------------|
| Connector Width | 9.78 mm[.385 in] |
|-----------------|------------------|

| | |
|------------------|-------------------|
| Connector Height | 18.42 mm[.725 in] |
|------------------|-------------------|

| | |
|-----------|--------|
| Wire Size | 24 AWG |
|-----------|--------|

| | |
|------------------|-------------------|
| Connector Length | 23.77 mm[.936 in] |
|------------------|-------------------|

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|----------|----|
| Shielded | No |
|----------|----|

| | |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards



| | |
|---|------------|
| Compatible With Agency/Standards Products | CSA, UL |
| UL Rating | Recognized |
| Compatible With Approved Standards Products | UL E28476 |
| CSA Rating | LR 7189 |
| UL Flammability Rating | UL 94V-2 |

Packaging Features

| | |
|--------------------|---------|
| Packaging Quantity | 500 |
| Packaging Method | Bag/Box |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 2472633-1
03P MTA156 HDR ASSY W/O#2 LF W/ CHMFR




TE Part # 2-647127-3
03P MTA156 SHRD HDR ASSY LF




TE Part # 640389-3
03P MTA156 HDR ASSY SQ R/A F/L



TE Part # 59804-1
MAINTENANCE TOOL



TE Part # 641937-1
03P MTA156 HDR ASSY STR W/O#2



TE Part # 3-644615-3
03P MTA156 POL HDR ASSY LF




TE Part # 640385-3
03P MTA156 HDR ASSY SQ R/A




TE Part # 644749-3
03P MTA156 HDR ASSY STR SQ SN




TE Part # 3-641438-3
03P MTA156 PSTD CONN ASSY WHT



TE Part # 640388-3
03P MTA156 HDR ASSY RN STR F/L




TE Part # 644752-3
03P MTA156 HDR ASSY SQ STR F/L



TE Part # 641937-2
03P MTA156 HDR ASSY SQ W/O#3




TE Part # 644750-3
03P MTA156 HDR ASSY STR RND SN

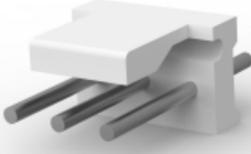

TE Part # 644753-3
03P MTA156 HDR ASSY RN STR F/L



TE Part # 2-647125-3
03P MTA156 SHRD HDR ASSY LF



TE Part # 3-644613-3
03P MTA156 HDR RA PO WO PEG LF




TE Part # 3-644617-3
03P MTA156 HDR ASSY PO RA FB LF



TE Part # 58074-1
MTA 50/100/156 MANUAL TOOL FRAME



TE Part # 3-641522-3
03P MTA156 PSTD CONN ASSY ORNG



TE Part # 641937-3
03P MTA156 HDR ASSY SQ W/O#1


Also in the Series | **MTA 156**



Connector Contacts(4)



Connector Hardware(2)

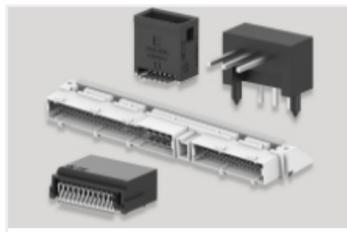

PCB Headers & Receptacles(677)




Power Contacts(3)



Rectangular Power Connectors(1178)



Standard Rectangular Connectors(667)

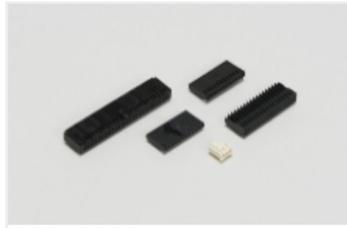


Wire-to-Board Connector Assemblies & Housings(594)

Customers Also Bought



TE Part #EP3166-000
0026G8424-9

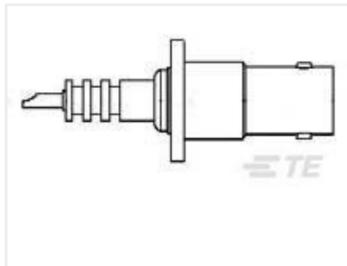


TE Part #51421-2
SHV PANEL RECPT




TE Part #174656-7
10 POS DL PLATE FOR PLUG MKII+



TE Part #3-640427-3
03P MTA156 CONN ASSY 20AWG YEL

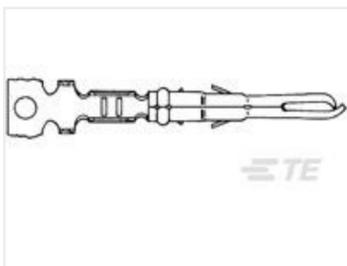

TE Part #640545-2
MR SPLIT PIN 26-18 AUPHBRZ LP

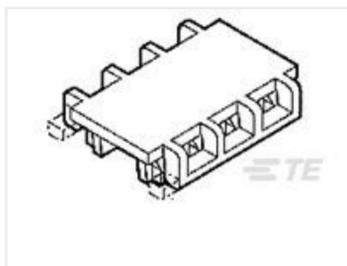

TE Part #643071-3
03P MTA156 FD-THRU COVER



TE Part #770985-3
MINI UMNL PIN 26-22AWG AU LP



TE Part #770986-3
MINI UMNL SOK 26-22AWG AU LP



TE Part #1-1393118-4
KUP-14D15-24=KU-



TE Part #9-1879350-0
RR01 5% 1K1 AMMO

Documents



Product Drawings

03P MTA156 CONN ASSY 24AWG LF

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_3-640602-3_V.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-640602-3_V.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-640602-3_V.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_3-640602-3_Z.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_3-640602-3_Z.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_3-640602-3_Z.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ENG_DS_82056_MTA_0818.pdf

English

Product Specifications

Application Specification

English

Application Specification

Japanese

Application Specification

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

Japanese



[Agency Approvals](#)

[Agency Approval Document](#)

English