



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: **Receptacle**
Connector & Housing Type: **Receptacle**
Number of Positions: **2**
Terminal Orientation: **Straight**
UL Flammability Rating: **UL 94V-2**

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Sealable	No
Connector System	Wire-to-Board, Wire-to-Wire
Connector & Housing Type	Receptacle

Configuration Features

Number of Positions	2
---------------------	---

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Mating Retention	Without

Mechanical Attachment

Mating Alignment Type	Polarization
-----------------------	--------------



Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Polyamide
Centerline (Pitch)	10 mm[.393 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	1300
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

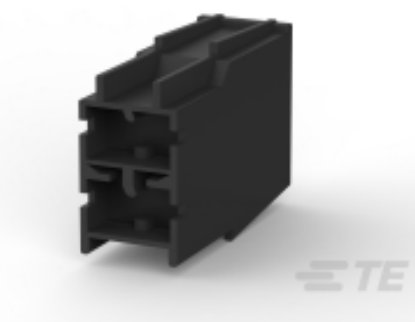
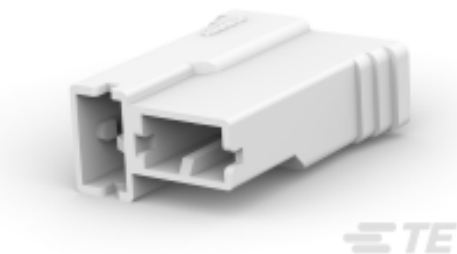
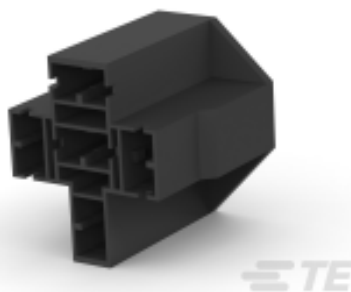
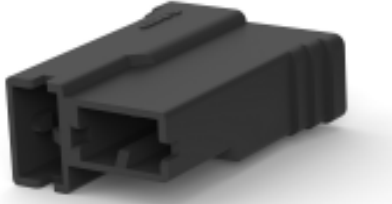
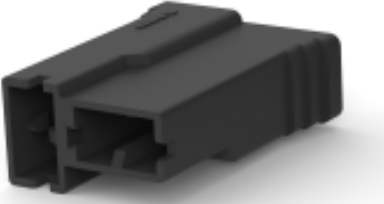
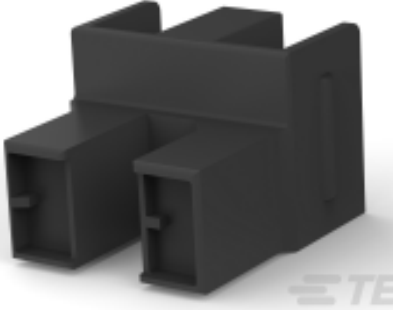
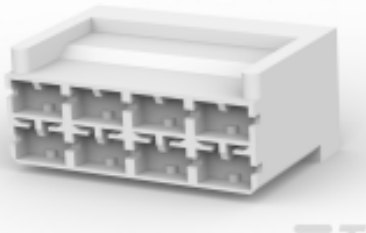
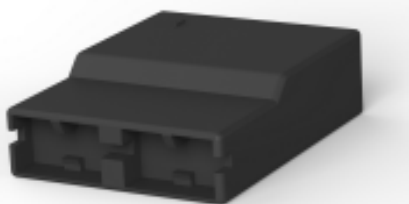
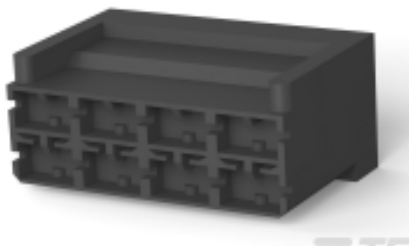
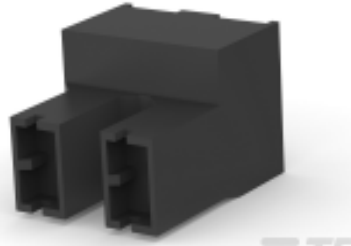
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides




on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 100100-1 2 POS POSITIVE LOCK (PL) HOUSING	 TE Part # 926522-2 PL 250 REC HSG 2P NYLON NAT	 TE Part # 926526-1 PL MKI 250 REC HSG 5P NYLON BLACK	 TE Part # 927076-1 PL HOUSING 0.6 PA 6.6 + PE-GF13 BLACK
 TE Part # 179720-2 PL 187 (4.8 MM) HOUSING RECEPTACLE	 TE Part # 926522-1 PL 250 REC HSG 2P NYLON BLACK	 TE Part # 1-926522-1 PL 250 REC HSG 2P NYLON BLACK	 TE Part # 185010-2 HEADLIGHT HOUSING HOUSING
 TE Part # 926646-8 PL 250 8P HOUSING PA6.6 ZYTEL 101 WHITE	 TE Part # 926716-1 PL 2P HOUSING PA 6.6 ZYTEL 101 BLACK	 TE Part # 926646-1 PL 250 REC HSG 8P NYLON BLACK	 TE Part # 926319-1 PL 250 REC HSG 2P NYLON BLACK


Also in the Series | Positive Lock 250

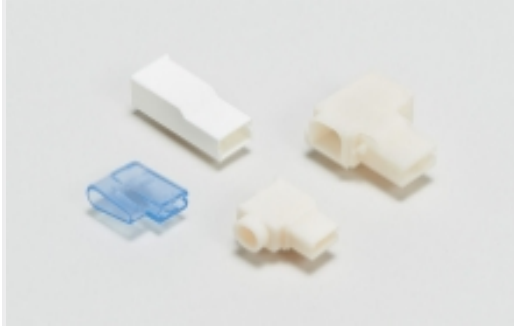 Automotive Terminals(1)	 Crimp Terminal Housings(176)	 Insertion & Extraction Tools(3)	 Insulation Boots & Sleeves(5)
--	--	--	--




[Quick Disconnects\(171\)](#)

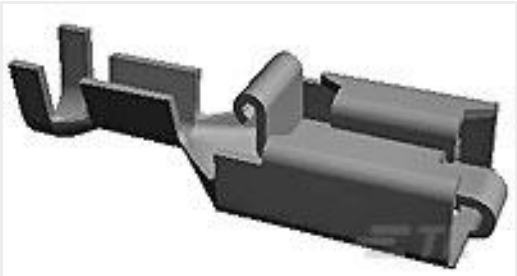Customers Also Bought



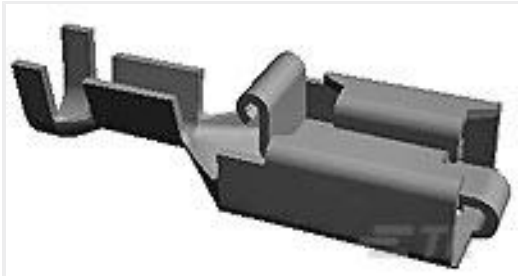
TE Part #154718-3
[PL 250 REC 0.7-2.0 MM2 0.406 TPBR](#)



TE Part #1-160759-1
[250 PL MKI REC. 20-15AWG PTBR](#)



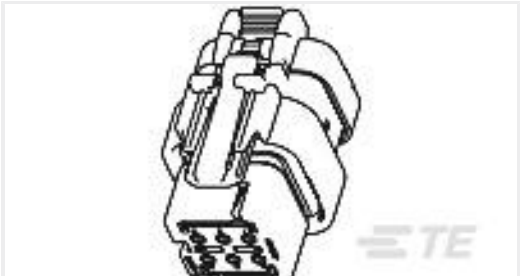TE Part #184002-1
[2 POS. PLUG ASSY, KEY B, GRAY](#)




TE Part #776437-3
[AS16,PLUG ASSY,ST,12P,N SEAL, CODE C](#)




TE Part #1718878-2
[5POS. HSG. JPT/AMP MCP, ASS'Y, SEALED](#)



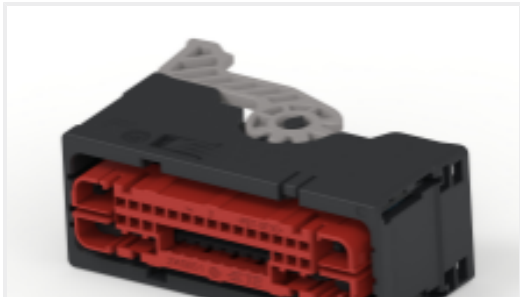TE Part #1823396-1
[50POS,ELO 0.63,REC HSG,1KSLEFT, ASSY](#)



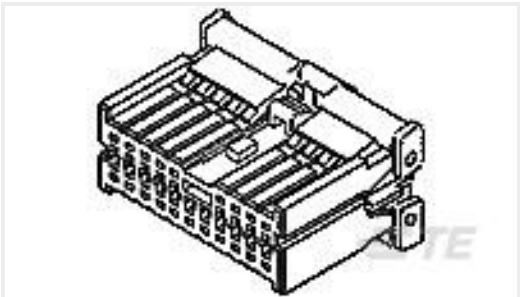TE Part #2351963-1
[46POS,HYBRID,REC HSG ASSY,SLD, COD A](#)



TE Part #1123375-3
[040 MLC PLUG HSG ASSY 16P](#)



TE Part #3-2310537-4
[PLUG ASSY, KEY D, CPA, HVA280-2PHI, V0](#)



TE Part #2368247-4
[6POS,MQS,REC HSG,COD D](#)

Documents

Product Drawings

[PL 250 REC HSG 2P NYLON BLACK](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_926521-2_L.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_926521-2_L.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_926521-2_L.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Positive Lock Receptacles](#)

English

Agency Approvals

[UL Report](#)

English