


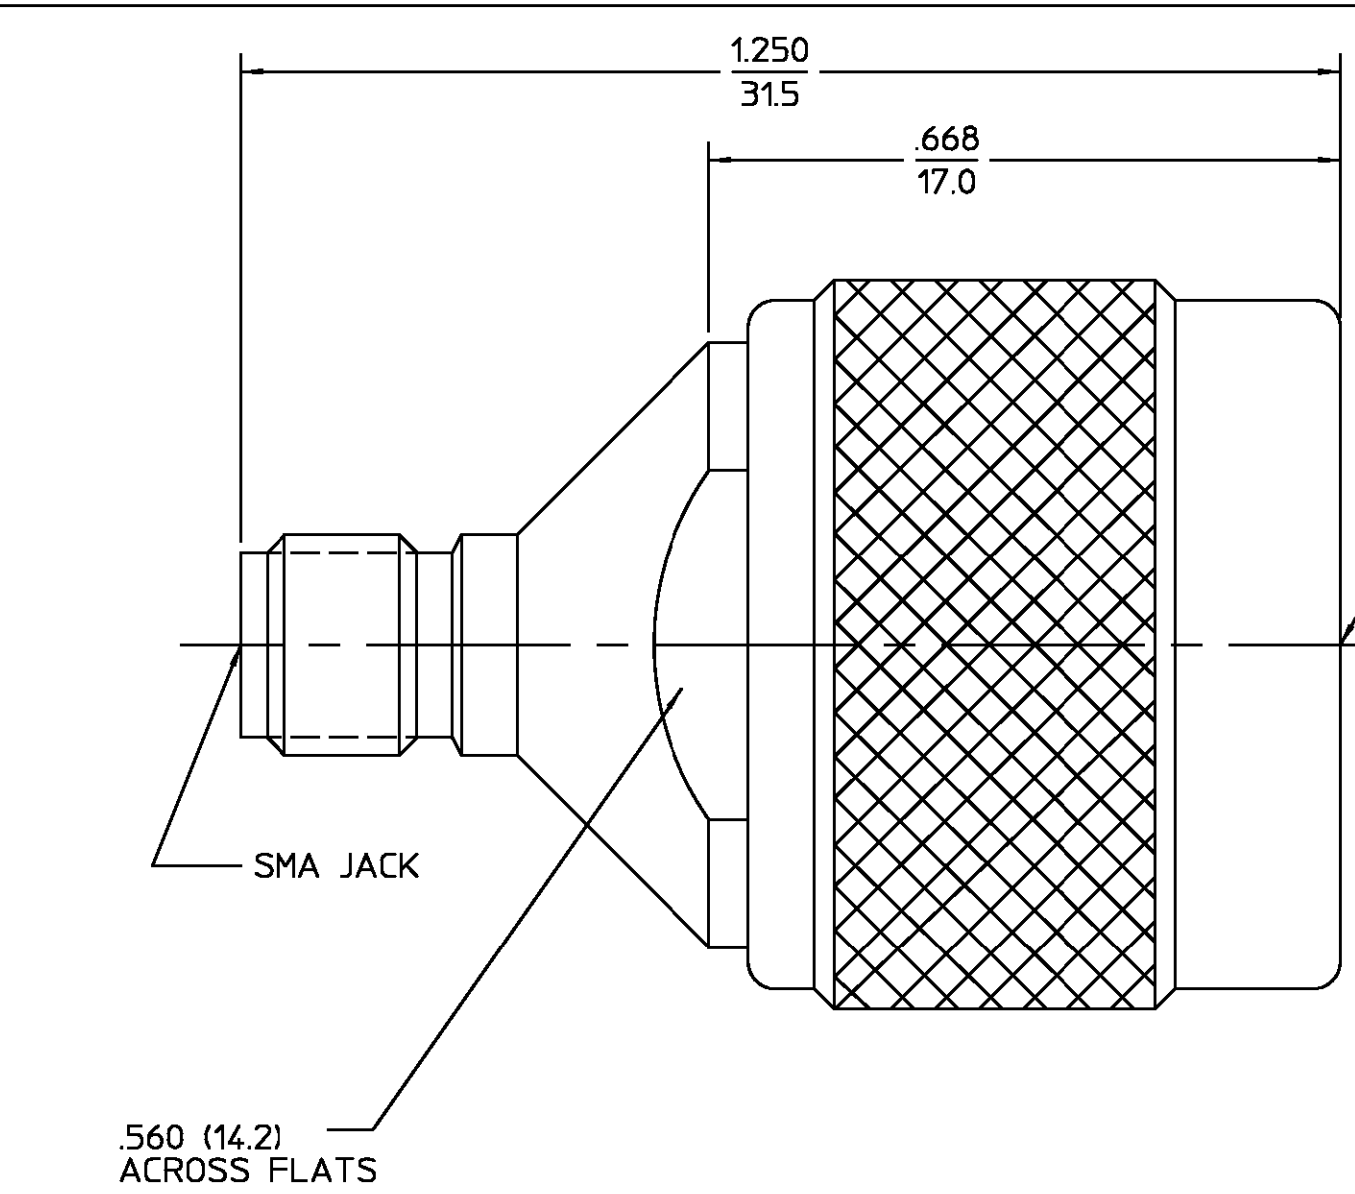

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₃	REVISED	DM 9/13/99	<i>DM</i> 9/20/99

HOUSING COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		
DRAWN BY RBG DATE 6/4/77 CHECKED BY KWW 6/4/77 APPD BY RMF 6/4/77		
AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
TITLE TYPE N PLUG TO SMA JACK ADAPTER		
USE ASSY PROCEDURE		
N/A		
NO. A.P. _____		
SIZE B CODE IDENT NO. 26805 3082-2240-00 REV 01 ₃		
SCALE 5:1 SHEET 1 OF 1		

NOTES:
1. CAPTURED CENTER CONTACT
2. VSWR: DC-12.4GHz :1.06+.005fGHz MAX
12.4-18.0GHz : 0.83+.023fGHz MAX