

120W - 960W DIN Rail Mount Three Phase Power Supplies

<https://product.tdk.com/en/power/dr>

<https://www.emea.lambda.tdk.com/uk/products/dr-3-phase-series>



The DRB120-3, DRB240-3, DRB480-3 and DRB960-3 series supports the growing trend for mid range 3-phase and DC input DIN power supplies for industrial and process control applications. The series offers an excellent balance between functionality and price, combining reliability and compact dimensions with energy saving efficiencies of up to 96.3%. Conservatively rated electrolytic capacitor temperatures offer improved field life-times of typically 10 years. Now available in four power levels, 120, 240, 480 and 960W, the series provides a choice of 12V, 24V, 48 or 72V outputs. All models have boost (peak) power ratings to handle capacitive loading. A low energy inrush current level avoids nuisance tripping of circuit breakers. Units can be connected in parallel to provide more power or for redundant applications. A DC Good relay and remote on/off is fitted as standard. A choice of models with either screw or push-in wire terminals for automated and robotic wiring and pcb board coating for polluted environments.

Features	Benefits
• 380 to 500Vac and 450 to 810Vdc Nominal Inputs	• Supports a Wide Range of Applications
• 50% Boost (peak) Power Ratings for up to 600 Seconds	• Supports Capacitive and Inductive Loads
• Narrow Case Widths	• Occupies Less Space on the DIN rail
• High Efficiency up to 96.3%	• Reduced Energy Usage
• Long E-Capacitor Life (typically 10 Years)	• Improved Field Life
• Low Off-Load Power Consumption	• Saves Energy

Model Selector							
Letter "x" indicates termination type and coating (See part numbering scheme section)	Output Voltage (V)	Adjustment Range (V)	Maximum Current (A)	Maximum Peak Current (A) ⁽¹⁾	Maximum Power (W)	Maximum Peak Power (W) ⁽¹⁾	Efficiency (%) (400/500Vac) ⁽²⁾
DRB120-12-3-Ax	12	11.4 - 15	10	14.5 for 600s	120	174	89.4 / 89.1
DRB120-24-3-Ax	24	22.5 - 29	5	7.5 for 600s	120	180	91.3 / 91.2
DRB240-24-3-Ax	24	22.5 - 29	10	15 for 60s	240	360	93.1 / 93.2
DRB240-48-3-Ax	48	45 - 56	5	7.5 for 60s	480	360	93.8 / 94.0
DRB480-24-3-Ax	24	22.5 - 29	20	30 for 7s	480	720	95.1 / 94.9
DRB480-48-3-Ax	48	45 - 56	10	15 for 7s	480	720	95.3 / 95.1
DRB480-72-3-Ax	72	70 - 85	6.7	10 for 5s	480	720	95.8 / 95.6
DRB960-24-3-Ax	24	22.5 - 29	40	60 for 5s	960	1440	95.2 / 95.1
DRB960-48-3-Ax	48	45 - 56	20	30 for 5s	960	1440	95.9 / 95.8
DRB960-72-3-Ax	72	70 - 85	13.3	20 for 5s	960	1440	96.3 / 96.2

Related Products		
Type	Part Number(s)	Description
Redundancy module	DRM40	20 to 40A DIN rail Redundancy module
Buffer DIN rail modules	DBM20	20A DIN rail Buffer (hold-up) modules
Low power DIN rail power supplies	DRB15, 30, 50, 100	15 to 100W AC-DC single phase DIN rail power supplies
Mid power DIN rail power supplies	DRB120, 240, 480	120 to 480W AC-DC single phase DIN rail power supplies
Mid to high power premium DIN rail power supplies	DRF120, 240, 480, 960	120 to 960W AC-DC single phase DIN rail power supplies
DIN rail mount filters	RTMN	6A to 60A 500Vac three phase 2 stage filters with pulse attenuation
Mid to low power DIN rail power supplies	D1SE	120 to 480W AC-DC single phase DIN rail power supplies
DC-UPS	DUSH	960W DC-UPS DIN Rail Modules

Part Numbering Scheme

DRB	120	- 24	- Option code								
Series	Output Power 120, 240, 480, 960	Output Voltage 12, 24, 48, 72	<table border="1"> <tr><td>A0</td><td>Screw terminals</td></tr> <tr><td>A1</td><td>Push-in terminals</td></tr> <tr><td>A6*</td><td>Screw terminals & board coating</td></tr> <tr><td>A7*</td><td>Push-in terminals & board coating</td></tr> </table>	A0	Screw terminals	A1	Push-in terminals	A6*	Screw terminals & board coating	A7*	Push-in terminals & board coating
A0	Screw terminals										
A1	Push-in terminals										
A6*	Screw terminals & board coating										
A7*	Push-in terminals & board coating										

*Contact sales for model availability for A6 & A7 models

Specifications

Model	DRB120-12-3-Ax DRB120-24-3-Ax	DRB240-24-3-Ax DRB240-48-3-Ax	DRB480-24-3-Ax DRB480-48-3-Ax DRB480-72-3-Ax	DRB960-24-3-Ax DRB960-48-3-Ax DRB960-72-3-Ax
-------	----------------------------------	----------------------------------	--	--

Input					
AC Input Voltage Range	Vac	3-phase 380 - 500.			
Maximum AC Input Voltage Range	Vac	3-phase 342 - 575 (Note: Safety certified for 380-500Vac)			
Input Surge Voltage	Vac	620 for 5s			
Maximum DC Input Voltage Range	Vdc	450 - 810 (External DC fuse is required, see instruction manual)			
Input Frequency	Hz	47 - 63			
Input Current (Per Phase Max)	A	0.5	0.8	1.2	2.2
Input Current (DC Max)	A	0.5	0.8	1.2	2.2
Inrush Current (Typical Cold Start 400 / 500Vac)	A	25 / 30	25 / 30	17 / 22A	17 / 20
Dropped Phase Output Power ⁽¹⁾	W	120	240	240	480
Leakage Current (575Vac, 60Hz)	mA	≤ 1			
Touch Current (575Vac, 60Hz)	uA	≤ 50			
Power Factor (Typ. 400/500Vac)	-	0.5	0.6	0.92	0.94
Harmonic Compliance	-	Meets EN61000-3-2 Class A			
No Load Power Consumption (max in standby) ⁽¹⁾	W	1.7 / 2.1	1.6 / 2.0 1.9 / 2.3	1.6 / 1.9	2.0 / 2.3
Hold Up Time (minimum) at 400 / 500Vac	ms	20 / 40	20 / 40	24	20
Efficiency	-	See model selector table			
Average Efficiency (400 / 500Vac) ⁽³⁾	%	87.7 / 89.8 89.4 / 88.5	92.3 / 91.9 92.8 / 92.3	91.4 / 93.7 94.2 / 93.8 94.5 / 94.1	94.7 / 94.3 95.2 / 94.7 95.5 / 95.0
Conducted & Radiated EMI	-	EN55011-B, CISPR11-B			
Immunity	-	See immunity table			
Safety Certifications and Markings	-	IEC/EN/UL/CSA 61010-1, 61010-2-201, 62368-1, CE Mark and UKCA Mark Designed to meet: IEC 60950-1, EN 60204-1, IEC/EN 62477-1, 61204-7, 61558-2-16, 60068-2-60 (Flowing mixed gas corrosion test) and IEC 60068-2-11 (Salt mist)			

Immunity


Test	Standard	Test Level	Criteria	
ESD	EN61000-4-2	See immunity report	A	4kV contact 8kV air discharge
Radiated Susceptibility	EN61000-4-3	See immunity report	A	10V/m: 80MHz to 1GHz 3V/m 1.4GHz to 2GHz 1V/m 2GHz to 2.7GHz
Electrical Fast Transient Burst	EN61000-4-4	See immunity report	A	Input 4kV 5kHz Output 2kV 5kHz Signal contact 2kV 5kHz
Surge	EN61000-4-5	See immunity report	A	Input symmetrical (L-L) 2kV Input asymmetrical (L-PE) 4kV Output symmetrical (L-L) 0.5kV Output asymmetrical (L-PE) 1kV
Conducted Susceptibility	EN61000-4-6	10V	A	150kHz to 80MHz
Magnetic Fields	EN61000-4-8	30A/m	A	50Hz, 60s each axis (x, y, z)
Voltage Dips and Input Interruptions	EN61000-4-11 EN61000-4-34	500ms	A	400Vac at 70%, 50Hz
		200ms	A	400Vac at 40%, 50Hz
		20ms	A	400Vac at 0%, 50Hz
		5000ms	C	400Vac at 0%, 50Hz

Specifications					
Model		DRB120-12-3-Ax DRB120-24-3-Ax	DRB240-24-3-Ax DRB240-48-3-Ax	DRB480-24-3-Ax DRB480-48-3-Ax DRB480-72-3-Ax	DRB960-24-3-Ax DRB960-48-3-Ax DRB960-72-3-Ax
Output					
Output Voltage Tolerance	%	±3 maximum			
Switching Frequency (Output Converter)	kHz	50 to 135. (Variable with input line and output load)			TBA
Line Regulation	%	0.06		0.05	0.01
Load Regulation (Not in parallel mode)	%	1.2	0.6	0.4	0.65
		0.6	0.2	0.2	0.2
Load Regulation (In parallel mode)	%	3.8	3.1	2.9	3.05
		3.0	2.8	2.9	2.7
				2.7	2.5
Ripple & Noise (+25 to 70°C ambient)	mV	10	10	30	50
			20	40	40
Ripple & Noise (-25 to <+25°C ambient)	mV	20	40	150	65
			30	80	120
				150	150
Minimum Load	-	No minimum load required			
Maximum Load Capacitance	uF	10,000	10,000	20,000	20,000
		5,000	5,000	10,000	20,000
Overcurrent Protection (Constant current & hiccup)	%	>142	>142	>145	>147
				>148	>150
				>142	>152
Overvoltage Protection (Auto Recovery)	V	<18.4	<32.7	<32.9	<32.9
		<32.7	<59.2	<59.3	<58.2
				<91.5	<91.5
Overtemperature Protection	-	Yes. Auto recovery			
Remote Sense	-	None			
Remote On/Off	-	Closed contact or <4V enables output			
DC Good	-	Closed contact relay when output voltage is >95%			
Indicators	-	Green LED indicates DC is OK			
Parallel Operation	-	Front panel DIP switch to enable parallel droop mode current sharing. Refer to Technical Datasheet when paralleling.			
Environmental					
Operating Temperature Nominal (-40°C start-up ⁽⁴⁾)	°C	-25 to +55 full load, up to 70 with derating (see Technical Datasheet)			
Operating Temperature Derating Above 55°C	W/°C	2	2.4	12	16
		0.8	2.6	9.6	16
				8	6.24
Storage Temperature	°C	-40 to +85			
Humidity (Non condensing)	%RH	95 (Operating & Storage)			
Cooling	-	Convection			
Altitude	m	3,000 nominal, (6,000 maximum no UL certification)			
Withstand Voltage (For 1 minute)	Vac	Input to Output 6,400, Input to GND 2,210, Output to GND and signals 1,390			
Vibration (Non operating)	-	IEC 60068-2-6: 2g / 10 to 500Hz, 1 hour/direction X,Y,Z on DIN rail			
Shock (Non operating)	-	IEC 60068-2-27, 30g / 11ms ±5ms, 3 x each axis on DIN rail			


Specifications					
Model		DRB120-12-3-Ax DRB120-24-3-Ax	DRB240-24-3-Ax DRB240-48-3-Ax	DRB480-24-3-Ax DRB480-48-3-Ax DRB480-72-3-Ax	DRB960-24-3-Ax DRB960-48-3-Ax DRB960-72-3-Ax
Other					
Weight (Typ)	g	660	780	1050	1750
Size (WxHxD)	mm	55 x 129 x 138.2		65 x 129 x 159.3	100 x 129 x 171.9
Size (WxHxD)	Inches	2.17 x 5.08 x 5.44		2.56 x 5.08 x 6.27	3.94 x 5.08 x 6.77
Case Material	-	Aluminum			
DIN Rail Type	-	TS-35/7.5 or TS35/15			
MTBF - Telcordia SR-332 issue 4*	Hours	1,100,000	1,100,000	880,000	760,000
Warranty	Years	3			

Notes
 See website for detailed specifications, test methods and installation manual
 (1) See Technical specifications for conditions
 (2) Minimum at 100% load
 (3) Average efficiency under 25%, 50%, 75% and 100% load conditions, according to eco-design requirements of EU commission regulation 2019/1782.
 (4) Contact factory for -40°C start up test reports.
 *25°C ambient, full load.
 See website for detailed DC input specifications, test methods and installation manual


Outline Drawing DRB120/240-3

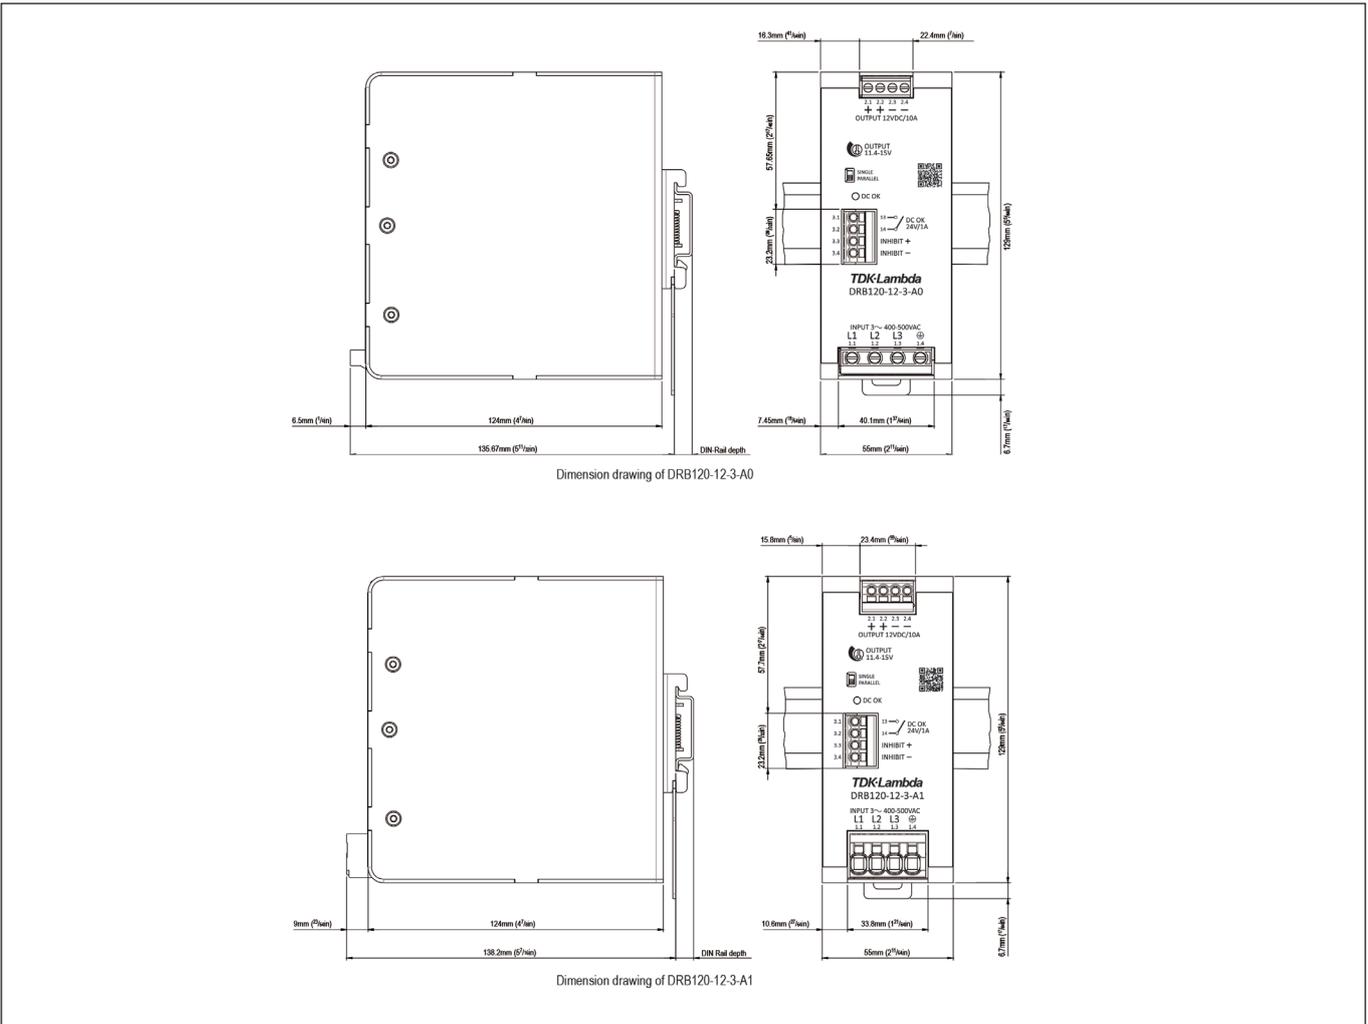

Outline Drawing DRB480-3

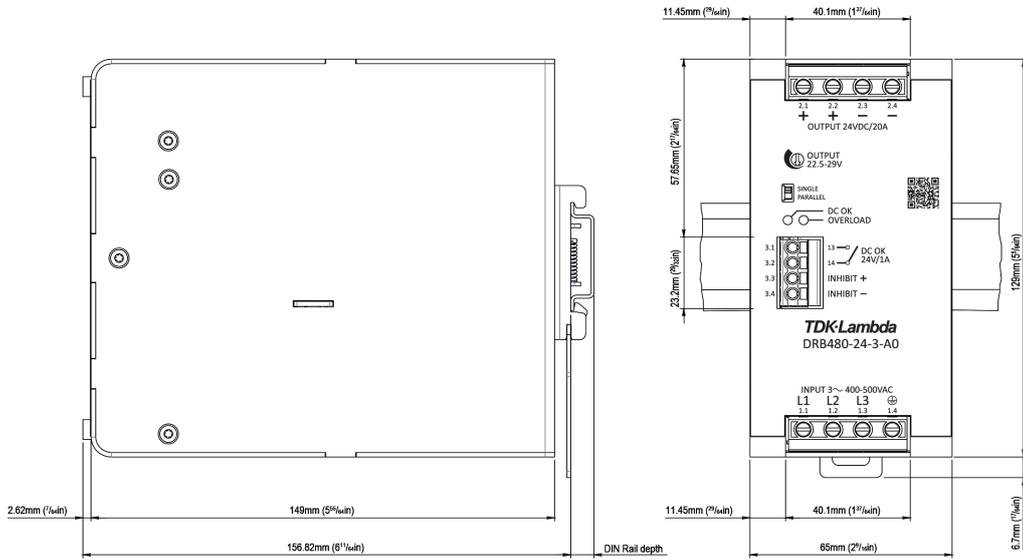


Dimension drawing of DRB480-24-3-A0

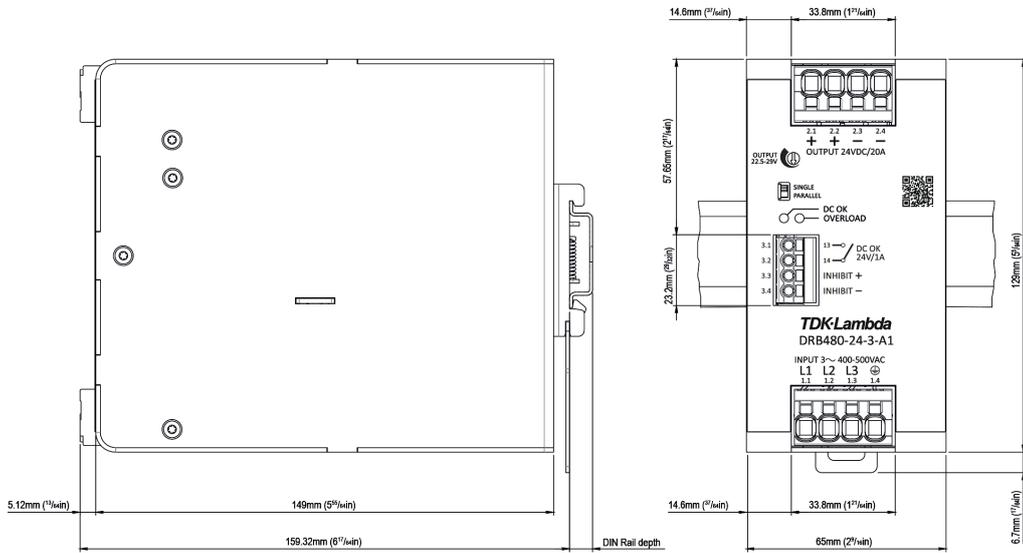


Dimension drawing of DRB480-24-3-A1

Outline DRB960-3

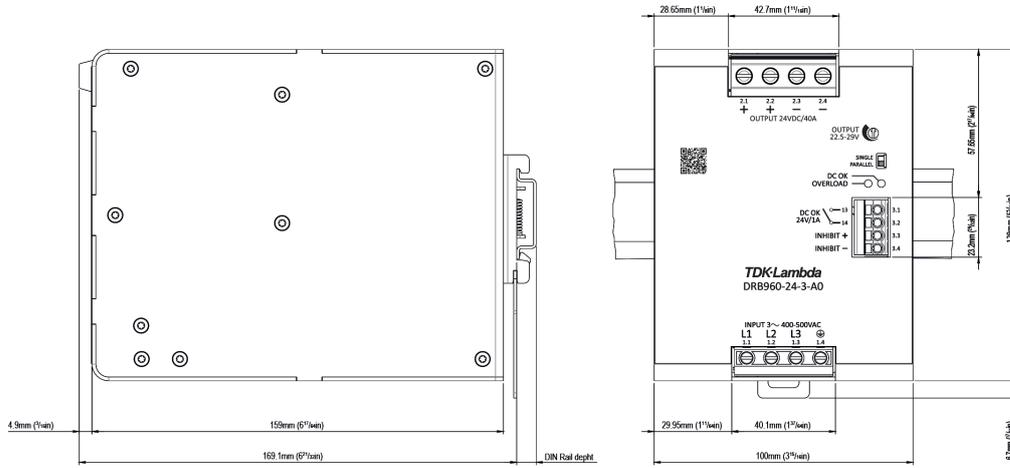

Dimension drawing of DRB960-24-3-A0

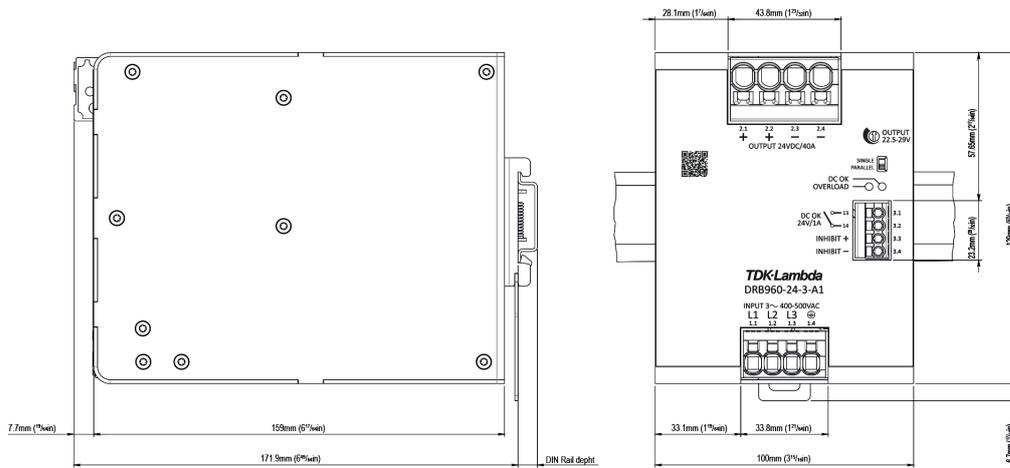

Dimension drawing of DRB960-24-3-A1



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
tif.fr-powersolutions@tdk.com
www.emea.lambda.tdk.com/fr



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tia.powersolutions@tdk.com
www.us.lambda.tdk.com



Italy Sales Office

Tel: +39 02 61 29 38 63
tif.it-powersolutions@tdk.com
www.emea.lambda.tdk.com/it



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



Netherlands

tif.nl-powersolutions@tdk.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda Europe GmbH

Tel: +49 7841 666 0
tlg.powersolutions@tdk.com
www.emea.lambda.tdk.com/de



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
tfc.powersolutions@tdk.com
www.lambda.tdk.com.cn



Austria Sales Office

Tel: +43 2256 655 84
tlg.at-powersolutions@tdk.com
www.emea.lambda.tdk.com/at



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tts.marketing@tdk.com
www.sg.lambda.tdk.com



Switzerland Sales Office

Tel: +41 44 850 53 53
tlg.ch-powersolutions@tdk.com
www.emea.lambda.tdk.com/ch



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com



TDK-Lambda Europe GmbH

Tel: Tel. +45 3222 8086
tlg.dk-powersolutions@tdk.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
tlu.powersolutions@tdk.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
tli.powersolutions@tdk.com
www.emea.lambda.tdk.com/il-en

