

**SERIES:** PDRB-60 | **DESCRIPTION:** AC-DC DIN RAIL POWER SUPPLY

**FEATURES**


- universal input range (85 ~ 264 Vac)
- IEC/EN/UL 62368 certified
- designed to meet 61558 system requirements
- over Voltage Category (OVC) III design
- over voltage, over current, and short circuit protections
- 4kVac isolation input to output
- withstand up to 300 Vac input surge events
- Class B emissions



MODEL	output <sup>1</sup> voltage		output current	output power	ripple and noise <sup>2</sup>	efficiency <sup>3</sup>
	(Vdc)	range (Vdc)	max (A)	max (W)	max (mVp-p)	typ (%)
PDRB-60-5	5	4.9 ~ 5.5	6.5	33	100	84
PDRB-60-12	12	10.8 ~ 13.8	4.5	54	120	88
PDRB-60-15	15	13.5 ~ 18.0	4.0	60	120	89
PDRB-60-24	24	21.6 ~ 29.0	2.5	60	150	90
PDRB-60-48	48	43.2 ~ 55.2	1.25	60	240	91

- Notes:
1. Output adjustable via built-in trimpot. The actual adjustment range may extend beyond the values listed and care should be taken to ensure the output voltage and output power do not exceed stated limits.
  2. At full load, nominal input, 20 MHz bandwidth oscilloscope.
  3. At 230 Vac input.

**PART NUMBER KEY**

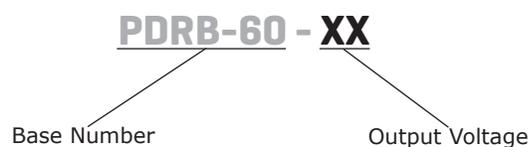

**INPUT**

parameter	conditions/description	min	typ	max	units
input voltage	ac input	85		264	Vac
	dc input	120		370	Vdc
frequency		47		63	Hz
current	at 115 Vac			1.2	A
	at 230 Vac			0.8	A
inrush current	at 115 Vac		30		A
	at 230 Vac		60		A
leakage current	at 264 Vac			0.25	mA

**OUTPUT**

parameter	conditions/description	min	typ	max	units
capacitive load	5 Vdc output models			20,000	μF
	12 Vdc output models			10,000	μF
	15 Vdc output models			8,000	μF
	24 Vdc output models			4,000	μF
	48 Vdc output models			680	μF
initial set point accuracy	0% ~ 100% load		±2		%
line regulation	at rated load		±0.5		%
load regulation	at 230 Vac		±1.5		%
start-up time				3	s
hold-up time	at 115 Vac		15		ms
	at 230 Vac		80		ms
switching frequency			65		kHz
temperature coefficient			±0.02		%/°C
no load power consumption	at 230 Vac				
	5 Vdc, 12 Vdc, 15 Vdc, 24 Vdc output models 48 Vdc output models			0.3 0.4	W W

**PROTECTIONS**

parameter	conditions/description	min	typ	max	units
over voltage protection	clamp or hiccup				
	5 Vdc output models			7.5	Vdc
	12 Vdc output models			16	Vdc
	15 Vdc output models			20	Vdc
	24 Vdc output models			36	Vdc
	48 Vdc output models			60	Vdc
over current protection	auto recovery	120			%
short circuit protection	continuous, auto recovery, hiccup				

**SAFETY & COMPLIANCE**

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output 5 mA for 1 minute	4,000			Vac
safety approvals	certified to 62368:IEC, EN, UL/cUL				
safety class	Class II				
conducted emissions	CISPR32/EN55032 CLASS B				
radiated emissions	CISPR32/EN55032 CLASS B				
ESD	IEC/EN61000-4-2 Contact ±6KV/Air ±8KV perf. Criteria A				
radiated immunity	IEC/EN61000-4-3 10V/m perf. Criteria A				
EFT/burst	IEC/EN61000-4-4 ±2KV perf. Criteria A				
surge	IEC/EN61000-4-5 line to line ±2KV perf. Criteria A				
conducted immunity	IEC/EN61000-4-6 10Vr.m.s perf. Criteria A				
voltage dips and interruption	IEC/EN61000-4-11 0%, 70% perf. Criteria A				
MTBF	as per MIL-HDBK-217F at 25°C	300,000			hours
RoHS	yes				

**ENVIRONMENTAL**

parameter	conditions/description	min	typ	max	units
operating temperature	see the derating curve	-40		70	°C
storage temperature		-40		85	°C
storage humidity	non-condensing	0		95	%
altitude				2,000	m


## MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	92.66 x 52.00 x 58.00				mm
material	plastic, heat-resistant (UL94V-0)				
weight			175		g
cooling	natural convection				

## MECHANICAL DRAWING


units: mm [inch]  
 ADJ: built-in trimpot  
 wire range: 24-12 AWG  
 tightening torque: Max 0.4 N·m  
 mounting rail: TS35  
 general tolerances: ±1.0 [±0.039]

TERMINAL CONNECTIONS	
TERMINAL	Function
1	AC (L)
2	AC (N)
3	+Vo
4	+Vo
5	-Vo
6	-Vo

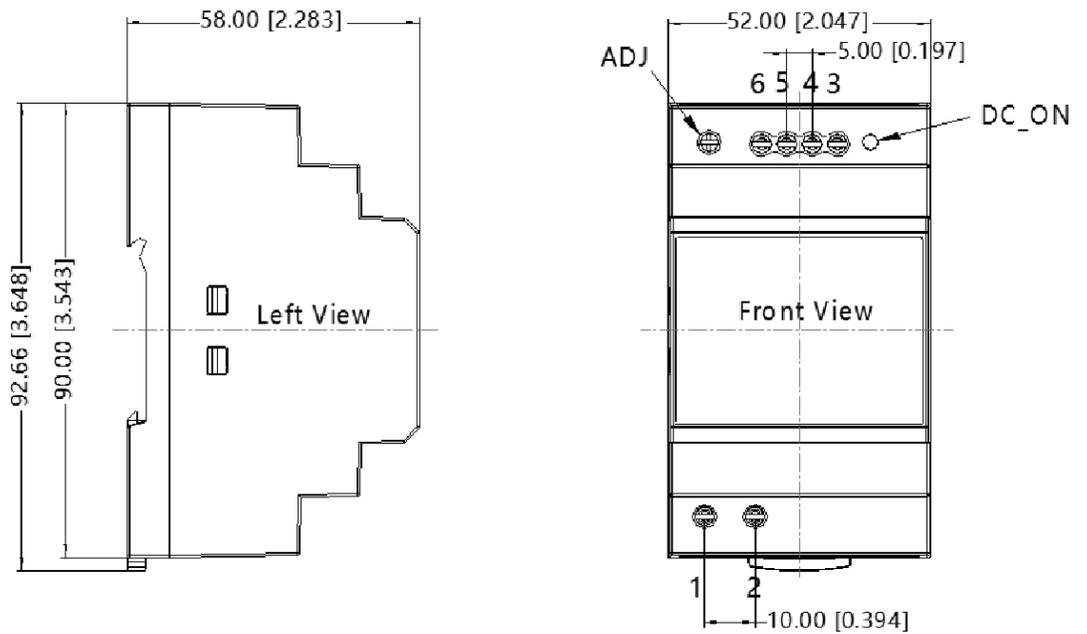


## DERATING CURVE

**TEMPERATURE DERATING CURVE**

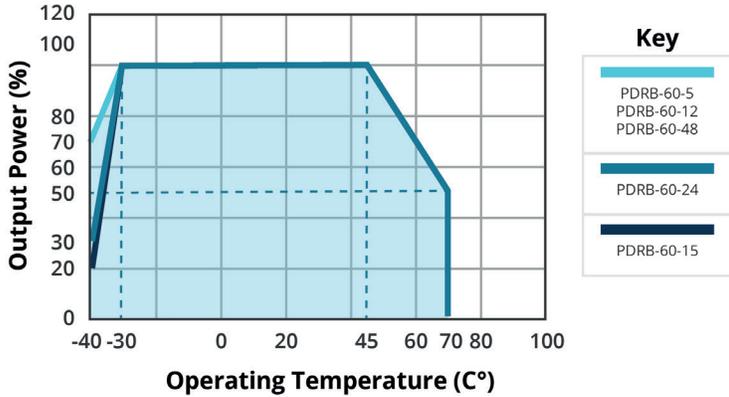


**INPUT VOLTAGE DERATING CURVE (25°C)**

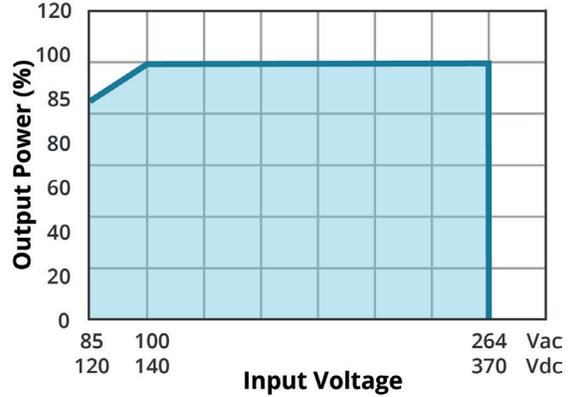


## EFFICIENCY CURVES

**EFFICIENCY VS INPUT LOAD (full load)**

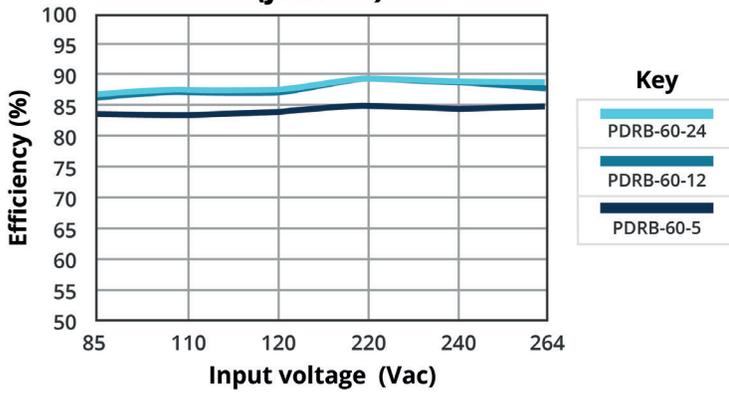

**EFFICIENCY VS OUTPUT LOAD (Vin = 230 Vac)**

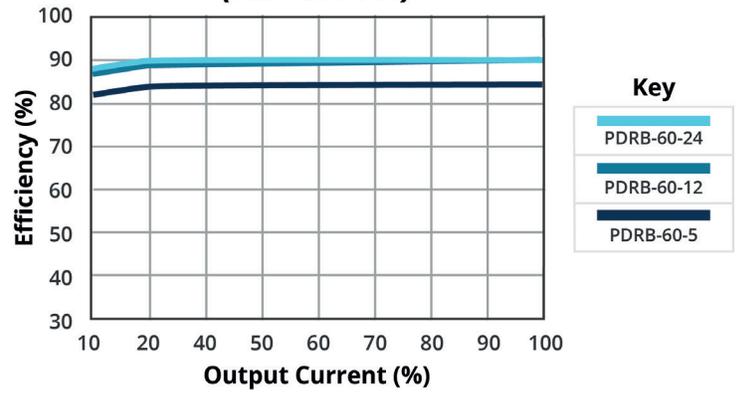

## REVISION HISTORY

---

rev.	description	date
1.0	initial release	11/25/2020
1.01	derating and efficiency curves updated	02/21/2022
1.02	UKCA mark added	05/26/2022

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.