

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



QUINT AC UPS, IQ Technology, Panel mounting, input: 120 V AC, output: 120 V AC / 1500 VA.

## Product description

The QUINT HP UPS for panel mounting, with IQ Technology and matching external battery module, ensures superior system availability. The online topology with a pure sine wave reliably supplies your AC loads with a perfect voltage at powers ranging from 1.5 kVA to 2.5 kVA.

## Your advantages

- Pure sine wave in normal and battery operation
- Can be switched in parallel for increased performance, redundancy, or for a 3 AC system
- Startup from the energy storage system possible, even without mains input
- Communication platform: Com.board with USB or serial interface
- Compact design with active cooling

## Commercial data

Item number	1136804
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CM30
Product key	CMUW15
GTIN	4063151072926
Weight per piece (including packing)	4,900 g
Weight per piece (excluding packing)	4,400 g
Customs tariff number	85371091
Country of origin	DE

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## Technical data

### Input data

Input voltage	100 V AC -10 % / +20 %
	110 V AC -10 % / +20 %
	120 V AC -10 % / +15 %
	130 V AC -15 % / +10 %
Voltage type of supply voltage	AC
Frequency range ( $f_N$ )	47.5 Hz ... 52.5 Hz
	57 Hz ... 63 Hz
Bypass fuse	30 A T 250 V
Permissible backup fuse	32 A (Listed breaker)
Current consumption	nom. 19 A (100 V AC)
	nom. 17.3 A (110 V AC)
	nom. 15.9 A (120 V AC)
	nom. 14.6 A (130 V AC)
	max. 25.8 A (100 V AC)
	max. 23.4 A (110 V AC)
	max. 21.5 A (120 V AC)
max. 21 A (130 V AC)	
Rated short-time current carrying capacity $I_{cw}$	6 kA

### Output data

Classification according to IEC 62040-3	VFI-SS-111
Efficiency	> 94 % (100% load, battery charged)
	> 90 % (100% load, battery charged)
Apparent power	1500 VA
Real power	1350 W
Power factor (cos phi)	0.9
Crest factor	2.8
Switch-over time	0 ms
Connection in parallel	yes
	max. 3
Connection in series	no
Overload capability Mains operation	120 % ... 150 % (20 s / 5 s, then switch to bypass operation)
Overload capability Battery operation	120 % ... 150 % (20 s / 5 s, then shutdown)
Overload capability Bypass mode	120 % ... 150 % (for a sustained period / 20 s, then shutdown)
Rated short-time current carrying capacity $I_{cw}$	6 kA

### Mains operation

Output voltage	100 V AC $\pm 2$ %
	110 V AC $\pm 2$ %

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

	120 V AC $\pm 2\%$
	130 V AC $\pm 2\%$
Form of output voltage	Pure sine
Output current	nom. 15 A (100 V AC)
	nom. 13.6 A (110 V AC)
	nom. 12.5 A (120 V AC)
	nom. 11.5 A (130 V AC)
Maximum no-load power dissipation	28 W
Power loss nominal load max.	75 W (100% load, battery charged)
Nominal output frequency	50 Hz
	60 Hz
	$\pm 0.5\%$ (Output frequency tolerance)
Electronic current limitation	> 2,5 x Output: Current nom. (> 200 ms)

## Battery operation

Maximum no-load power dissipation	25 W
Power loss nominal load max.	140 W (100% load, battery charged)
Nominal output frequency	50 Hz
	60 Hz
	$\pm 0.5\%$ (Output frequency tolerance)
Total harmonic distortion factor (THD)	< 3 % (linear load)
	< 8 % (non-linear load)
Electronic current limitation	> 2,5 x Output: Current nom. (> 200 ms)

## Energy storage

### Input

Input voltage	48 V DC
	max. 60 V DC
Input current	max. 40 A
Nominal capacity range	7 Ah ... 200 Ah
Charging current	max. 7 A

### Output

Short-circuit current	650 A (< 1,5 ms)
-----------------------	------------------

### General

Connection in parallel	yes
	max. 5
Connection in series	no
IQ-Technology	yes
Permissible backup fuse	40 A
Temperature sensor	yes
Permissible backup fuse	40 A

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## Connection data

### Input

Position	1.x
Identification	1.1 (L), 1.2 (N), 1.3 (⊕   )

### Connection technology

Position marking	1.1 (L), 1.2 (N), 1.3 (⊕   )
------------------	------------------------------

### Conductor connection

Connection method	Push-in connection
rigid	2.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
flexible	2.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
flexible with ferrule without plastic sleeve	2.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
flexible with ferrule with plastic sleeve	2.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
AWG	14 ... 10 (Cu)
Stripping length	10 mm (Rigid/flexible/ferrule)

### Output

Position	2.x
Identification	2.1 (L), 2.2 (L'), 2.3 (N), 2.4 (⊕   )

### Connection technology

Position marking	2.1 (L), 2.2 (L'), 2.3 (N), 2.4 (⊕   )
------------------	--

### Conductor connection

Connection method	Push-in connection
rigid	2.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
flexible	2.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
flexible with ferrule without plastic sleeve	2.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
flexible with ferrule with plastic sleeve	2.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
AWG	14 ... 10 (Cu)
Stripping length	10 mm (Rigid/flexible/ferrule)

### Battery

Position	4.x
Identification	4.1, 4.2

### Connection technology

Position marking	4.1 (+), 4.2 (-)
------------------	------------------

### Conductor connection

Connection method	Push-in connection
rigid	6 mm <sup>2</sup> ... 16 mm <sup>2</sup>
flexible	6 mm <sup>2</sup> ... 16 mm <sup>2</sup>
flexible with ferrule without plastic sleeve	6 mm <sup>2</sup> ... 16 mm <sup>2</sup>

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

flexible with ferrule with plastic sleeve	6 mm <sup>2</sup> ... 16 mm <sup>2</sup>
AWG	8 ... 6 (Cu)
Stripping length	18 mm (Rigid/flexible/ferrule)

## Signal

Position	3.x
Identification	3.1 ... 3.9

## Connection technology

Position marking	3.1 (Alarm), 3.2 (Bat.-Mode), 3.3 (Power Good), 3.4 (Ready), 3.5 (P>Pn), 3.6 (Service Required), 3.7 (Bat.-Start), 3.8 (Remote), 3.9 (SGnd)
------------------	---

## Conductor connection

Connection method	Push-in connection
rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
flexible	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
flexible with ferrule without plastic sleeve	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
flexible with ferrule with plastic sleeve	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
AWG	24 ... 12 (Cu)
Stripping length	10 mm (Rigid/flexible/ferrule)

## Communication

Position	5.x
Identification	5.1 ... 5.3

## Connection technology

Position marking	5.1 (LIN), 5.2 (Parallel Port), 5.3 (Parallel Port)
------------------	---

## Conductor connection

Connection method	RJ45
-------------------	------

## Interfaces

Interface	Battery module communication interface
Number of interfaces	1
Connection method	RJ45
Position	5.x
Locking	Locking clip
Transmission physics	Twisted-Pair 4x2
Interface	Parallel operation communication interface
Number of interfaces	2
Connection method	RJ45
Position	5.x
Locking	Locking clip
Transmission physics	Twisted-Pair 4x2

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## Signaling

### Signal input Bat.-Start

Signalization designation	Bat.-Start
Position	3.x
Position marking	3.7 (Bat.-Start)
Low signal	Connection to SGnd with < 2.7 kΩ
High signal	Open (> 200 kΩ between Bat.-Start and SGnd)

### Signal input Remote

Signalization designation	Remote
Position	3.x
Position marking	3.8 (Remote)
Low signal	Connection to SGnd with < 2.7 kΩ
High signal	Open (> 35 kΩ between Remote and SGnd)

### Signal output Alarm

Position	3.x
Signalization designation	Alarm
Position marking	3.1 (Alarm)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

### Signal output Battery Mode

Position	3.x
Signalization designation	Bat.-Mode
Position marking	3.2 (Bat.-Mode)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

### Signal output Power Good

Position	3.x
Signalization designation	Power Good
Position marking	3.3 (Power Good)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

### Signal output Ready

Position	3.x
Signalization designation	Ready
Position marking	3.4 (Ready)

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

## Signal output P > P<sub>N</sub>

Position	3.x
Signalization designation	P>P <sub>n</sub>
Position marking	3.5 (P>Pn)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

## Signal output Service Required

Position	3.x
Signalization designation	Service Required
Position marking	3.6 (Service Required)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

## Signal ground SGnd

Function	Signal ground
Reference potential	For signal inputs and signal outputs

## Product properties

Product type	AC UPS
Product family	QUINT AC UPS

## Insulation characteristics

Protection class	I
Overvoltage category	II
Pollution degree	3

## Dimensions

### Item dimensions

Width	150 mm
Height	240 mm
Depth	143 mm

### Drill hole

Diameter	5.5 mm
----------	--------

### Installation dimensions

Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	50 mm / 50 mm

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## Mounting

Mounting type	Panel mounting
---------------	----------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C (> 50 °C: 2,5 % / K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 4000 m (> 1000 m: 3 % / 1000 m)
Max. permissible relative humidity (operation)	≤ 95 %
Shock	30g in each direction, according to IEC 60068-2-27
Vibration (operation)	5 Hz ... 100 Hz, 0.7g (EN 60068-2-6)

## Standards and regulations

### Uninterruptible power supply systems

Standard designation	Uninterruptible power supply systems
Standards/specifications	EN 62040-1
	EN 62040-2

## Approvals

### UL

Identification	UL/C-UL Recognized UL 1778
----------------	----------------------------

## EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Interference emission	Noise emission
Noise immunity	Immunity

### Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

### Electrostatic discharge

Contact discharge	± 6 kV
Discharge in air	± 8 kV
Comments	Criterion A

### Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

### Electromagnetic HF field

Frequency range	80 MHz ... 6 GHz
Test field strength	10 V/m

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

Comments	Criterion A
Fast transients (burst)	
Standards/regulations	EN 61000-4-4
Fast transients (burst)	
Input	± 2 kV
	± 2 kV
Output	± 2 kV
Signal	± 2 kV
	± 2 kV (Communication parallel operation, battery module)
Comments	Criterion A
Surge voltage load (surge)	
Standards/regulations	EN 61000-4-5
Surge voltage load (surge)	
Signal	1 kV (asymmetrical)
Comments	Criterion A
Input/Output	± 1 kV (symmetrical)
	± 2 kV (asymmetrical)
Conducted interference	
Standards/regulations	EN 61000-4-6
Conducted interference	
Frequency range	0.15 MHz ... 80 MHz
Signal	10 V (asymmetrical)
Comments	Criterion A
Power frequency magnetic field	
Standards/regulations	EN 61000-4-8
Frequency	60 Hz
Signal	30 A/m
Comments	Criterion A
Harmonic and interharmonic components	
Standards/regulations	EN 61000-4-13
Harmonic and interharmonic components	
Comments	Criterion A
Criteria	
Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply




1136804

<https://www.phoenixcontact.com/us/products/1136804>


## Drawings

Diagram

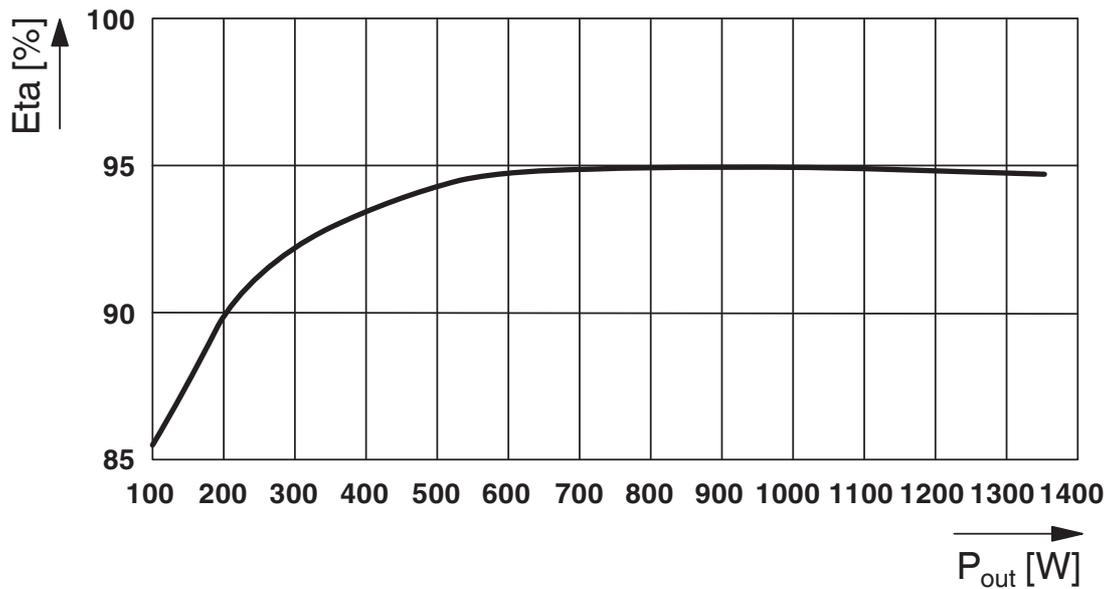

Efficiency (normal operation)

Diagram

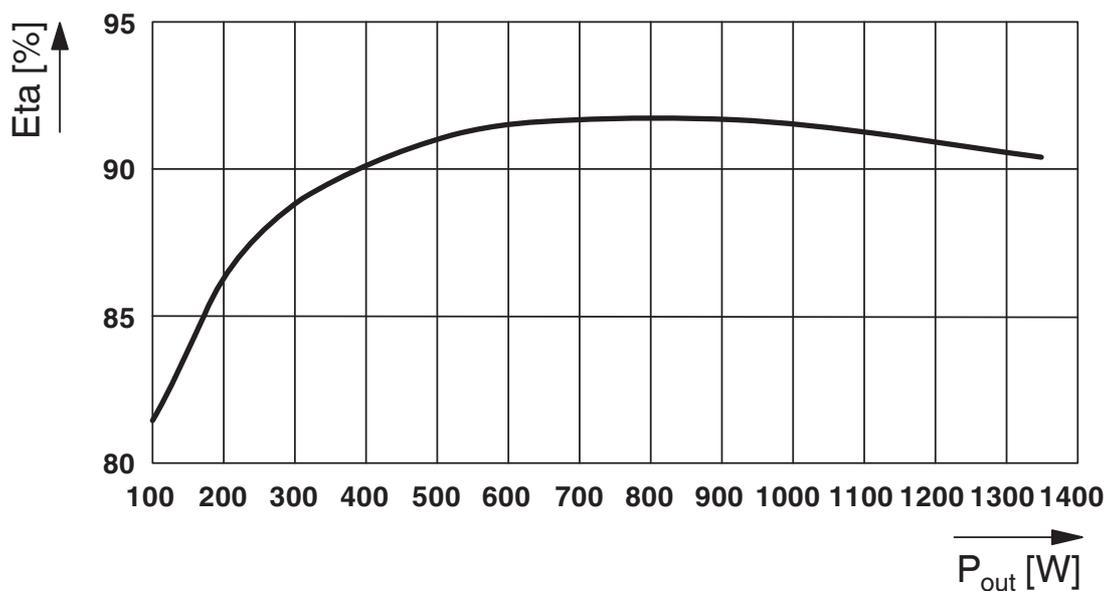

Efficiency (battery operation)

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

Graphic

Load Current	Buffertime																							
	Minutes															Hours								
	1	2	3	5	7	8	9	10	15	20	30	40	45	50	1	2	3	4	5	6	8	9	10	12
100 W	1	2	3	5	7	8	9	10	15	20	30	40	45	50	1	2	3	4	5	6	8	9	10	12
250 W																								
500 W																								
800 W																								
1000 W																								
1150 W																								
1350 W																								

The data is based on an ambient temperature of +25 °C at the start of use.

- 1x 1133819 QUINT-HP-BAT/PB/48DC/7.0AH/PT
- 2x 1133819 QUINT-HP-BAT/PB/48DC/7.0AH/PT
- 3x 1133819 QUINT-HP-BAT/PB/48DC/7.0AH/PT
- 4x 1133819 QUINT-HP-BAT/PB/48DC/7.0AH/PT
- 5x 1133819 QUINT-HP-BAT/PB/48DC/7.0AH/PT

QUINT HP UPS 1.5 kVA buffer times

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1136804>



**cULus Recognized**

Approval ID: E342453-20230513



**cUL Recognized**

Approval ID: E359066-20230828



**UL Recognized**

Approval ID: E359066-20230828

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## Classifications

### ECLASS

ECLASS-13.0	27040705
ECLASS-15.0	27040705

### ETIM

ETIM 9.0	EC000382
----------	----------

### UNSPSC

UNSPSC 21.0	39121000
-------------	----------

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## Mandatory accessories

### QUINT-HP-BAT/PB/48DC/7.0AH/PT - Battery module

1133819

<https://www.phoenixcontact.com/us/products/1133819>



Battery module (device with battery), VRLA-AGM, 48 V DC, 7 Ah

---

## Accessories

### PLT-SEC-T3-120-FM-UT - Type 3 surge protection device

2907918

<https://www.phoenixcontact.com/us/products/2907918>



Type 2/3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 120 V AC/DC

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## QUINT-HP-COM/USB-SER - Interface card

1252055

<https://www.phoenixcontact.com/us/products/1252055>



USB/RS-232/RS-485 interface card for QUINT-HP-AC UPS

---

## QUINT-HP-FAN - Fan

1252068

<https://www.phoenixcontact.com/us/products/1252068>



Replaceable fan module for QUINT-HP-AC UPS

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## MINI-SCREW-USB-DATACABLE - Data cable

2908217

<https://www.phoenixcontact.com/us/products/2908217>



Used for communication between an industrial PC and Phoenix Contact devices with USB-Mini-B connection.

---

## CABLE-USB/MINI-USB-3,0M - USB cable

2986135

<https://www.phoenixcontact.com/us/products/2986135>



USB connecting cable: USB plug type A to USB plug type Mini-B; length: 3 m

# QUINT-HP-UPS/120AC/1.5KVA/PT - Uninterruptible power supply



1136804

<https://www.phoenixcontact.com/us/products/1136804>

## POWER MANAGEMENT SUITE - Configuration software

1252232

<https://www.phoenixcontact.com/us/products/1252232>

Configuration and management software



---

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)