

DL4001 THRU DL4007

GENERAL PURPOSE SILICON RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 1.0 Ampere


FEATURES

- Glass passivated device
- Ideal for surface mounted applications
- Low leakage current
- Metallurgically bonded construction

MECHANICAL DATA

- Case: JEDEC DO-213AB, molded plastic over passivated chip
- Terminals: Solder Plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.0046 ounces, 0.116 gram
- Mounting position: Any

MELF

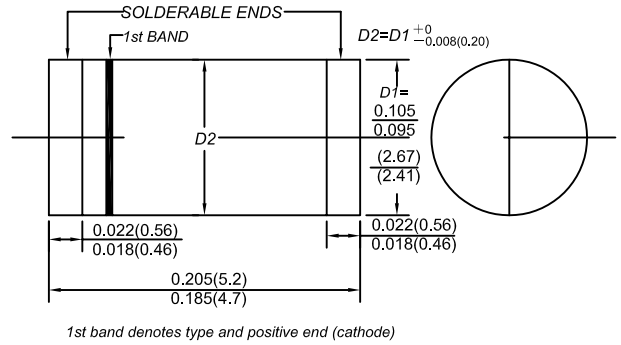

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

		DL 4001	DL 4002	DL 4003	DL 4004	DL 4005	DL 4006	DL 4007	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current $T_A=75$	$I_{(AV)}$	1.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30							A
Maximum forward voltage at 1.0A	V_F	1.1							V
Maximum DC reverse current @ $T_A=25$ at rated DC blocking voltage @ $T_A=125$	I_R	5.0							μA
Typical junction capacitance (NOTE 1)	C_j	15							pF
Typical thermal resistance (NOTE 2)	$R_{j\theta L}$	20							/W
Typical thermal resistance (NOTE 3)	$R_{j\theta A}$	50							/W
Operating temperature range	T_j	- 55 --- + 175							
Storage temperature range	T_{STG}	- 55 --- + 175							

NOTES: 1. Measured at 1.0MHz and applied average voltage of 4.0V DC.

2. Thermal resistance junction to lead, 6.0 mm² copper pads to each terminal.

3. Thermal resistance junction to ambient, 6.0 mm² copper pads to each terminal.

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

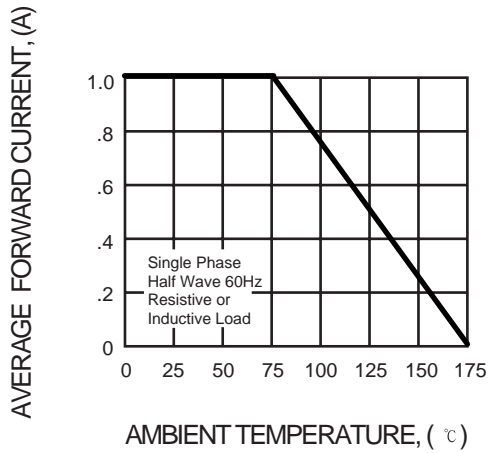


FIG. 2 - MAXIMUM NON-REPETTIVE FORWARD SURGE CURRENT

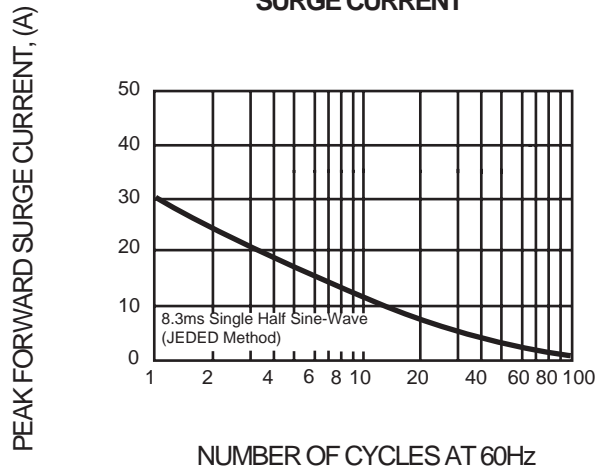


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

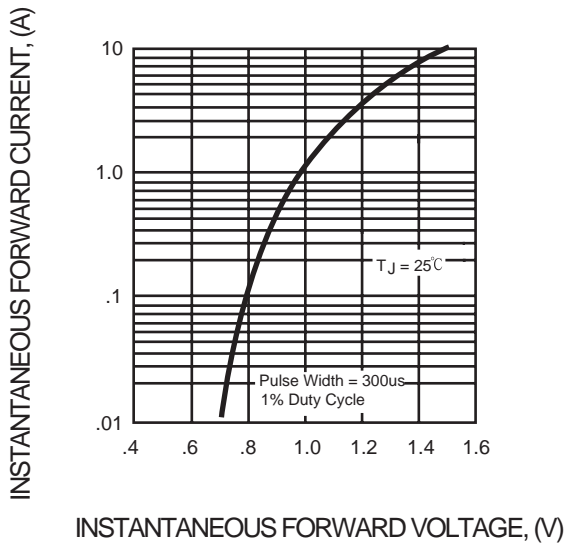


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

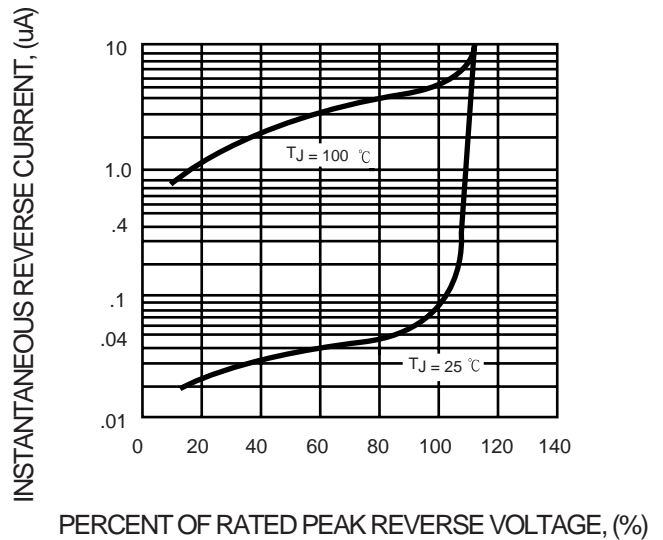


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

