



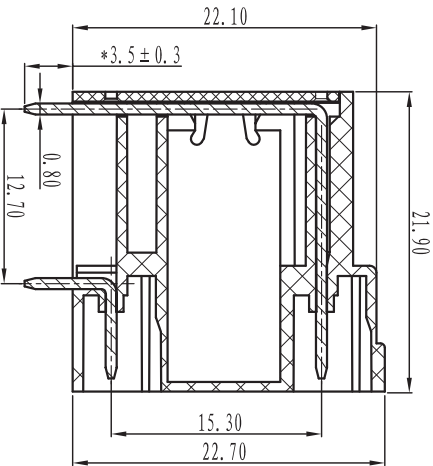

CIXI WANJIE ELECTRONIC CO., LTD

product specification

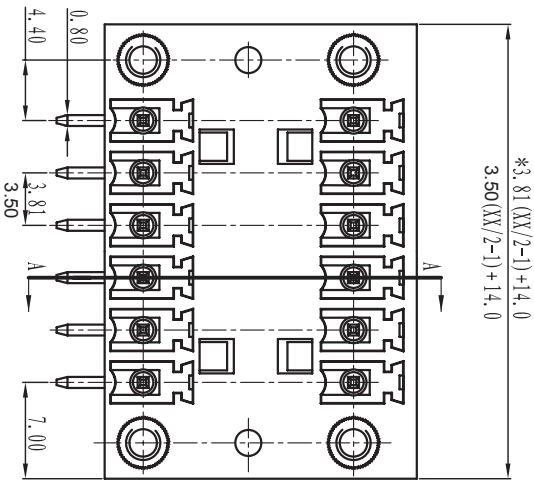

SECTION A-A

Electrical

Standard: UL IEC
Rated voltage: 300V 250V
Rated current: 8A 7A
Contact resistance: 20mΩ
Withstanding voltage: AC2000V/1Min
Insulation resistance: 5000MΩ/DC1000V

Mechanical


Temp.Range: -40° C~+105° C
MAX Soldering: +250° C, for 5 Sec

Dimensions

Pitch:3.50 mm 3.81mm
Poles: 2P-24P

Material

Housing: P166, U194-0
Pin header: Brass, Tin plated
Nut: M2.5,Brass

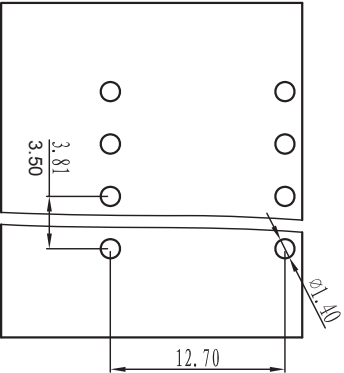

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid	≡	—	□	//	⊥
variable range	to 6	over 6	over 30	over 120	over 480	all to 6	over 10	over 50	over 120	all to 5	over 30	over 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	
CIXI WANJIE ELECTRONIC CO., LTD					WJ15B0KRM-XXP-1Y-00A	