




CIXI WANJIE ELECTRONIC CO., LTD

product specification

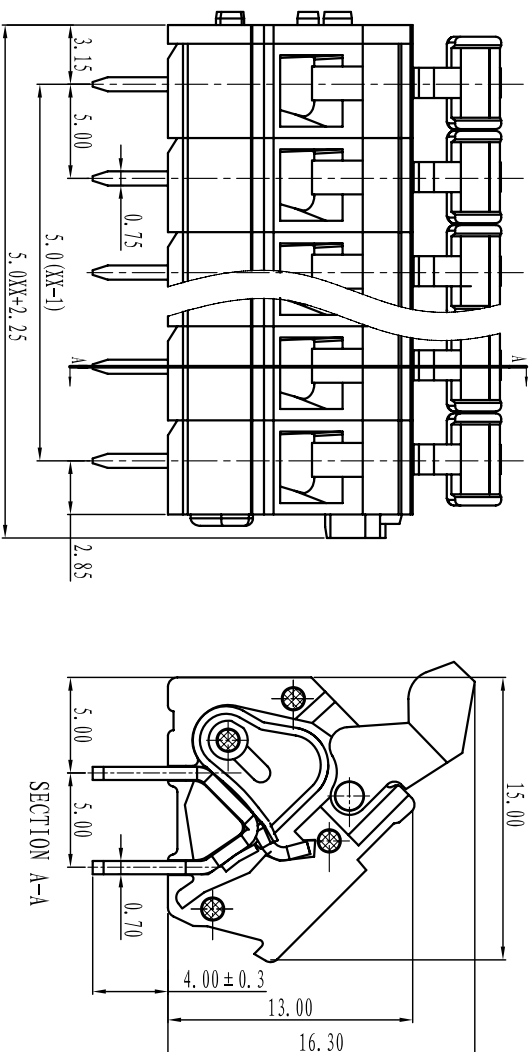

Electrical

Standard: UL IEC
Rated voltage: 300V 250V
Rated current: 10A 15A
Wire range: 26-14AWG 2.5mm²
Withstanding voltage: AC2000V/1Min
Insulation resistance: 500MΩ/DC500V

Mechanical


Temp.Range: -40° C~+105° C
MAX Soldering: +250° C, for 5 Sec
Strip length: 5-6mm

Dimensions

Pitch: 5.0mm
Poles: 1P~XXP

Material

Housing: PA66, UL94V-0
Wire guard: Stainless steel(SUS301)
Pin header: Brass, Tin plated

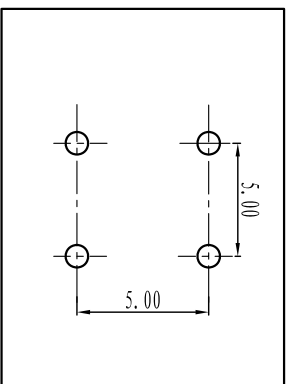

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid		—		//	
	variable range	over 6 to 6	over 30 to 120	over 120 to 480	over 480 to all	all to 6	over 6 to 10	over 10 to 50	over 50 to 120	all to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1 to 6	±0.2 to 30	±0.3 to 120	±0.5 to 480	±0.9 to all	±0.2 to 6	±0.5 to 10	±1 to 50	1° to 120	30' to 20'	10' to 0.5	0.025 to 0.06	0.12 to 0.4	

FIRST ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

NAME

WJ243A-5.0-XXP-1Y-00A