
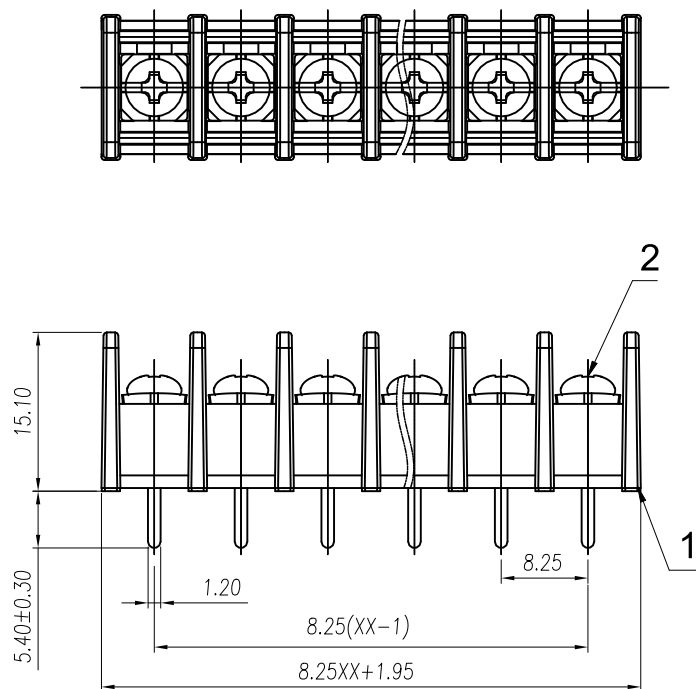



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文档的内容。侵犯者将承担赔偿责任。本公司保留所有权利及专利权。 未经授权, 不得复制或传播。

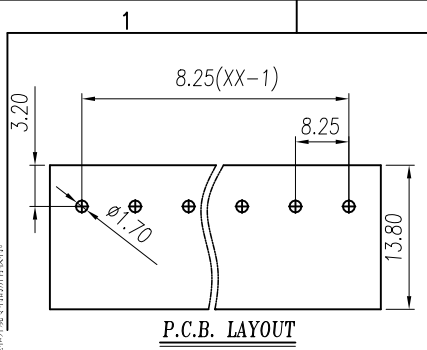

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0			ZhaoXY	24.04.01

/Electrical	
/Rated voltage	300V
/Rated current	15A
/Contact resistance	20mΩ
/Insulation resistance	500MΩ/DC500V
/Wire range	22~12AWG
/With standing voltage	AC 1600V/1 Min
/Mechanica	
/Torque	0.5Nm(4.5Lb.in)
/Temp.Range	-40°C~+105°C
/MAX Soldering	+260°C, for 5 Sec
/Dimensions	
/Pitch	8.25mm
/Poles	2~26p

General Tolerances								— □ ⊥		
variable range	to	over	over	over	over	over	over	to	over	over
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to	to 10	10 to 100	100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

3		Pin Header		Copper Alloy		Sn Plated	
2		Screws		Steel		M3 Steel Ni plated	
1		Housing		PA66		UL94V-0	
ITEM		NAME OF PART		MATERIAL		NOTES	
DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	
						REV	V1
 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ35S-XXP-1Y-00A	

FOR-0371 Rev.1.0