


The Best lm/W in Full Color Products

Full Color LED - 3528 Series

STF0A36C-03 (Full Color)



Product Brief

Description

- This surface-mount LED comes in standard package dimension (3.5mmx2.8mmx1.8mm). It has a substrate made up of a molded plastic reflector sitting on top of a bent lead frame. The die is attached within the reflector cavity and the cavity is encapsulated by silicone.
- The package design coupled with careful selection of component materials allow these products to perform with high reliability.

Features and Benefits

- Reflector type package
- Market standard 3528 package
- 3 chips in a package
- Low Thermal Resistance
- Red, Green, Blue color & White balance
- UL certification
- RoHS compliant

Key Applications

- Advertising light
- Electric appliance
- Other decoration lighting

Table 1. Product Selection Table

Part Number	Dominant wavelength [nm]			
	Color	Min.	Typ.	Max.
STF0A36C-03	Red	618	623	628
	Green	520	525	530
	Blue	465	470	475

Table of Contents

Index		
•	Product Brief	1
•	Table of Contents	2
•	Performance Characteristics	3
•	Characteristics Graph	4
•	Color Bin Structure	7
•	Bin Code Description	8
•	Mechanical Dimensions	9
•	Reflow Soldering Characteristics	10
•	Emitter Tape & Reel Packaging	11
•	Product Nomenclature	13
•	Handling of Silicone Resin for LEDs	14
•	Precaution For Use	15
•	Company Information	18

Performance Characteristics

Table 2. Characteristics, $I_F=20\text{mA}$, $T_j=25^\circ\text{C}$, RH30%

Parameter	Color	Symbol	Condition	Value			Unit
				Min	Typ	Max	
Forward Voltage	Red	V_F	$I_F = 20 \text{ mA}$	1.9	2.1	2.5	V
	Green			2.6	2.8	3.1	
	Blue			2.7	3.0	3.3	
Luminous Flux	Red	I_V	$I_F = 20 \text{ mA}$	-	3.3	-	lm
	Green			-	9.0	-	
	Blue			-	2.0	-	
Dominant wavelength	Red	λ_d	$I_F = 20 \text{ mA}$	-	623	-	nm
	Green			-	525	-	
	Blue			-	470	-	
Viewing Angle	R,G,B	$2\theta_{1/2}$	$I_F = 20 \text{ mA}$	-	120	-	°
Thermal Resistance (J to S)	R,G,B	$R\theta_{J-S}$	$I_F = 20 \text{ mA}$	-	45	-	°C/W
ESD Sensitivity(HBM)	-	Class 1B JESD22-A114-E					

Table 3. Absolute maximum ratings

Parameter	Symbol	Value			Unit
		Red	Green	Blue	
Power Dissipation	P_d	144	186	198	mW
Forward Current	I_F	60	60	60	mA
Forward Voltage	V_F	2.4	3.1	3.3	V
Junction Temperature	T_j	110	125	125	°C
Operation Temperature	$T_{opr.}$	-40 ~ 100			°C
Storage Temperature	$T_{stg.}$	-40 ~ 100			°C

- (1) Seoul Semiconductor maintains a tolerance of $\pm 7\%$ on Intensity and power measurements.
- (2) Thermal resistance is junction to Solder.
- (3) The products are sensitive to static electricity and must be carefully taken when handling products
- (4) Tolerance : $\lambda_D \pm 2 \text{ nm}$, $V_F \pm 0.1 \text{ V}$

- **Calculated performance values are for reference only.**
- **All measurements were made under the standardized environment of Seoul Semiconductor.**

Characteristics Graph

Fig 1. Forward Voltage vs. Forward Current, $T_j = 25^\circ\text{C}$


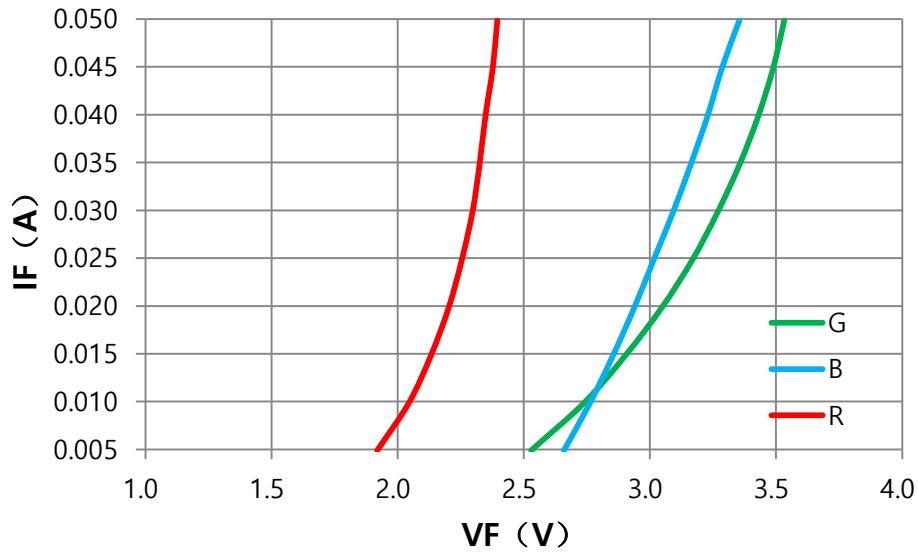


Fig 2. Forward Current vs. Relative Luminous Flux, $T_j = 25^\circ\text{C}$

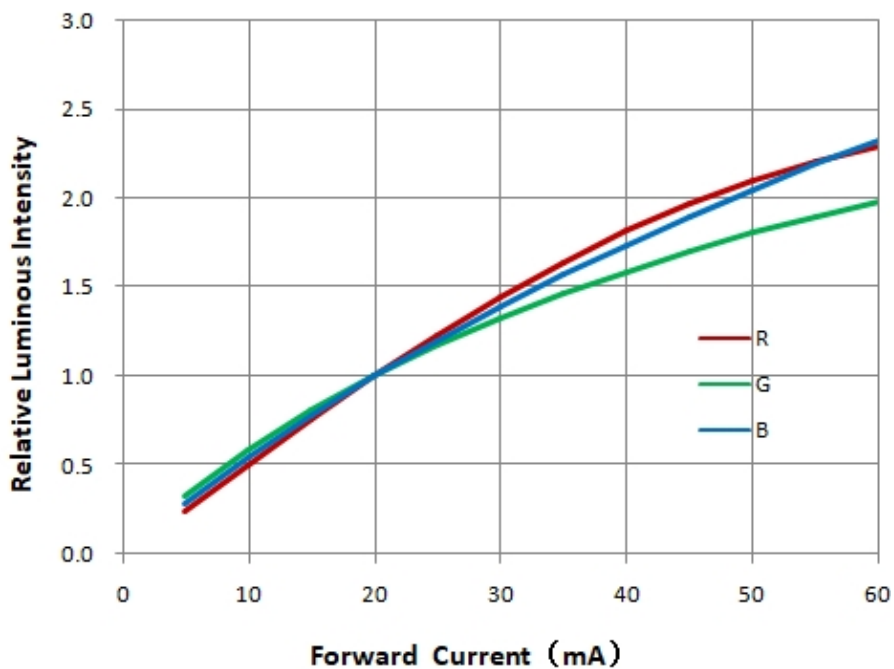

Characteristics Graph

Fig 3. Radiant Pattern, $T_j = 25^\circ\text{C}$, $I_F = 20\text{mA}$


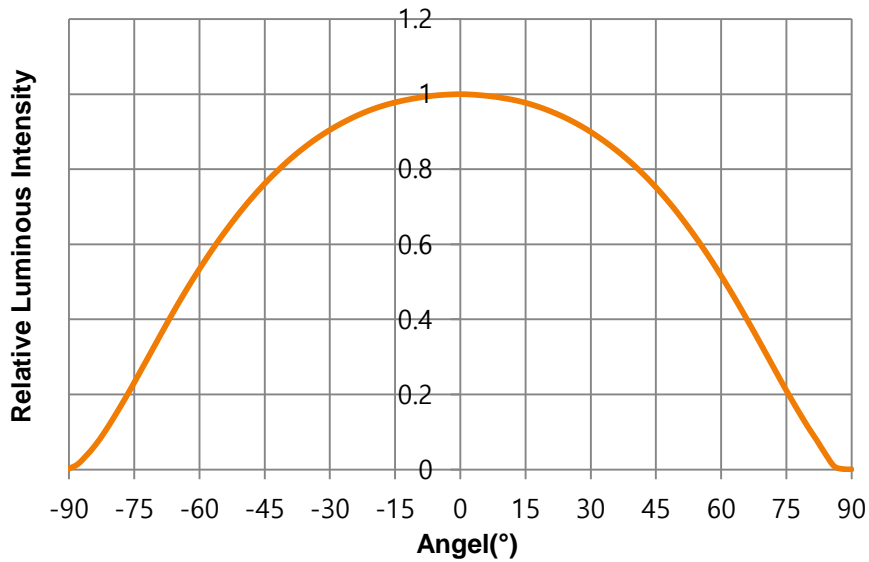


Fig 4. Forward Current vs. Derating Curve, $T_a = 25^\circ\text{C}$

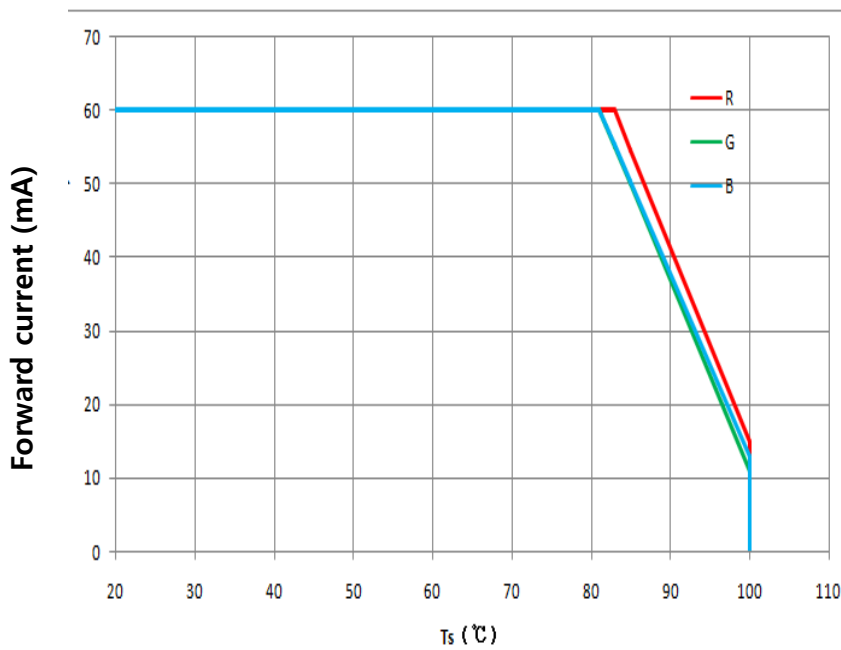

Characteristics Graph

Fig 5. Junction Temperature vs. Relative Luminous Intensity, $I_F=20\text{mA}$


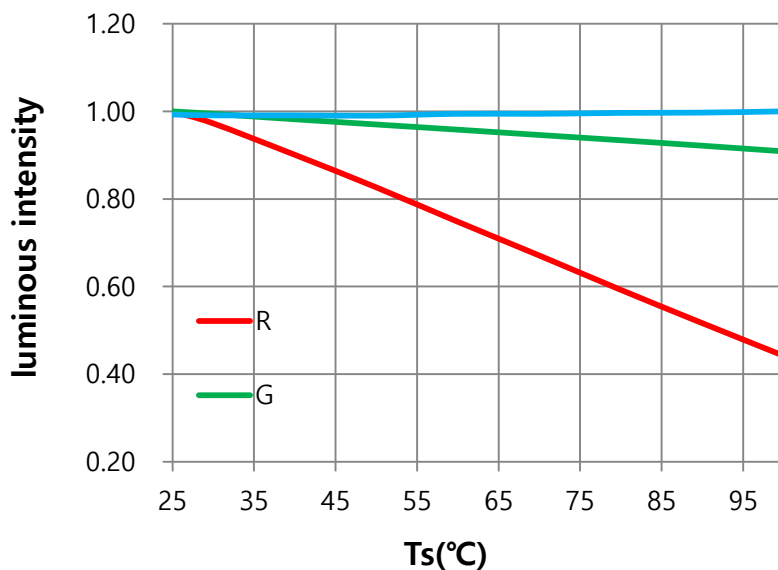


Fig 6. Junction Temperature vs. Relative Forward Voltage, $I_F=20\text{mA}$

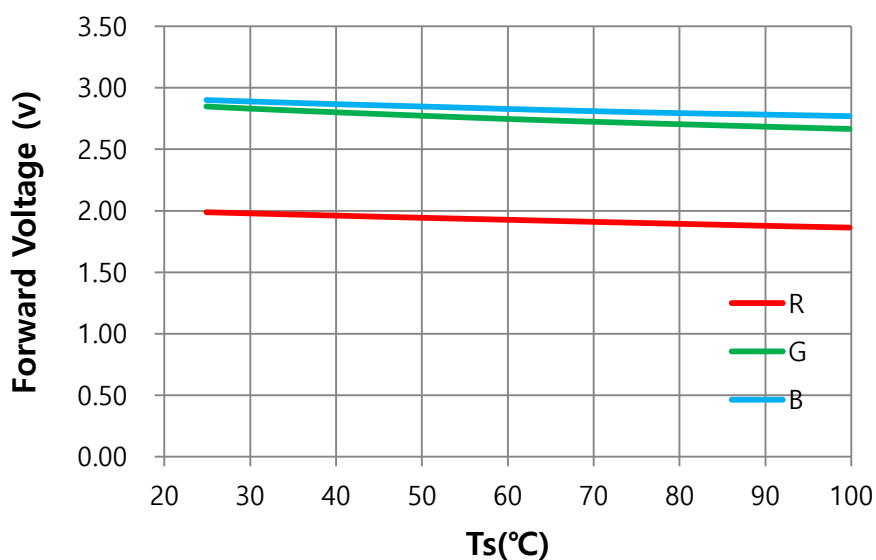


Color Bin Structure

Table 6. Bin Code Description $T_j=25^{\circ}\text{C}$, $I_F=20\text{mA}$


Part Number	Luminous Flux (lm)		
	Bin Code	Min.	Max.
Red	AA	2.4	2.7
	AB	2.7	3.0
	AC	3.0	3.3
	AD	3.3	3.7
Green	BA	7.5	8.5
	BB	8.5	9.5
	BC	9.5	10.5
Blue	CA	1.5	1.9
	CB	1.9	2.3
	CC	2.3	2.7

Color	Dominant wavelength [nm]		
	Bin Code	Min.	Max.
Red	R1	618	623
	R2	623	628
Green	G1	520	525
	G2	525	530
Blue	B1	465	470
	B2	470	475

Mechanical Dimensions




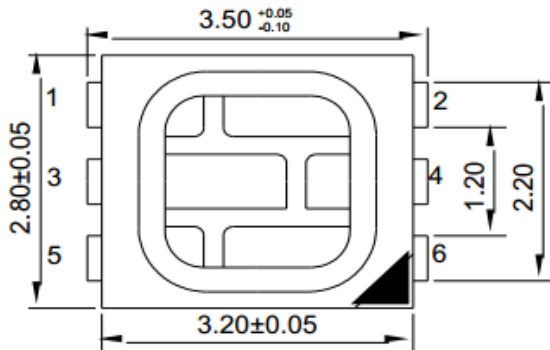


TOP VIEW

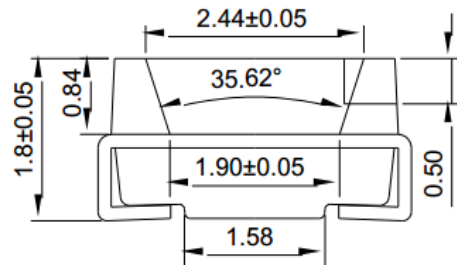

SIDE VIEW


BOTTOM VIEW

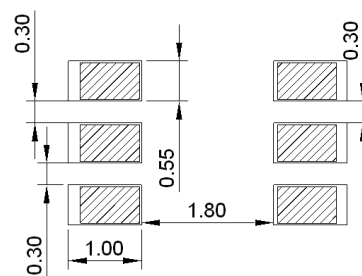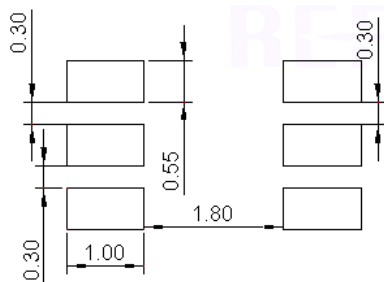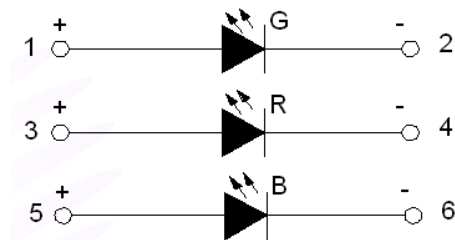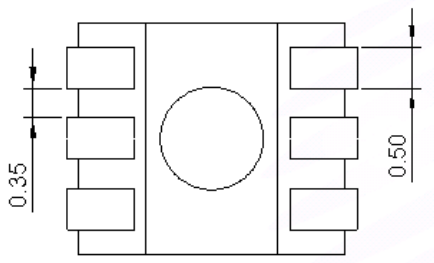

Notes :

- (1) Recommended Metal Mask Thickness : 0.12mm

Reflow Soldering Characteristics


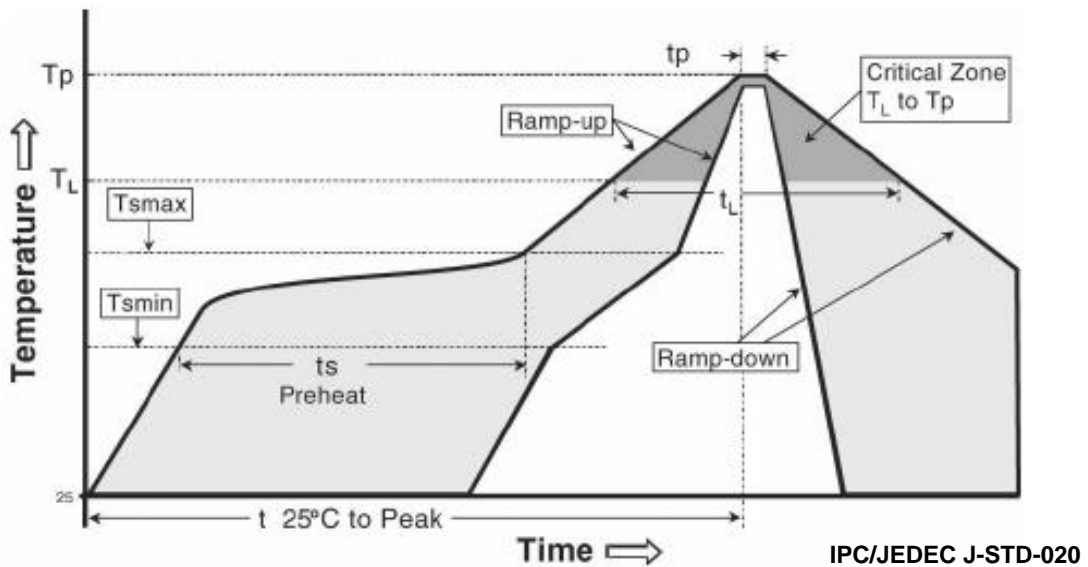


Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate (T _{smax} to T _p)	3° C/second max.	3° C/second max.
Preheat <ul style="list-style-type: none"> - Temperature Min (T_{smin}) - Temperature Max (T_{smax}) - Time (T_{smin} to T_{smax}) (ts) 	100 °C 150 °C 60-120 seconds	150 °C 200 °C 60-180 seconds
Time maintained above: <ul style="list-style-type: none"> - Temperature (T_L) - Time (t_L) 	183 °C 60-150 seconds	217 °C 60-150 seconds
Peak Temperature (T _p)	215°C	260°C
Time within 5°C of actual Peak Temperature (tp)2	10-30 seconds	20-40 seconds
Ramp-down Rate	6 °C/second max.	6 °C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

Caution

- (1) Reflow soldering is recommended not to be done more than two times. In the case of more than 24 hours passed soldering after first, LEDs will be damaged.
- (2) Repairs should not be done after the LEDs have been soldered. When repair is unavoidable, suitable tools must be used.
- (3) Die slug is to be soldered.
- (4) When soldering, do not put stress on the LEDs during heating.
- (5) After soldering, do not warp the circuit board.

Emitter Tape & Reel Packaging

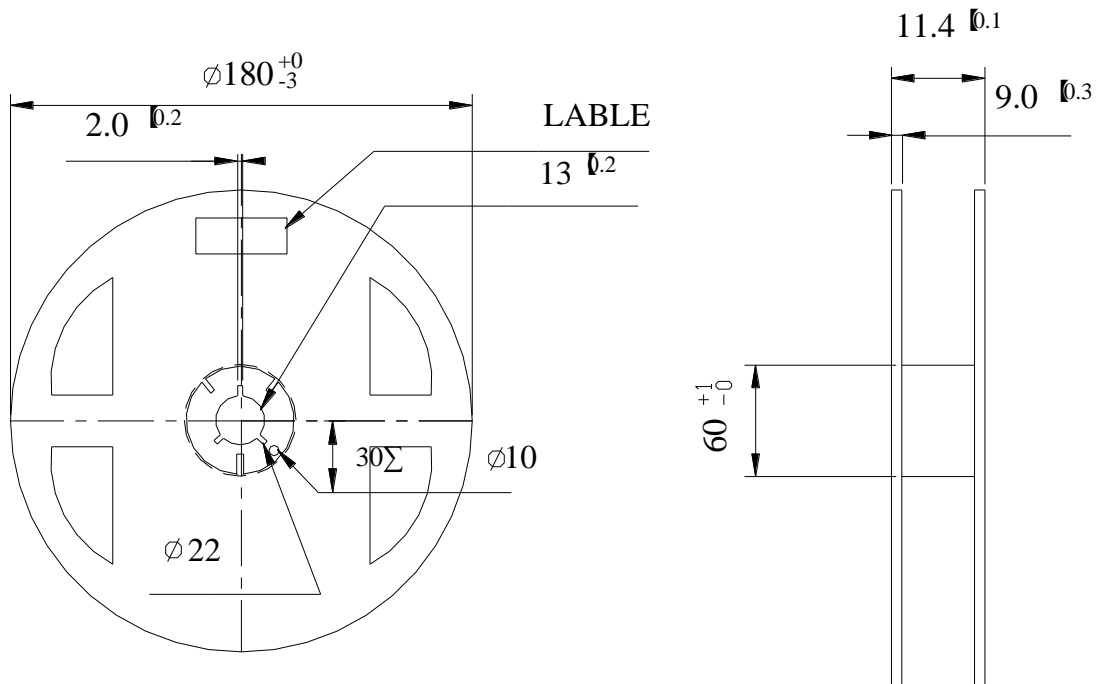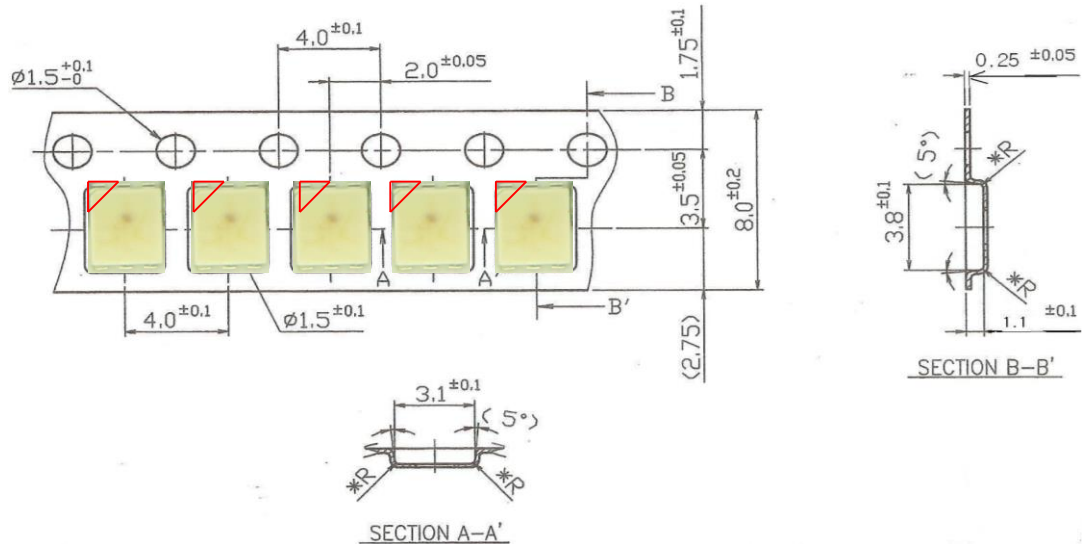


(Tolerance: ± 0.2 , Unit: mm)

- (1) Quantity : 2,000 pcs/Reel
- (2) Cumulative Tolerance : Cumulative Tolerance/10 pitches to be ± 0.2 mm
- (3) Adhesion Strength of Cover Tape : Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of 10° to the carrier tape
- (4) Package : P/N, Manufacturing data Code No. and quantity to be indicated on a damp proof Package


Emitter Tape & Reel Packaging

Reel

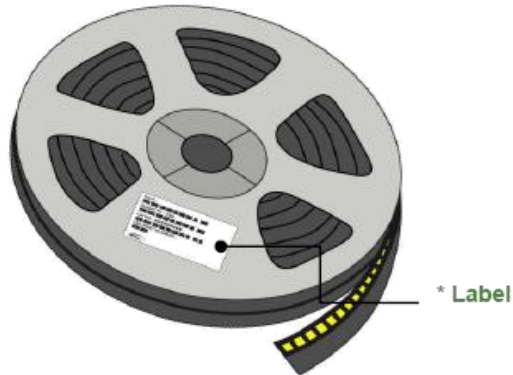

Aluminum Bag

* Label

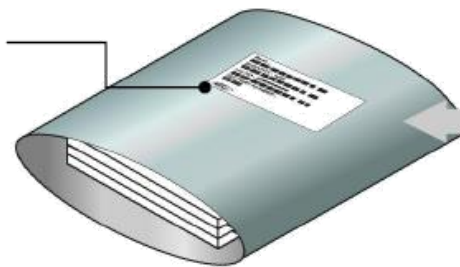

Humidity Indicator

Desiccant

Outer Box



* Label

Product Nomenclature

Table 7. Part Numbering System : $X_1X_2X_3X_4X_5X_6X_7X_8$

Part Number Code	Description	Part Number	Value
X_1	Company	S	
X_2	Top View LED series	T	
X_3X_4	Color Specification	F0	Full Color
X_5	Package series	A	A series
X_6X_7	Characteristic code	36	
X_8	Revision	C-03	Version

Table 8. Lot Numbering System : $Y_1Y_2Y_3Y_4Y_5Y_6Y_7Y_8Y_9Y_{10}-Y_{11}Y_{12}Y_{13}Y_{14}Y_{15}Y_{16}Y_{17}$


Lot Number Code	Description	Lot Number	Value
Y_1Y_2	Year		
Y_3	Month		
Y_4Y_5	Day		
Y_6	Top View LED series		
$Y_7Y_8Y_9Y_{10}$	Mass order		
$Y_{11}Y_{12}Y_{13}Y_{14}Y_{15}Y_{16}Y_{17}$	Internal Number		

Handling of Silicone Resin for LEDs

(1) During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound.



(2) In general, LEDs should only be handled from the side. By the way, this also applies to LEDs without a silicone sealant, since the surface can also become scratched.

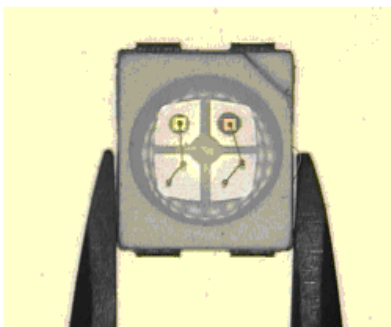

(3) When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the surface of the resin must be prevented. This is assured by choosing a pick and place nozzle which is larger than the LED's reflector area.

(4) Silicone differs from materials conventionally used for the manufacturing of LEDs. These conditions must be considered during the handling of such devices. Compared to standard encapsulants, silicone is generally softer, and the surface is more likely to attract dust.

As mentioned previously, the increased sensitivity to dust requires special care during processing. In cases where a minimal level of dirt and dust particles cannot be guaranteed, a suitable cleaning solution must be applied to the surface after the soldering of components.

(5) SSC suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the package or resin.

Ultrasonic cleaning is not recommended. Ultrasonic cleaning may cause damage to the LED.

(6) Please do not mold this product into another resin (epoxy, urethane, etc) and do not handle this product with acid or sulfur material in sealed space.

Precaution for Use

(1) Storage

To avoid the moisture penetration, we recommend store in a dry box with a desiccant.

The recommended storage temperature range is 5°C to 30°C and a maximum humidity of RH50%.

(2) Use Precaution after Opening the Packaging

Use proper SMT techniques when the LED is to be soldered dipped as separation of the lens may affect the light output efficiency.

Pay attention to the following:

a. Recommend conditions after opening the package

- Sealing

- Temperature : 5 ~ 30°C Humidity : less than RH60%

b. If the package has been opened more than 4 week(MSL_2a) or the color of the desiccant changes, components should be dried for 10-24hr at 65±5°C

(3) Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering.

(4) Do not rapidly cool device after soldering.

(5) Components should not be mounted on warped (non coplanar) portion of PCB.

(6) Radioactive exposure is not considered for the products listed here in.

(7) Gallium arsenide is used in some of the products listed in this publication.

These products are dangerous if they are burned or shredded in the process of disposal.

It is also dangerous to drink the liquid or inhale the gas generated by such products when chemically disposed of.

(8) This device should not be used in any type of fluid such as water, oil, organic solvent and etc.

When washing is required, IPA (Isopropyl Alcohol) should be used.

(9) When the LEDs are in operation the maximum current should be decided after measuring the package temperature.

(10) LEDs must be stored properly to maintain the device. If the LEDs are stored for 3 months or more after being shipped from SSC, a sealed container with a nitrogen atmosphere should be used for storage.

Precaution for Use

- (11) The appearance and specifications of the product may be modified for improvement without notice.
- (12) Long time exposure of sunlight or occasional UV exposure will cause lens discoloration.
- (13) VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate silicone encapsulants of LEDs and discolor when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture. Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues.
- (14) Attaching LEDs, do not use adhesives that outgas organic vapor.
- (15) The driving circuit must be designed to allow forward voltage only when it is ON or OFF.
If the reverse voltage is applied to LED, migration can be generated resulting in LED damage.
- (16) Similar to most Solid state devices;
LEDs are sensitive to Electro-Static Discharge (ESD) and Electrical Over Stress (EOS).
Below is a list of suggestions that Seoul Semiconductor purposes to minimize these effects.

a. ESD (Electro Static Discharge)

Electrostatic discharge (ESD) is defined as the release of static electricity when two objects come into contact. While most ESD events are considered harmless, it can be an expensive problem in many industrial environments during production and storage. The damage from ESD to LEDs may cause the product to demonstrate unusual characteristics such as:

- Increase in reverse leakage current lowered turn-on voltage
- Abnormal emissions from the LED at low current

The following recommendations are suggested to help minimize the potential for an ESD event.
One or more recommended work area suggestions:

- Ionizing fan setup
- ESD table/shelf mat made of conductive materials
- ESD safe storage containers

One or more personnel suggestion options:

- Antistatic wrist-strap
- Antistatic material shoes
- Antistatic clothes

Environmental controls:

- Humidity control (ESD gets worse in a dry environment)

Precaution for Use

b. EOS (Electrical Over Stress)

Electrical Over-Stress (EOS) is defined as damage that may occur when an electronic device is subjected to a current or voltage that is beyond the maximum specification limits of the device.

The effects from an EOS event can be noticed through product performance like:

- Changes to the performance of the LED package
(If the damage is around the bond pad area and since the package is completely encapsulated the package may turn on but flicker show severe performance degradation.)
- Changes to the light output of the luminaire from component failure
- Components on the board not operating at determined drive power

Failure of performance from entire fixture due to changes in circuit voltage and current across total circuit causing trickle down failures. It is impossible to predict the failure mode of every LED exposed to electrical overstress as the failure modes have been investigated to vary, but there are some common signs that will indicate an EOS event has occurred:

- Damaged may be noticed to the bond wires (appearing similar to a blown fuse)
- Damage to the bond pads located on the emission surface of the LED package
(shadowing can be noticed around the bond pads while viewing through a microscope)
- Anomalies noticed in the encapsulation and phosphor around the bond wires
- This damage usually appears due to the thermal stress produced during the EOS event

c. To help minimize the damage from an EOS event Seoul Semiconductor recommends utilizing:

- A surge protection circuit
- An appropriately rated over voltage protection device
- A current limiting device

Company Information

Published by

Seoul Semiconductor © 2013 All Rights Reserved.

Company Information

Seoul Semiconductor (www.SeoulSemicon.com) manufactures and packages a wide selection of light emitting diodes (LEDs) for the automotive, general illumination/lighting, Home appliance, signage and back lighting markets. The company is the world's fifth largest LED supplier, holding more than 10,000 patents globally, while offering a wide range of LED technology and production capacity in areas such as "nPola", "Acrich", the world's first commercially produced AC LED, and "Acrich MJT - Multi-Junction Technology" a proprietary family of high-voltage LEDs.

The company's broad product portfolio includes a wide array of package and device choices such as Acrich and Acirch2, high-brightness LEDs, mid-power LEDs, side-view LEDs, and through-hole type LEDs as well as custom modules, displays, and sensors.

Legal Disclaimer

Information in this document is provided in connection with Seoul Semiconductor products. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Seoul Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party. The appearance and specifications of the product can be changed to improve the quality and/or performance without notice.