



Data Sheet

Customer:

Part No:

CLQ-3042AUW-11T(CLOCK)

Sample No:

Description:


0.3 inch 4 Digit White Color

Item No:

Customer			
Check	Inspection	Approval	Date


Descriptions

1. Emitting color: White
2. Lens color: White Diffused
3. Surface ink color : Black
4. Dice material: InGaN/GaN
5. Mask Material: Black fluorescein 0.125 PET

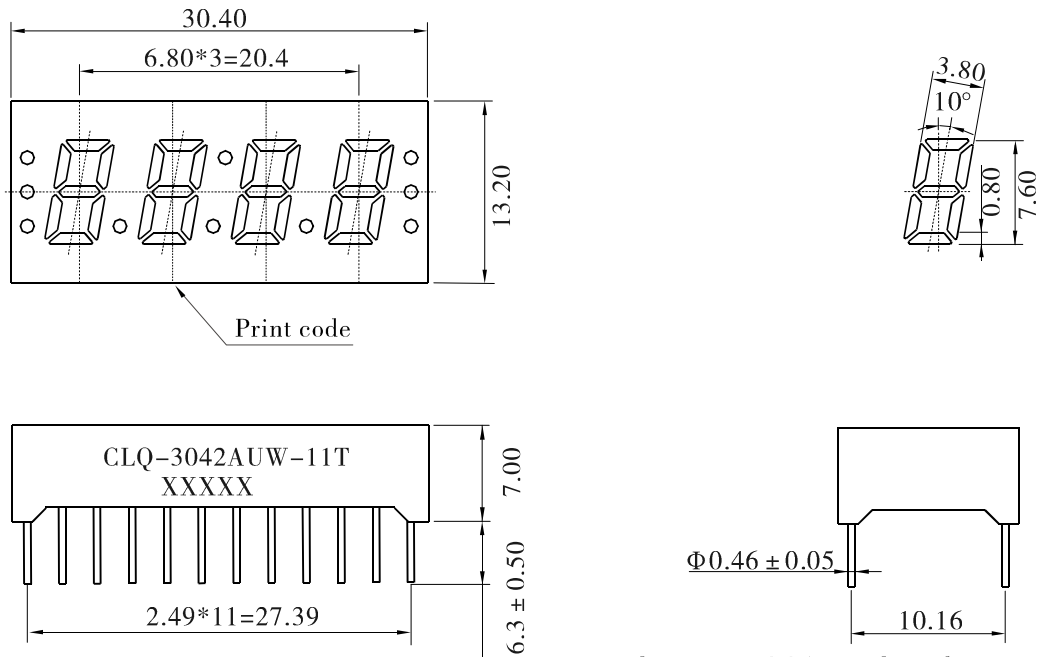

Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted, Unit=mm
Pin bending $\leq \text{length} * 1\%$

Internal Circuit Diagram(C.C.)

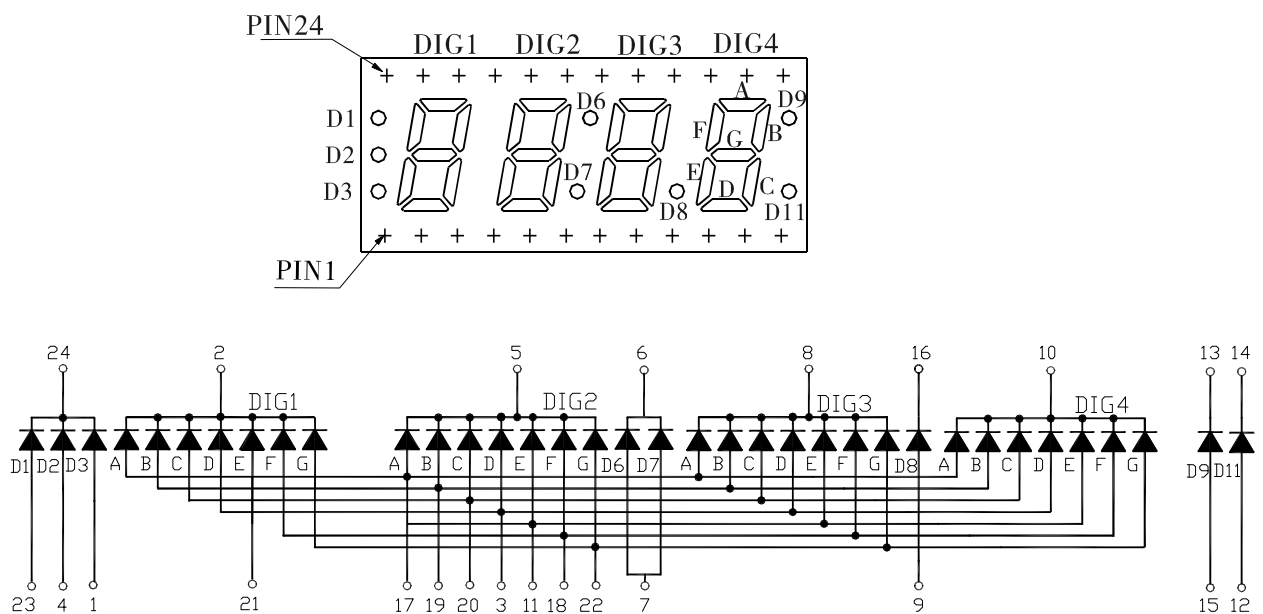





Electrical optical characteristics (Ta=25℃)

Parameter	Symbol	White			Unit	Test Condition
		Min	Typ	Max		
Forward Voltage	V _F	2.8	3.1	3.4	V	IF=20mA
Luminous Intensity	I _V	13.7	37.2	---	med	IF=10mA
Chromaticity Coordinates	X	---	0.28	---	---	IF=20mA
	Y	---	0.29	---		
Reverse Leakage Current	I _R	---	---	50	μA	V _R =5V


Absolute maximum parameters (Ta=25℃)

Parameter	Symbol	Condition	Rating	Unit
Power Dissipation	PD	---	90	mW
Reverse Voltage	V _R	---	5	V
Forward Average Current	I _F	---	25	mA
Temperature coefficient	I/C	---	0.33	mA/℃
Pulse Current	I _{FP}	Duty=1/10,1kHz	100	mA
Operating Temperature Range	T _{opr}	---	-25 ~ +85	℃
Storage Temperature Range	T _{stg}	---	-30 ~ +100	℃
Soldering Condition	T _{sd}	---	265℃/5sec	℃

Typical Electro-Optical characteristic curves ($T_a=25^{\circ}\text{C}$)

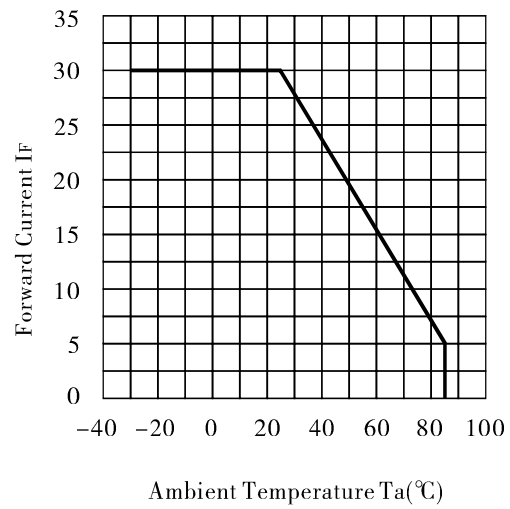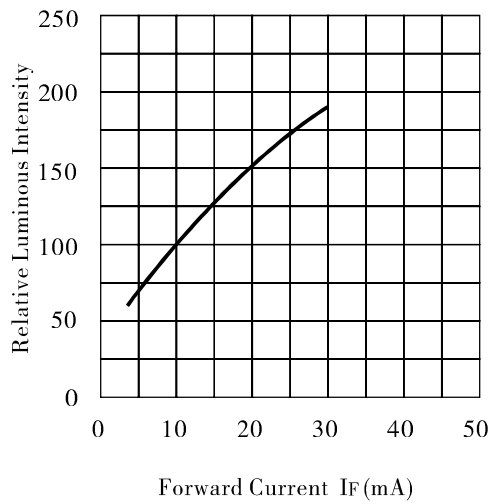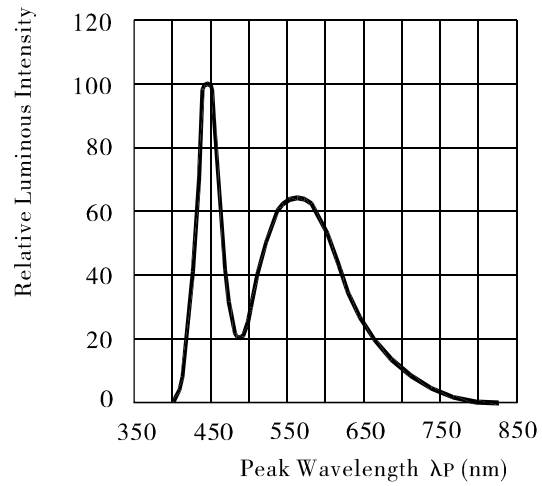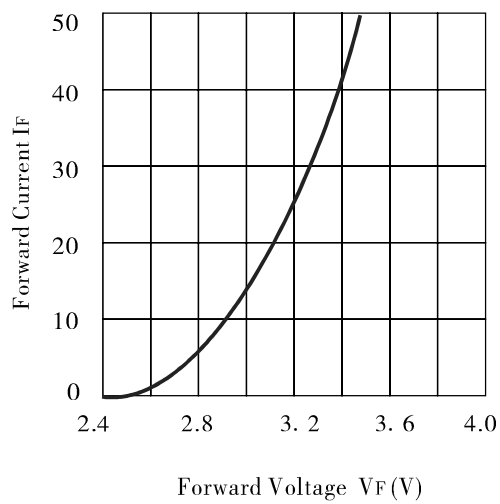

Film

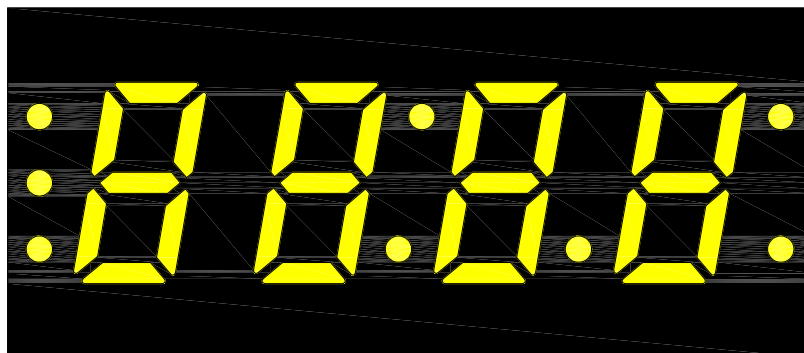

Reliability Test Conditions

Test Item	Test Condition	Result	Judgment Criteria
Consecutive operating life test	IF=20mA, T=25℃, t=168h	0/10	Forward Voltage $V_F(V) = \text{Upper Limit} \times 1.2$ Reverse Leakage Current $I_R(\mu A) = \text{Upper Limit} \times 2.0$ Luminous Intensity IV $(mcd) = \text{Lower Limit} \times 0.7$
High temperature storage life test	T=100℃, t=168h	0/10	
Low temperature storage life test	T=-25℃, t=168h	0/10	
High temperature humidity storage life test	T=85 ± 2℃, RH=85% ± 3, t=168h	0/10	
Temperature cycle test	-25℃~25℃~100℃ 30min 5min 30min 10cycles	0/10	
Thermal shock test	100℃ 0℃ 5min 5min 20cycles	0/10	
Soldering heat test	T=260 ± 5℃, t=10s ± 1s	0/10	
Solderability test	T=235 ± 5℃, t=5s ± 0.5s	0/10	Steeped Part ≥ 95%
Fall test	h=100cm, 50times	0/10	Surface Appearance Photoelectric Properties Intact
Terminal strength test	W=9.8N, t=30 ± 5s	0/10	
Lead bending test	W=4.9N, 2times	0/10	